

Product

CATALOG



RED-WHITE VALVE CORP.

INDEX

Lead Free Eco-Valve

Standard Valve *not suitable for potable water service*

Commercial & Industrial

Hydronics

Ball Valve

5044AB / 5049AB	1
5060AB / 5063AB	2
5065AB	2
5544AB / 5549AB	1
5586AB	2
5592AB / 5595AB	1
5592ABW / ABWNS	2
5595ABW	2

Pump Flange Valve

2417AB / 2419AB	3
-----------------	---

Mini Ball Valve

5081/82/83/84AB	3
-----------------	---

EzPress / EzGRIP

5020AB/ABD/ABX	4
5020ABS	4
5026AB	4
5520AB / 5520ABX	4
5070AB	4

PP-R & PP-RCT Valve

1500AB / 1515AB	3
1501AB / 1516AB	3
1501PAB / 1516PAB	3

PEX (F1807) Valve

5004AB/ABW	5
5006AB/ABW	5
5007AB/ABW	5
5008AB/ABW	5
5009AB/ABD/ABF	
ABW/ABDF	5
RW-316AB	7
RW-516AB	7

PEX (F1960) Valve

5014AB/ABW	6
5015AB/ABD/ABF	
ABW/ABDF	6
5016AB/ABW	6
5017AB/ABW	6
5018AB/ABW	6
5019AB	7

PEX Everloc+® Valve

5414AB/ABW	8
5415AB/ABD/ABW	8
5416AB/ABW	8
5417AB/ABW	8
5418AB/ABW	8

Water Heater Valve

3400RAB / SAB / TAB	9
3420RAB / SAB / TAB	9
3430RAB / SAB / TAB	9
Tankless Contractor Kit	9
3400LRAB/LSAB/LTAB	10
3420LRAB/LSAB/LTAB	10
3430LRAB/LSAB/LTAB	10
3300AB	10
3320AB	10
3330AB	10
Hot / Cold Valves	11-12

Butterfly Valve

938BESLAB	13
938BESGAB	13

Balancing Valve

9517AB / 9519AB	13
9527AB / 9529AB	13

Gate Valve

206AB / 207AB	14
267AB / 268AB	14

Strainer

380AB / 387AB	14
---------------	----

Check Valve

232AB / 233AB	14
236AB / 237AB	15
246AB / 247AB / 244AB	15

Dielectric Union

1900AB	15
--------	----

Plumbing Valve

RW-315AB	16
RW-315ABBLUE	16
RW-316AB	16
RW-320AB	16
RW-301AB	16
RW-504AB / RW-505AB	17
RW-514AB / RW-516AB	17
RW-213AB / RW-223AB	17
RW-252AB / RW-272AB	17

Accessories

Acce.	18-19
-------	-------

Ball Valve

5042	21
5045	21
5044F / 5049F	20
5080B / 5080BSS	20
5090	21
5544S	21
5581	21
5586	21
5592F / 5595F	20

EzPress / EzGRIP / PEX

250	22
5017SMW	22
5020 / 5023	22
5024	22
5070	22

Pump Flange Valve

2412 / 2415 / 2422F	23
2417 / 2419	23
2420F	23

Actuated Ball Valve

5930	23
------	----

Actuator

Sloop 2	30
---------	----

Mini Ball Valve

5081/82/83/84	23
---------------	----

CSA Gas Ball Valve

5100	24
5200 / 5200T / 5200S	24
5210/11/12/21	24
5231	24
5241	24

Gate Valve

204A	27
207	27
208A	26
208B	26
206F / 207F	25
267 / 268	25
267CH	25
280	27
280B	26
298	27
318A	27

Globe Valve

210	28
211 / 220	28
211B / 211BT	26
214	28
221	28
260A	28

Check Valve

232 / 233	29
236B / 236BT	26
236F	29
238	29
246	29
360	29

Strainer

380F / 387F	30
-------------	----

Polypropylene / PVC

5071PP	30
RW-302PP	30
RW-302PPBLUE	30
RW-305PP	30

Plumbing Valve

RW-272	31
RW-275	31
RW-312	31
RW-315	31
RW-504 / RW-505	31
RW-515	31

Radiator Valve

9101F	32
9103F	32
9105F	32
9107	32
9107F	32
9150F / 9153F	32

Accessories

Acce.	33
-------	----

Bronze Valve

5080B	34
5080BSS	34
280B	34
208B	34
211B / 211BT	34
236B / 236BT	34

Bronze Strainer

380F	35
------	----

PEX

5019AB	35
--------	----

Carbon Steel

7550	35
7770	35

Flange Ball Valve

5800L / 5800G	35
---------------	----

Stainless Steel Valve

880	36
882	36
884	36
889	36
4550	36
4660	36
4880	36

Cast Iron Strainer

381 / 382	37
-----------	----

Cast Iron Valve

400	37
415	37
421	37
435	37
442 / 445	38
452	38
462 / 465	38

Balancing Valve

9957W	39
9574P	39

Butterfly Valve

937	39-41
938	41-43

Actuator for Butterfly Valve

Cutter	44
Hovercraft	44

PP-R / PP-RCT / PEX

1500AB / 1515AB	45
1515AB / 1516AB	45
1501PAB / 1516PAB	45

Balancing Valve

9407	48
9450A	48
9517 / 9519	47
9517AB / 9519AB	46
9517IBV	47
9517T-PP	47
9527AB / 9529AB	48
9574P	48
9707R	46
9707T	46
9707IBV	46
9907T	49
9907IBV	49
9957W	49

Insulation

95INSL / 99INSL	49
-----------------	----

Coil Kit

CKA	50
CKS	50
CKM	50
CKP	50
CK	50
WSHP	51

Hose & Union

92HS	51
92UN	51
92MU	51
92T	52

Combo Strainer

92ST / 92SS / 92SP	52
92ST-BY / 92SS-BY /	
92SP-BY	52
92SEC	52

Union Ball Valve

92UBT / UBS / UBP	53
92UDT / UDS / UDP	53

Ball / Drain Valves

99IBV	51
241DV	53
9800 2 & 3 way	54
5930	54

Accessories

Acce.	53
-------	----

Actuator

Vaurien I / II	54
Vaurien M	54

Air Vent

9380N	55
9390N	55

Digital Manometer

T650RWV	55
---------	----

5044AB LF Brass Full Port Ball Valve



- * 150# WSP
- * 600# WOG
- * DZR Lead Free Brass Body
- * Threaded Ends
- * Chrome-plated Ball, Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * 500 PSI (1-1/4", 2") for UL use
- * CSA 1/2, 5 & 125 PSI (1/4" - 2")
- * FM (1/2" - 2"), UL (1/4" - 2")
- * Vacuum rating: 29 in-Hg
- * AB1953, NSF/ANSI 61 & 372

UPC Code	Size	Inner pcs.	Pcs./carton	Indiv. Wt. (lbs.)	Wt./Carton
6 70779 70327 5	1/4	-	80	0.34	30
6 70779 45403 0	3/8	-	80	0.32	27
6 70779 45404 7	1/2	-	80	0.58	49
6 70779 45405 4	3/4	-	60	0.86	54
6 70779 45406 1	1	-	35	1.34	50
6 70779 45407 8	1-1/4	-	20	2.14	47
6 70779 45408 5	1-1/2	-	15	3.12	51
6 70779 45420 7	2	-	10	4.82	52
6 70779 70328 2	2-1/2	-	6	9.78	62
6 70779 70329 9	3	-	4	13.92	59
6 60779 70330 5	4	-	2	20.40	42

5049AB LF Brass Full Port Ball Valve



- * 150# WSP
- * 600# WOG
- * DZR Lead Free Brass Body
- * Solder Ends
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * Vacuum rating: 29 in-Hg
- * AB1953, NSF/ANSI 61 & 372

6 70779 45104 6	1/2	-	80	0.58	49
6 70779 45105 3	3/4	-	60	0.80	51
6 70779 45106 0	1	-	45	1.24	57
6 70779 45107 7	1-1/4	-	30	2.04	64
6 70779 45108 4	1-1/2	-	15	3.20	48
6 70779 45120 6	2	-	10	4.74	49
6 70779 70331 2	2-1/2	-	6	9.00	56
6 70779 70332 9	3	-	4	13.46	57

5544AB LF Brass Full Port Ball Valve



- * 150# WSP / 600# WOG
- * Lead Free Brass Body
- * Threaded Ends
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * CSA 1/2 & 5 PSI (1/4" - 3")
- * CSA ΔC (1/4" - 2")
- * MSS-SP-110
- * FM, UL (1/4" - 2")
- * AB1953, NSF/ANSI 61 & 372

6 70779 45002 5	1/4	-	80	0.30	27
6 70779 45003 2	3/8	-	80	0.28	24
6 70779 45004 9	1/2	-	80	0.50	42
6 70779 45005 6	3/4	-	60	0.72	45
6 70779 45006 3	1	-	45	1.16	55
6 70779 45007 0	1-1/4	-	30	1.74	56
6 70779 45008 7	1-1/2	-	15	2.64	43
6 70779 45020 9	2	-	10	3.94	43
6 70779 45025 4	2-1/2	-	6	8.16	52
6 70779 45030 8	3	-	4	10.94	47
6 70779 45040 7	4	-	4	16.32	70

5549AB LF Brass Full Port Ball Valve



- * 150# WSP
- * 600# WOG
- * Lead Free Brass Body
- * Solder Ends
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * AB1953, NSF/ANSI 61 & 372

6 70779 44904 3	1/2	-	80	0.46	39
6 70779 44905 0	3/4	-	60	0.64	41
6 70779 44906 7	1	-	45	1.00	48
6 70779 44907 4	1-1/4	-	30	1.54	49
6 70779 44908 1	1-1/2	-	24	2.30	59
6 70779 44920 3	2	-	15	3.52	56
6 70779 44925 8	2-1/2	-	6	7.40	47
6 70779 44930 2	3	-	4	10.46	45
6 70779 44940 1	4	-	2	16.76	36
6 70779 45030 8	3	-	4	10.94	47
6 70779 45040 7	4	-	4	16.32	70

5592AB LF Brass Full Port Ball Valve



- * 150# WSP / 600# WOG
- * Lead Free Brass Body
- * Threaded Ends
- * Chrome-Plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * CSA 1/2, 5 & 125 PSI (1/4" - 2")
- * CSA ΔC (1/4" - 2")
- * CSA 1/2 PSI (2 1/2" - 3")
- * UL (1/4" - 2")
- * AB1953, NSF/ANSI 61 & 372

6 70779 70959 8	1/4	-	80	0.26	24
6 70779 70960 4	3/8	-	80	0.28	24
6 70779 42004 2	1/2	-	80	0.40	36
6 70779 42005 9	3/4	-	60	0.56	37
6 70779 42006 6	1	-	45	0.98	47
6 70779 42007 3	1-1/4	-	30	1.34	44
6 70779 42008 0	1-1/2	-	24	1.88	48
6 70779 42020 2	2	-	15	2.96	47
6 70779 70944 4	2-1/2	-	6	6.08	39
6 70779 70945 1	3	-	4	8.94	38
6 70779 70946 8	4	-	4	12.82	54

5595AB LF Brass Full Port Ball Valve



- * 150# WSP / 600# WOG
- * Lead Free Brass Body
- * Solder Ends
- * Chrome-Plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * AB1953, NSF/ANSI 61 & 372

6 70779 41904 6	1/2	-	80	0.38	33
6 70779 41905 3	3/4	-	60	0.52	35
6 70779 41906 0	1	-	45	0.90	44
6 70779 41907 7	1-1/4	-	30	1.20	39
6 70779 41908 4	1-1/2	-	24	1.74	45
6 70779 41920 6	2	-	15	2.84	46
6 70779 70944 4	2-1/2	-	6	5.46	36
6 70779 70945 1	3	-	4	8.50	37

5592ABW / 5592ABWNS / 5595ABW


CSA=5592ABW & 5592ABWNS only



- * 150# WSP / 600# WOG
- * Lead Free Brass Body
- * Chrome-Plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * CSA ½, 5 & 125 PSI
- * CSA ΔC
- * UL (5592ABW)
- * AB1953, NSF/ANSI 61 & 372

5592ABW = Threaded Ends
 5592ABWNS = Threaded Ends
 S.S. Wing handle & Nut
 5595ABW = Solder Ends

5060AB / 5063AB Full Port Ball Valve w/ Drain


- * 600# WOG
- * Lead Free Brass Body
- * Drain Port
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * AB1953, NSF/ANSI 61 & 372

5060AB = Threaded Ends
 5063AB = Solder Ends

5065AB LF Brass Full Port Ball Valve


- * 600# WOG
- * Lead Free Brass Body
- * Compression Ends
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Blow-Out Proof Stem
- * O-ring Packing
- * AB1953, NSF/ANSI 61 & 372

5586AB LF Brass Full Port Hose End Ball Valve


- * 150# WSP / 600# WOG
- * Lead Free Brass Body
- * FNPT x Hose Ends
- * Drain Cap with Chain
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * AB1953, NSF/ANSI 61 & 372

5081/82/83/84AB LF Brass Mini Ball Valve


5081AB
 5082AB
 5083AB

5084AB



- * 150# WSP
- * 600# WOG
- * FNPT x MNPT
- * FNPT x FNPT (5084AB)
- * Full Port Forged Brass
- * Virgin PTFE Seats
- * Chrome Plated Ball
- * FPM O-ring Packing
- * Blow-Out Proof Stem
- * ANSI Z21.15/CGA-9.1
- * AB1953, NSF/ANSI 61 & 372

UPC Code Size Inner pcs. Pcs./ carton Indiv. Wt. (lbs.) Wt./ Carton

5592ABW

6 70779 70530 9	1/2	-	80	0.38	33
6 70779 70531 6	3/4	-	60	0.54	35
6 70779 70532 3	1	-	45	0.96	45

5592ABWNS

6 70779 71632 9	1/2	-	80	0.38	33
6 70779 71633 6	3/4	-	60	0.54	35
6 70779 71634 3	1	-	45	0.96	45

5595ABW

6 70779 70533 0	1/2	-	80	0.34	30
6 70779 70534 7	3/4	-	60	0.50	32
6 70779 70535 4	1	-	45	0.88	43

5060AB

6 70779 41804 9	1/2	-	80	0.60	50
6 70779 41805 6	3/4	-	60	0.83	52
6 70779 41806 3	1	-	45	1.27	59

5063AB

6 70779 41704 2	1/2	-	80	0.42	36
6 70779 41705 9	3/4	-	60	0.60	38
6 70779 41706 6	1	-	45	1.00	47

6 70779 43204 5	1/2	-	80	0.60	48
6 70779 43205 2	3/4	-	60	0.82	49
6 70779 43206 9	1	-	45	1.28	58

6 70779 71631 2	3/4	-	60	0.64	40
-----------------	-----	---	----	------	----

5081AB (1/8F x 1/8M)

6 70779 43001 0	1/8 x 1/8	-	80	0.18	16
-----------------	-----------	---	----	------	----

5082AB (1/4F x 1/8M)

6 70779 42902 1	1/4 x 1/8	-	80	0.16	14
-----------------	-----------	---	----	------	----

5083AB (1/4F x 1/4M)

6 70779 43301 1	1/4 x 1/4	-	80	0.18	15
-----------------	-----------	---	----	------	----

5084AB (1/4F x 1/4F)

6 70779 42802 4	1/4 x 1/4	-	80	0.16	14
-----------------	-----------	---	----	------	----

2417AB / 2419AB LF Brass Pump Flange Ball Valve



- * 600# WOG
- * 3-Piece Lead Free Brass Construction
- * Rotating Flange Design
- * FNPT X Flange
- * Full Port
- * 1/4 Turn Ball Valve Design
- * Includes Bolt kit
- * Includes Wing handle
- * AB1953, NSF/ANSI 61 & 372

2417AB = FNPT x Flange
2419AB = Solder x Flange

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
2417AB					
6 70779 70022 9	3/4	-	24	1.44	37
6 70779 70023 6	1	-	18	1.84	36
6 70779 70024 3	1-1/4	-	12	2.18	42
6 70779 70025 0	1-1/2	-	12	2.64	34
6 70779 70026 7	2	-	8	4.00	34

2419AB

6 70779 70032 8	3/4	-	24	1.42	37
6 70779 70033 5	1	-	18	1.80	35
6 70779 70034 2	1-1/4	-	18	2.10	40
6 70779 70035 9	1-1/2	-	12	2.60	34
6 70779 70036 6	2	-	8	3.84	33

1500AB / 1515AB PP-R80 Ball Valve



- * 300# WOG
- * PP-R80 Body
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Blow-Out Proof Stem
- * O-ring Packing
- * AB1953 & NSF/ANSI 372
- * NSF/ANSI 14
- * 10-year Warranty
- * IAPMO/ANSI Z1157

1500AB = Polyfusion Ends
1515AB = Polyfusion x PEX (F1960)

1500AB

6 70779 70951 2	1/2	-	40	0.30	14
6 70779 70952 9	3/4	-	35	0.32	13
6 70779 70953 6	1	-	25	0.46	13
6 70779 70954 3	1-1/4	-	15	0.80	13
6 70779 70955 0	1-1/2	-	5	1.14	7
6 70779 70956 7	2	-	5	2.06	12

1515AB

6 70779 71034 1	1/2	-	30	0.40	13
6 70779 71035 8	3/4	-	25	0.48	13
6 70779 71036 5	1	-	20	0.70	15

Accessories: See pg. 19



1501AB / 1516AB PP-RCT Ball Valve



- * 300# WOG
- * PP-RCT Body
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Blow-Out Proof Stem
- * O-ring Packing
- * AB1953 & NSF/ANSI 372
- * NSF/ANSI 14
- * 10-year Warranty
- * IAPMO/ANSI Z1157

1501AB = Polyfusion Ends
1516AB = Polyfusion x PEX (F1960)

1501AB

6 70779 71292 5	1/2	-	40	0.25	14
6 70779 71293 2	3/4	-	35	0.33	13
6 70779 71294 9	1	-	25	0.42	13
6 70779 71295 6	1-1/4	-	15	0.77	13
6 70779 71296 3	1-1/2	-	5	1.12	7
6 70779 71297 0	2	-	5	2.06	12
6 70779 71639 8	2-1/2	-	4	3.10	14
6 70779 71655 8	3	-	2	4.80	11

1516AB

6 70779 71299 4	1/2	-	30	0.40	13
6 70779 71300 7	3/4	-	25	0.48	13
6 70779 71301 4	1	-	20	0.70	15

Accessories: See pg. 19



1501PAB / 1516PAB PP-RCT Ball Valve



- * 300# WOG
- * PP-RCT Body
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Blow-Out Proof Stem
- * O-ring Packing
- * AB1953 & NSF/ANSI 372
- * NSF/ANSI 14
- * 10-year Warranty
- * IAPMO/ANSI Z1157

1501PAB = Polyfusion Ends
1516PAB = Polyfusion x PEX (F1960)

1501PAB

6 70779 71292 5	1/2	-	40	0.25	14
6 70779 71293 2	3/4	-	35	0.33	13
6 70779 71294 9	1	-	25	0.42	13
6 70779 71295 6	1-1/4	-	15	0.77	13
6 70779 71296 3	1-1/2	-	5	1.12	7
6 70779 71297 0	2	-	5	2.06	12
6 70779 71639 8	2-1/2	-	4	3.10	14
6 70779 71655 8	3	-	2	4.80	11

1516PAB

6 70779 71299 4	1/2	-	30	0.40	13
6 70779 71300 7	3/4	-	25	0.48	13
6 70779 71301 4	1	-	20	0.70	15

Accessories: See pg. 19



5070AB EzGRIP LF Brass Ball Valve


- * 200# WOG
- * Lead Free Brass Body
- * Full Port
- * EzGRIP Push-Fit Ends
- * Adjustable Packing
- * Blow-Out Proof Stem
- * Works with Copper, CPVC and PEX tubing
- * Field Adjustable/Removable
- * AB1953, NSF/ANSI 61 & 372

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 43104 8	1/2	-	80	0.48	41
6 70779 43105 5	3/4	-	60	0.68	44
6 70779 43106 2	1	-	45	1.12	54



See pg. 19 for Disassembly Tool

Disassembly Tool

5020AB / ABD / ABX LF Brass Crimp Full Port Ball Valve


- * 600# WOG Body
- * DZR Lead Free Brass Body
- * Dual EzPress Ends
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * 250 PSI max. end connections
- * AB1953, NSF/ANSI 61 & 372

5020ABD = with Drain

5020ABX = 200# WOG Body
200 PSI end connections

5020AB

6 70779 43904 4	1/2	-	50	0.48	26
6 70779 43905 1	3/4	-	50	0.70	37
6 70779 43906 8	1	-	40	1.26	54
6 70779 43907 5	1-1/4	-	35	1.64	60
6 70779 43908 2	1-1/2	-	20	2.54	54
6 70779 43920 4	2	-	12	3.74	48

5020ABD

6 70779 72339 6	1/2	-	50	0.55	29
6 70779 72340 2	3/4	-	40	0.79	33
6 70779 72341 9	1	-	35	1.18	43

5020ABX (XLC configuration)

6 70779 70324 4	2-1/2	-	4	8.62	37
6 70779 70325 1	3	-	2	11.84	26
6 70779 70326 8	4	-	1	17.58	20

5020ABS LF Brass Crimp Full Port Ball Valve


- * 600# WOG Body
- * DZR Lead Free Brass Body
- * Dual EzPress Ends
- * SS316 Ball & Stem
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * 250 PSI max. end connections
- * AB1953, NSF/ANSI 61 & 372

6 70779 70836 2	1/2	-	50	0.56	30
6 70779 70837 9	3/4	-	50	0.82	44
6 70779 70838 6	1	-	50	1.22	53

5026AB LF Brass Full Port Crimp Hose End Ball Valve


- * 600# WOG Body
- * DZR Lead Free Brass Body
- * EzPress x Hose End
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * Drain cap with chain
- * MSS-SP-110
- * 250 PSI max. end connections
- * AB1953, NSF/ANSI 61 & 372

6 70779 72565 9	1/2	-	50	0.48	25
6 70779 72564 2	3/4	-	50	0.70	26

5520AB / ABX LF Brass Crimp Full Port Ball Valve


- * 250# WOG Body
- * DZR Lead Free Brass Body
- * Dual EzPress Ends
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Double O-ring Packing
- * Blow-Out Proof Stem
- * MSS-SP-110
- * 250 PSI max. end connections
- * AB1953, NSF/ANSI 61 & 372

5520ABX = 200# WOG Body
200 PSI end connections

5520AB

6 70779 71468 4	1/2	-	50	0.40	22
6 70779 71469 1	3/4	-	50	0.51	28
6 70779 71470 7	1	-	40	0.91	38
6 70779 71471 4	1-1/4	-	35	1.28	47
6 70779 71472 1	1-1/2	-	20	1.95	41
6 70779 71473 8	2	-	12	2.93	38

5520ABX (XLC configuration)

6 70779 71474 5	2-1/2	-	4	6.80	29
6 70779 71475 2	3	-	2	10.38	23
6 70779 71476 9	4	-	1	16.78	19

5004AB / ABW PEX (F1807) Transition Ball Valve



- * 400# WOG
- * DZR Lead Free Brass Body
- * Regular port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1807) x EzPress
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14, ASTM-F1807
- * AB1953, NSF/ANSI 61 & 372

5006AB / ABW PEX (F1807) Transition Ball Valve



- * 400# WOG
- * DZR Lead Free Brass Body
- * Regular port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1807) x MNPT
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14, ASTM-F1807
- * AB1953, NSF/ANSI 61 & 372

5007AB / ABW PEX (F1807) Transition Ball Valve




- * 400# WOG
- * DZR Lead Free Brass Body
- * Regular port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1807) x Solder
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14, ASTM-F1807
- * AB1953, NSF/ANSI 61 & 372

5008AB / ABW PEX (F1807) Transition Ball Valve



- * 400# WOG
- * DZR Lead Free Brass Body
- * Regular port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1807) x FNPT
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14, ASTM-F1807
- * AB1953, NSF/ANSI 61 & 372

5009AB / ABD / ABF / ABW / ABDF PEX (F1807) Ball Valve

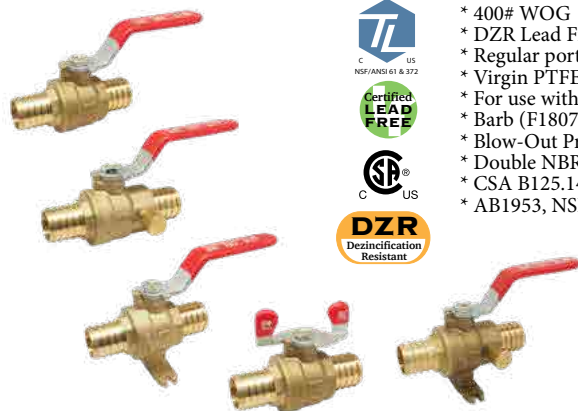

- * 400# WOG
- * DZR Lead Free Brass Body
- * Regular port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1807) x Barb (F1807)
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14, ASTM-F1807
- * AB1953, NSF/ANSI 61 & 372

Accessories: See pg. 19

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
5004AB					
6 70779 72128 6	1/2	-	80	0.27	25
6 70779 72129 3	3/4	-	60	0.42	28
6 70779 72130 9	1	-	45	0.61	32
5004ABW					
6 70779 72131 6	1/2	-	80	0.24	23
6 70779 72132 3	3/4	-	60	0.39	26
6 70779 72133 0	1	-	45	0.57	30
5006AB					
6 70779 71167 6	1/2	-	80	0.28	25
6 70779 71168 3	3/4	-	60	0.42	28
6 70779 71169 0	1	-	45	0.64	32
5006ABW					
6 70779 71170 6	1/2	-	80	0.26	23
6 70779 71171 3	3/4	-	60	0.38	26
6 70779 71172 0	1	-	45	0.62	30
5007AB					
6 70779 71106 5	1/2	-	80	0.24	22
6 70779 71107 2	3/4	-	60	0.40	26
6 70779 71108 9	1	-	45	0.56	27
5007ABW					
6 70779 71450 9	1/2	-	80	0.22	20
6 70779 71451 6	3/4	-	60	0.36	24
6 70779 71452 3	1	-	45	0.50	25
5008AB					
6 70779 70967 3	1/2	-	80	0.28	24
6 70779 70968 0	3/4	-	60	0.42	27
6 70779 70969 7	1	-	45	0.58	28
5008ABW					
6 70779 70996 3	1/2	-	80	0.24	22
6 70779 70997 0	3/4	-	60	0.38	25
6 70779 70998 7	1	-	45	0.56	27
5009AB					
6 70779 70232 2	1/2	-	80	0.24	21
6 70779 70233 9	3/4	-	60	0.36	24
6 70779 70234 6	1	-	45	0.52	25
5009ABD					
6 70779 70985 7	1/2	-	80	0.28	26
6 70779 70986 4	3/4	-	60	0.42	28
6 70779 70987 1	1	-	45	0.60	29
5009ABF					
6 70779 70979 6	1/2	-	80	0.32	27
6 70779 70980 2	3/4	-	60	0.46	29
6 70779 70981 9	1	-	45	0.60	29
5009ABW					
6 70779 70839 3	1/2	-	80	0.22	19
6 70779 70840 9	3/4	-	60	0.34	22
6 70779 70841 6	1	-	40	0.48	23
5009ABDF					
6 70779 72193 4	1/2	-	80	0.37	31
6 70779 72194 1	3/4	-	60	0.50	32
6 70779 92195 8	1	-	40	0.71	30

5014AB / ABW PEX (F1960) Transition Ball Valve


- * 400# WOG
- * DZR Lead Free Brass Body
- * Full port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1960) x EzPress
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14, ASTM-F1960
- * AB1953, NSF/ANSI 61 & 372

5015AB / ABD / ABF / ABW / ABDF PEX (F1960) Ball Valve


- * 400# WOG
- * DZR Lead Free Brass Body
- * Full port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1960) x Barb (F1960)
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14, ASTM-F1960
- * AB1953, NSF/ANSI 61 & 372

Accessories: See pg. 19

5016AB / ABW PEX (F1960) Transition Ball Valve


- * 400# WOG
- * DZR Lead Free Brass Body
- * Full port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1960) x FNPT
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14, ASTM-F1960
- * AB1953, NSF/ANSI 61 & 372

5017AB / ABW PEX (F1960) Transition Ball Valve


- * 400# WOG
- * DZR Lead Free Brass Body
- * Full port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1960) x Solder
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14
- * ASTM-F1960
- * AB1953, NSF/ANSI 61 & 372

5018AB / ABW PEX (F1960) Transition Ball Valve


- * 400# WOG
- * DZR Lead Free Brass Body
- * Full port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1960) x MNPT
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14, ASTM-F1960
- * AB1953, NSF/ANSI 61 & 372

UPC Code Size Inner pcs. Pcs./ carton Indiv. Wt. (lbs.) Wt./ Carton

5014AB

6 70779 72122 4	1/2	-	80	0.26	23
6 70779 72123 1	3/4	-	60	0.49	31
6 70779 72124 8	1	-	45	0.75	36

5014ABW

6 70779 72125 5	1/2	-	80	0.23	20
6 70779 72126 2	3/4	-	60	0.45	29
6 70779 72127 9	1	-	45	0.72	34

5015AB

6 70779 70312 1	1/2	-	80	0.28	23
6 70779 70313 8	5/8	-	60	0.43	28
6 70779 70314 5	3/4	-	60	0.44	28
6 70779 70315 2	1	-	45	0.68	32
6 70779 70316 9	1-1/4	-	30	1.16	37
6 70779 70317 6	1-1/2	-	24	1.62	41
6 70779 70318 3	2	-	15	2.78	44
6 70779 71157 7	2-1/2	-	8	5.08	42
6 70779 71158 4	3	-	4	8.92	38

5015ABD

6 70779 70982 6	1/2	-	80	0.32	27
6 70779 70983 3	3/4	-	60	0.50	32
6 70779 70984 0	1	-	45	0.72	34

5015ABF

6 70779 71111 9	1/2	-	80	0.36	30
6 70779 71112 6	3/4	-	60	0.52	34
6 70779 71113 3	1	-	45	0.74	36

5015ABW

6 70779 71002 0	1/2	-	80	0.24	21
6 70779 71003 7	3/4	-	60	0.42	26
6 70779 71004 4	1	-	45	0.62	29

5015ABDF

6 70779 71102 7	1/2	-	80	0.40	34
6 70779 71103 4	3/4	-	60	0.60	37
6 70779 71104 1	1	-	45	0.82	38

5016AB

6 70779 70973 4	1/2	-	80	0.28	26
6 70779 70974 1	3/4	-	60	0.46	29
6 70779 70975 8	1	-	45	0.64	32

5016ABW

6 70779 71008 2	1/2	-	80	0.26	21
6 70779 71009 9	3/4	-	60	0.41	25
6 70779 71010 5	1	-	45	0.62	28

5017AB

6 70779 70976 5	1/2	-	80	0.26	22
6 70779 70977 2	3/4	-	60	0.44	28
6 70779 70978 9	1	-	45	0.60	29

5017ABW

6 70779 71011 2	1/2	-	80	0.22	20
6 70779 71012 9	3/4	-	60	0.40	26
6 70779 71013 6	1	-	45	0.58	29

5018AB

6 70779 70970 3	1/2	-	80	0.30	26
6 70779 70971 0	3/4	-	60	0.46	29
6 70779 70972 7	1	-	45	0.72	34

5018ABW

6 70779 71014 3	1/2	-	80	0.28	24
6 70779 71015 0	3/4	-	60	0.42	28
6 70779 71016 7	1	-	45	0.62	28

5019AB PEX (F1960) x Flange Ball Valve



- * 400# WOG
- * DZR Lead Free Brass Body
- * Regular port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1960) x Flange
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14, ASTM-F1960
- * AB1953, NSF/ANSI 61 & 372

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 71159 1	2-1/2	-	3	11.84	36
6 70779 71160 7	3	-	3	16.08	50

RW-316AB PEX (F1807) Ball Valve Hose Bibb



- * 125# CWP
- * Lead Free Brass Body
- * Virgin PTFE Seats
- * Barb (F1807) x Hose
- * No Kink Spout
- * Double NBR O-Ring Packing
- * AB1953, NSF/ANSI 61 & 372

6 70779 71203 1	1/2	-	80	0.46	33
6 70779 71204 8	3/4	-	60	0.54	26

RW-516AB PEX (F1807) Ball Valve Hose Bibb



- * 125# CWP
- * Lead Free Brass Body
- * Virgin PTFE Seats
- * Barb (F1807) x Hose
- * No Kink Spout
- * Double NBR O-Ring Packing
- * AB1953, NSF/ANSI 61 & 372

6 70779 71205 5	1/2	-	80	0.23	13
6 70779 71206 2	3/4	-	60	0.26	15

Various options available for all 3 different PEX styles



PEX F1807



PEX F1960



EVERLOC+®

<https://redwhitevalvecorp.com/guide-to-pex-valves/>

5415AB / ABD / ABW PEX (EVERLOC+[®]) Ball Valve


- * 400# WOG
- * DZR Lead Free Brass Body
- * Full port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (Everloc+) x Barb (Everloc+)
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14
- * AB1953, NSF/ANSI 61 & 372

Accessories: See pg. 19

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
5415AB					
6 70779 71810 1	1/2	-	80	0.30	26
6 70779 71811 8	3/4	-	60	0.56	35
6 70779 71812 5	1	-	45	0.87	41
6 70779 71813 2	1-1/4	-	30	1.30	41
6 70779 71814 9	1-1/2	-	20	1.83	46
6 70779 71815 6	2	-	15	3.29	52

5415ABD

6 70779 72116 3	1/2	-	80	0.36	31
6 70779 72117 0	3/4	-	60	0.62	39
6 70779 72118 7	1	-	45	0.93	43

5415ABW

6 70779 71816 3	1/2	-	80	0.28	24
6 70779 71817 0	3/4	-	60	0.52	33
6 70779 71818 7	1	-	45	0.82	39
6 70779 71819 4	1-1/4	-	30	1.26	40
6 70779 71820 0	1-1/2	-	20	1.82	45
6 70779 71821 7	2	-	15	3.29	51

5415ABDW

6 70779 72119 4	1/2	-	80	0.33	28
6 70779 72120 0	3/4	-	60	0.58	36
6 70779 72121 7	1	-	45	0.90	42

5414AB / 5414ABW PEX (EVERLOC+[®]) Transition Ball Valve


- * 400# WOG
- * DZR Lead Free Brass Body
- * Full port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (Everloc+) x EzPress
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14
- * AB1953, NSF/ANSI 61 & 372

5414AB

6 70779 72134 7	1/2	-	80	0.27	23
6 70779 72135 4	3/4	-	60	0.51	32
6 70779 72136 1	1	-	45	0.79	37

5414ABW

6 70779 72137 8	1/2	-	80	0.24	20
6 70779 72138 5	3/4	-	60	0.47	30
6 70779 72139 2	1	-	45	0.75	35

5416AB / 5416ABW PEX (EVERLOC+[®]) Transition Ball Valve


- * 400# WOG
- * DZR Lead Free Brass Body
- * Full port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (Everloc+) x FNPT
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14
- * AB1953, NSF/ANSI 61 & 372

5416AB

6 70779 72140 8	1/2	-	80	0.31	26
6 70779 72141 5	3/4	-	60	0.55	33
6 70779 72142 2	1	-	45	0.79	37

5416ABW

6 70779 72143 9	1/2	-	80	0.27	23
6 70779 72144 6	3/4	-	60	0.49	31
6 70779 72145 3	1	-	45	0.75	35

5417AB / 5417ABW PEX (EVERLOC+[®]) Transition Ball Valve


- * 400# WOG
- * DZR Lead Free Brass Body
- * Full port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (Everloc+) x Solder
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14
- * AB1953, NSF/ANSI 61 & 372

5417AB

6 70779 72146 0	1/2	-	80	0.28	24
6 70779 72147 7	3/4	-	60	0.50	31
6 70779 72148 4	1	-	45	0.74	35

5417ABW

6 70779 72149 1	1/2	-	80	0.22	19
6 70779 72150 7	3/4	-	60	0.46	29
6 70779 72151 4	1	-	45	0.70	33

5418AB / 5418ABW PEX (EVERLOC+[®]) Transition Ball Valve


- * 400# WOG
- * DZR Lead Free Brass Body
- * Full port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (Everloc+) x MNPT
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14
- * AB1953, NSF/ANSI 61 & 372

5418AB

6 70779 72152 1	1/2	-	80	0.32	27
6 70779 72153 8	3/4	-	60	0.54	34
6 70779 72154 5	1	-	45	0.86	40

5418ABW

6 70779 72155 2	1/2	-	80	0.28	24
6 70779 72156 9	3/4	-	60	0.50	31
6 70779 72157 6	1	-	45	0.83	39

3400AB LF Tankless Water Heater Valve Kit



- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * FNPT x Solder
- * Integral base drain
- * Purge Port w/Cap
- * Integral relief valve
- RAB: 200K BTU/HR relief
- SAB: 500K BTU/HR relief
- TAB: 2.7M BTU/HR relief
- * AB1953, NSF/ANSI 61 & 372

* Kit includes (1) Hot Valve, (1) Cold Valve and (1) Pressure Relief Valve

3420AB LF Tankless Water Heater Valve Kit



- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * FNPT x FNPT
- * Integral base drain
- * Purge Port w/Cap
- * Integral relief valve
- RAB: 200K BTU/HR relief
- SAB: 500K BTU/HR relief
- TAB: 2.7M BTU/HR relief
- * AB1953, NSF/ANSI 61 & 372

* Kit includes (1) Hot Valve, (1) Cold Valve and (1) Pressure Relief Valve

3430AB LF EzPress Tankless Water Heater Valve Kit



- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * FNPT x EzPress
- * Integral base drain
- * Purge Port w/Cap
- * Integral relief valve
- RAB: 200K BTU/HR relief
- SAB: 500K BTU/HR relief
- TAB: 2.7M BTU/HR relief
- * AB1953, NSF/ANSI 61 & 372

* Kit includes (1) Hot Valve, (1) Cold Valve and (1) Pressure Relief Valve

35*R Tankless Contractor Kits w/ GAS Accessories



- Kit includes:
- (1) 3400RAB, 3420RAB or 3430RAB Kit
 - (1) Gas Valve
 - 600# WOG
 - Threaded Ends
 - CSA certified 1/2psig
 - (1) Flexible Gas Connector
 - 1" O.D. (3/4" I.D.) Tube size
 - Yellow polymer coated S.S.
 - 3/4" MIP x 3/4" FIP
 - CSA certified indoor/outdoor use
 - 12", 18" or 24"

UPC Code Size Inner pcs. Pcs./ carton Indiv. Wt. (lbs.) Wt./ Carton

3400RAB Kit

6 70779 32605 4	3/4	-	9	4.04	39
6 70779 72235 1	1	-	5	4.60	26

3400SAB Kit

6 70779 72283 2	3/4	-	9	4.04	39
6 70779 72238 2	1	-	5	4.60	26

3400TAB Kit

6 70779 32405 0	3/4	-	9	4.84	46
6 70779 32406 7	1	-	5	5.18	28

3420RAB Kit

6 70779 32205 6	3/4	-	9	4.02	39
6 70779 72236 8	1	-	5	4.65	26

3420SAB Kit

6 70779 72284 9	3/4	-	9	4.02	39
6 70779 72239 9	1	-	5	4.65	26

3420TAB Kit

6 70779 32105 9	3/4	-	9	4.82	46
6 70779 32106 6	1	-	5	5.24	29

3430RAB Kit

6 70779 71639 8	3/4	-	9	4.04	39
6 70779 72237 5	1	-	5	4.70	26

3430SAB Kit

6 70779 72285 6	3/4	-	9	4.04	39
6 70779 72240 5	1	-	5	4.70	26

3430TAB Kit

6 70779 72049 4	3/4	-	9	4.80	45
6 70779 72282 5	1	-	5	5.40	46

350R2-12 (Solder)

6 70779 71302 1	12"	-	-	6.28	-
-----------------	-----	---	---	------	---

350R2-18 (Solder)

6 70779 71272 7	18"	-	-	6.39	-
-----------------	-----	---	---	------	---

350R2-24 (Solder)

6 70779 71273 4	24"	-	-	6.48	-
-----------------	-----	---	---	------	---

352R2-12 (FNPT)

6 70779 71303 8	12"	-	-	6.25	-
-----------------	-----	---	---	------	---

352R2-18 (FNPT)

6 70779 71274 1	18"	-	-	6.35	-
-----------------	-----	---	---	------	---

352R2-24 (FNPT)

6 70779 71275 8	24"	-	-	6.45	-
-----------------	-----	---	---	------	---

353R2-12 (EzPress)

6 70779 72279 5	12"	-	-	6.42	-
-----------------	-----	---	---	------	---

353R2-18 (EzPress)

6 70779 72280 1	18"	-	-	6.52	-
-----------------	-----	---	---	------	---

353R2-24 (EzPress)

6 70779 72281 8	24"	-	-	6.62	-
-----------------	-----	---	---	------	---

3400LAB LF Tankless Water Heater Valve Kit


- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * FNPT x Solder
- * Integral base drain
- * Purge Port w/Cap
- * Integral relief valve
- LRAB: 200K BTU/HR relief
- LSAB: 500K BTU/HR relief
- LTAB: 2.7M BTU/HR relief
- * AB1953, NSF/ANSI 61 & 372

* Kit includes (1) Hot Valve, (1) Cold Valve and (1) Pressure Relief Valve

3420LAB LF Tankless Water Heater Valve Kit


- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * FNPT x FNPT
- * Integral base drain
- * Purge Port w/Cap
- * Integral relief valve
- LRAB: 200K BTU/HR relief
- LSAB: 500K BTU/HR relief
- LTAB: 2.7M BTU/HR relief
- * AB1953, NSF/ANSI 61 & 372

* Kit includes (1) Hot Valve, (1) Cold Valve and (1) Pressure Relief Valve

3430LAB LF EzPress Tankless Water Heater Valve Kit


- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * FNPT x EzPress
- * Integral base drain
- * Purge Port w/Cap
- * Integral relief valve
- LRAB: 200K BTU/HR relief
- LSAB: 500K BTU/HR relief
- LTAB: 2.7M BTU/HR relief
- * AB1953, NSF/ANSI 61 & 372

* Kit includes (1) Hot Valve, (1) Cold Valve and (1) Pressure Relief Valve

3300AB LF Water Heater Isolation Valve Kit


- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * FNPT x Solder
- * AB1953, NSF/ANSI 61 & 372

* Kit includes (1) Hot Valve and (1) Cold Valve

3320AB LF Water Heater Isolation Valve Kit


- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * FNPT x FNPT
- * AB1953, NSF/ANSI 61 & 372

* Kit includes (1) Hot Valve and (1) Cold Valve

3330AB LF EzPress Water Heater Isolation Valve Kit


- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * FNPT x EzPress
- * AB1953, NSF/ANSI 61 & 372

* Kit includes (1) Hot Valve and (1) Cold Valve

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
3400LRAB Kit					
6 70779 72298 6	3/4	-	9	3.63	35
3400LSAB Kit					
6 70779 72301 3	3/4	-	9	3.62	35
3400LTAB Kit					
6 70779 72304 4	3/4	-	9	4.29	41
3420LRAB Kit					
6 70779 72299 3	3/4	-	9	3.64	35
3420LSAB Kit					
6 70779 72302 0	3/4	-	9	3.64	35
3420LTAB Kit					
6 70779 72305 1	3/4	-	9	4.31	41
3430LRAB Kit					
6 70779 72300 6	3/4	-	9	3.72	36
3430LSAB Kit					
6 70779 72303 7	3/4	-	9	3.72	36
3430LTAB Kit					
6 70779 72306 8	3/4	-	9	4.39	42
3300AB LF Water Heater Isolation Valve Kit					
6 70779 72217 7	3/4	-	24	3.79	40
3320AB LF Water Heater Isolation Valve Kit					
6 70779 72220 7	3/4	-	24	3.85	40
3330AB LF EzPress Water Heater Isolation Valve Kit					
6 70779 72223 8	3/4	-	24	3.84	40

3401AB LF Tankless Water Heater Valve (Hot)



- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * Integral base drain
- * Purge Port w/Cap
- * AB1953, NSF/ANSI 61 & 372
- * FNPT x Solder

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 31005 3	3/4	-	25	1.74	
6 70779 31006 0	1	-	20	1.89	

3402AB LF Tankless Water Heater Valve (Cold)



- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * Integral base drain
- * Purge Port w/Cap
- * AB1953, NSF/ANSI 61 & 372
- * FNPT x Solder

6 70779 30905 7	3/4	-	25	1.64
6 70779 30906 4	1	-	20	1.77

3421AB LF Tankless Water Heater Valve (Hot)



- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * Integral base drain
- * Purge Port w/Cap
- * AB1953, NSF/ANSI 61 & 372
- * FNPT x FNPT

6 70779 30605 6	3/4	-	25	1.71
6 70779 30606 3	1	-	20	1.92

3422AB LF Tankless Water Heater Valve (Cold)



- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * Integral base drain
- * Purge Port w/Cap
- * AB1953, NSF/ANSI 61 & 372
- * FNPT x FNPT

6 70779 30405 2	3/4	-	25	1.60
6 70779 30406 9	1	-	20	1.80

3431AB LF EzPress Tankless Water Heater Valve (Hot)



- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * Integral base drain
- * Purge Port w/Cap
- * FNPT x EzPress
- * AB1953, NSF/ANSI 61 & 372

6 70779 71640 4	3/4	-	25	1.80
6 70779 72277 1	1	-	20	1.93

3432AB LF EzPress Tankless Water Heater Valve (Cold)



- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * Integral base drain
- * Purge Port w/Cap
- * FNPT x EzPress
- * AB1953, NSF/ANSI 61 & 372

6 70779 71641 1	3/4	-	25	1.68
6 70779 72278 8	1	-	20	1.80

3401LAB LF Tankless Water Heater Valve (Hot)



- * 600# WOG
- * Full Port
- * Virgin PTFE Seats
- * Integral base drain
- * Purge Port w/Cap
- * AB1953, NSF/ANSI 61 & 372
- * FNPT x Solder

6 70779 72313 6	3/4	-	20	1.89
-----------------	-----	---	----	------

		UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
3421LAB LF Tankless Water Heater Valve (Hot)		6 70779 72314 3	3/4	-	25	1.64	
	 * 600# WOG * Full Port * Virgin PTFE Seats * Integral base drain * Purge Port w/Cap * AB1953, NSF/ANSI 61 & 372 * FNPT x FNPT						
3431LAB LF EzPress Tankless Water Heater Valve (Hot)		6 70779 72315 0	3/4	-	25	1.71	
	 * 600# WOG * Full Port * Virgin PTFE Seats * Integral base drain * Purge Port w/Cap * AB1953, NSF/ANSI 61 & 372 * FNPT x EzPress						
3301AB LF Water Heater Isolation Valve (Hot)		6 70779 72218 4	3/4	-	25	1.80	
	 * 600# WOG * Full Port * Virgin PTFE Seats * Integral base drain * Purge Port w/Cap * FNPT x Solder * AB1953, NSF/ANSI 61 & 372						
3302AB LF Water Heater Isolation Valve (Cold)		6 70779 72219 1	3/4	-	25	1.68	
	 * 600# WOG * Full Port * Virgin PTFE Seats * Integral base drain * Purge Port w/Cap * FNPT x Solder * AB1953, NSF/ANSI 61 & 372						
3321AB LF Water Heater Isolation Valve (Hot)		6 70779 72221 4	3/4	-	25	1.80	
	 * 600# WOG * Full Port * Virgin PTFE Seats * Integral base drain * Purge Port w/Cap * FNPT x FNPT * AB1953, NSF/ANSI 61 & 372						
3322AB LF Water Heater Isolation Valve (Cold)		6 70779 72222 1	3/4	-	25	1.68	
	 * 600# WOG * Full Port * Virgin PTFE Seats * Integral base drain * Purge Port w/Cap * FNPT x FNPT * AB1953, NSF/ANSI 61 & 372						
3331AB LF EzPress Water Heater Isolation Valve (Hot)		6 70779 72224 5	3/4	-	25	1.80	
	 * 600# WOG * Full Port * Virgin PTFE Seats * Integral base drain * Purge Port w/Cap * FNPT x EzPress * AB1953, NSF/ANSI 61 & 372						
3332AB LF EzPress Water Heater Isolation Valve (Cold)		6 70779 72225 2	3/4	-	25	1.68	
	 * 600# WOG * Full Port * Virgin PTFE Seats * Integral base drain * Purge Port w/Cap * FNPT x EzPress * AB1953, NSF/ANSI 61 & 372						

938BESLAB Butterfly Valve Lug pattern



- * 200 PSI
- * Lug Type/Lever
- * Ductile Iron Body
- * Alum. Bronze Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat
- * AB1953, NSF/ANSI 61 & 372

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 71408 0	2	-	-	10	-
6 70779 71409 7	2-1/2	-	-	12	-
6 70779 71410 3	3	-	-	12	-
6 70779 71411 0	4	-	-	18	-
6 70779 71412 7	5	-	-	22	-
6 70779 71413 4	6	-	-	26	-
6 70779 71414 1	8	-	-	42	-
6 70779 71406 6	10	-	-	64	-
6 70779 71407 3	12	-	-	101	-

938BESGAB Butterfly Valve Lug pattern



- * 200 PSI Size 2" - 12"
- * 150 PSI Sizes 14" - Up
- * Lug Type/Gear
- * Ductile Iron Body
- * Alum. Bronze Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat
- * AB1953, NSF/ANSI 61 & 372

6 70779 72589 5	3	-	-	20	-
6 70779 72590 1	4	-	-	26	-
6 70779 72591 8	5	-	-	30	-
6 70779 71603 9	6	-	-	33	-
6 70779 71417 2	8	-	-	59	-
6 70779 71415 8	10	-	-	73	-
6 70779 71416 5	12	-	-	120	-
6 70779 72592 5	14	-	-	167	-

9517AB / 9519AB LF Brass Balancing Valve



- * 300# WOG
- * DZR Lead Free Brass Body
- * Fixed Orifice Design
- * Venturi Insert
- * Precision Adjustable Handwheel
- * Integral Memory Stop
- * Multi-turn adjustment
- * AB1953, NSF/ANSI 61 & 372

9517AB = Threaded Ends
9519AB = Solder Ends

9517ABU = Ultra Low Flow
9517ABL = Low Flow

9519ABU = Ultra Low Flow
9519ABL = Low Flow

9517AB

6 70779 70215 5	1/2	-	20	1.24	27
6 70779 70216 2	3/4	-	15	1.42	23
6 70779 70217 9	1	-	10	1.68	19
6 70779 70218 6	1-1/4	-	10	2.74	30
6 70779 70219 3	1-1/2	-	10	3.44	37
6 70779 70220 9	2	-	5	4.74	26

9517ABU

6 70779 70829 4	1/2	-	20	1.24	27
-----------------	-----	---	----	------	----

9517ABL

6 70779 70828 7	1/2	-	20	1.24	27
-----------------	-----	---	----	------	----

9519AB

6 70779 70221 6	1/2	-	20	1.16	26
6 70779 70222 3	3/4	-	15	1.28	22
6 70779 70223 0	1	-	10	1.52	17
6 70779 70224 7	1-1/4	-	10	2.46	27
6 70779 70225 4	1-1/2	-	10	3.12	33
6 70779 70226 1	2	-	5	4.54	24

9519ABU

6 70779 70831 7	1/2	-	20	1.16	26
-----------------	-----	---	----	------	----

9519ABL

6 70779 70830 0	1/2	-	20	1.16	26
-----------------	-----	---	----	------	----

9527AB / 9529AB LF Brass Balancing Valve



- * 300WOG
- * Lead Free Brass Body
- * On/Off Capability
- * Integral Memory Stop
- * Ready-to-mount On/Off Wax Actuator Available (See pg B8)
- * AB1953, NSF/ANSI 61 & 372

9527AB = Threaded Ends
9529AB = Solder Ends

9527ABL = Low Flow

9527AB

6 70779 70319 0	1/2	-	20	0.78	17
6 70779 70320 6	3/4	-	20	0.98	21
6 70779 70304 6	1	-	20	1.40	30
6 70779 71162 1	1-1/4	-	18	2.06	40
6 70779 71163 8	1-1/2	-	15	2.60	42
6 70779 71164 5	2	-	15	3.68	59

9527ABL

6 70779 70303 9	1/2	-	20	0.78	17
-----------------	-----	---	----	------	----

9529AB

6 70779 70321 3	1/2	-	20	0.70	16
6 70779 70322 0	3/4	-	20	0.94	21

206AB / 207AB LF Brass Gate Valve


- * 125# WSP
- * 200# WOG
- * Lead Free Brass Body
- * Screw In Bonnet
- * Non-Rising Stem
- * Solid Wedge Disc
- * AB1953, NSF/ANSI 61 & 372

206AB = Threaded Ends
207AB = Solder Ends

Cross Handle Option Available. See pg. 19



UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
206AB					
6 70779 20604 2	1/2	-	50	0.54	29
6 70779 20605 9	3/4	-	50	0.80	42
6 70779 20606 6	1	-	20	1.18	26
6 70779 20607 3	1-1/4	-	20	1.80	38
6 70779 20608 0	1-1/2	-	15	2.40	38
6 70779 20620 2	2	-	10	3.96	42
6 70779 20625 7	2-1/2	-	6	6.80	44
6 70779 20630 1	3	-	4	8.66	37
6 70779 20640 0	4	-	1	15.52	17
207AB					
6 70779 20704 9	1/2	-	50	0.44	24
6 70779 20705 6	3/4	-	50	0.74	40
6 70779 20706 3	1	-	20	1.08	24
6 70779 20707 0	1-1/4	-	20	1.60	35
6 70779 20708 7	1-1/2	-	15	2.24	35
6 70779 20720 9	2	-	10	4.18	44

267AB / 268AB LF Brass Gate Valve


- * 200# WOG
- * Lead Free Brass Body
- * Screw in Bonnet
- * Non-rising stem
- * Solid Wedge Disc
- * AB1953, NSF/ANSI 61 & 372

267AB = Threaded Ends
268AB = Solder Ends

Cross Handle Option Available. See pg. 19



267AB					
6 70779 25904 8	1/2	-	50	0.46	24
6 70779 25905 5	3/4	-	50	0.62	32
6 70779 25906 2	1	-	20	0.84	18
6 70779 25907 9	1-1/4	-	20	1.44	30
6 70779 25908 6	1-1/2	-	15	1.74	28
6 70779 25920 8	2	-	10	2.70	28
268AB					
6 70779 25804 1	1/2	-	50	0.36	20
6 70779 25805 8	3/4	-	50	0.56	29
6 70779 25806 5	1	-	20	0.74	16
6 70779 25807 2	1-1/4	-	20	1.36	29
6 70779 25808 9	1-1/2	-	15	1.64	26
6 70779 25820 1	2	-	10	2.52	27

380AB / 387AB LF Brass Wye Strainer


- * 125# WSP / 200# WOG
- * Lead Free Brass Body
- * SS 20 Mesh Screen
- * With "clean out" tap & plug
- * AB1953, NSF/ANSI 61 & 372

380AB = Threaded Ends
387AB = Solder Ends

380AB					
6 70779 70914 7	1/2	-	80	0.42	37
6 70779 70915 4	3/4	-	48	0.62	32
6 70779 70916 1	1	-	36	0.90	34
6 70779 70917 8	1-1/4	-	24	1.26	32
6 70779 70918 5	1-1/2	-	8	1.86	16
6 70779 70919 2	2	-	8	2.54	22
387AB					
6 70779 70920 8	1/2	-	80	0.40	33
6 70779 70921 5	3/4	-	48	0.54	28
6 70779 70922 2	1	-	36	0.78	61
6 70779 70923 9	1-1/4	-	24	1.34	33
6 70779 70924 6	1-1/2	-	8	1.82	16
6 70779 70925 3	2	-	8	2.56	22

232AB / 233AB LF Brass In-line Check Valve


- * 200# WOG
- * Lead Free Forged Brass Body
- * Spring Loaded (SS304 spring)
- * Horizontal or Vertical
- * Low Noise Operation
- * AB1953, NSF/ANSI 61 & 372

232AB = Threaded Ends
 NBR Seat
 Plastic Disc (POM)
233AB = Solder Ends
 FPM Seat
 Brass Disc

232AB					
6 70779 21504 4	1/2	-	180	0.26	48
6 70779 21505 1	3/4	-	72	0.36	27
6 70779 21506 8	1	-	72	0.56	42
6 70779 21507 5	1-1/4	-	48	0.82	42
6 70779 21508 2	1-1/2	-	24	1.10	28
6 70779 21520 4	2	-	12	1.62	21
233AB					
6 70779 20504 5	1/2	-	180	0.28	54
6 70779 20505 2	3/4	-	72	0.42	32
6 70779 20506 9	1	-	72	0.66	50
6 70779 20507 6	1-1/4	-	48	1.04	53
6 70779 20508 3	1-1/2	-	24	1.28	32
6 70779 20520 5	2	-	12	1.98	25

236AB / 237AB LF Brass Swing Check Valve



- * 125# WSP
- * 200# WOG
- * Lead Free Brass Body
- * Swing Check
- * "Y" Pattern
- * Brass Disc
- * MSS-SP-80
- * AB1953, NSF/ANSI 61 & 372

236AB = Threaded Ends
237AB = Solder Ends

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
236AB					
6 70779 22404 6	1/2	-	80	0.56	47
6 70779 22405 3	3/4	-	60	0.86	55
6 70779 22406 0	1	-	30	1.28	41
6 70779 22407 7	1-1/4	-	24	2.06	52
6 70779 22408 4	1-1/2	-	18	2.84	542
6 70779 22420 6	2	-	10	4.46	48

237AB					
6 70779 22204 2	1/2	-	80	0.54	44
6 70779 22205 9	3/4	-	60	0.86	54
6 70779 22206 6	1	-	30	1.28	41
6 70779 22207 3	1-1/4	-	24	1.98	50
6 70779 22208 0	1-1/2	-	18	2.76	52
6 70779 22220 2	2	-	10	4.60	49

246AB / 247AB / 244AB LF Brass Swing Check Valve



- * 200# WOG
- * Lead Free Brass Body
- * Horizontal "T" pattern
- * AB1953, NSF/ANSI 61 & 372

246AB = Threaded Ends
247AB = Solder Ends
244AB = EzPress Ends

246AB					
6 70779 70926 0	1/4	10	120	0.34	43
6 70779 70927 7	3/8	10	120	0.36	45
6 70779 24504 1	1/2	12	120	0.38	49
6 70779 24505 8	3/4	10	80	0.56	48
6 70779 24506 5	1	5	60	0.88	54
6 70779 24507 2	1-1/4	5	40	1.38	56
6 70779 24508 9	1-1/2	5	30	1.82	58
6 70779 24520 1	2	2	24	2.50	64
6 70779 70527 9	2-1/2	2	12	4.90	63
6 70779 70528 6	3	1	8	7.44	62
6 70779 70529 3	4	1	4	11.12	47

247AB					
6 70779 24404 4	1/2	12	120	0.34	43
6 70779 24405 1	3/4	10	80	0.58	49
6 70779 24406 8	1	5	60	0.78	50
6 70779 24407 5	1-1/4	5	40	1.22	53
6 70779 24408 2	1-1/2	5	30	1.82	58
6 70779 24420 4	2	2	24	2.62	67
6 70779 70832 4	2-1/2	2	15	4.72	74
6 70779 70833 1	3	1	6	7.00	44
6 70779 70834 8	4	1	4	11.72	51

244AB					
6 70779 72569 7	1/2	12	120	0.47	58
6 70779 72570 3	3/4	10	80	0.66	55
6 70779 72571 0	1	5	60	0.95	59
6 70779 72572 7	1-1/4	5	40	1.46	61
6 70779 72573 4	1-1/2	5	30	2.09	65
6 70779 72574 1	2	2	24	2.83	70

1900AB LF Dielectric Union



- * Female NPT x Copper
- * Forged Steel
- * Lead Free Brass Tailpiece
- * ANSI B16.39
- * EPDM Seals
- * AB1953, NSF/ANSI 61 & 372

6 70779 70618 4	1/2	12	144	0.32	51
6 70779 70619 1	3/4	12	144	0.42	66
6 70779 70620 7	1	12	120	0.54	71
6 70779 70621 4	1-1/4	6	48	0.84	41
6 70779 70622 1	1-1/2	6	48	1.26	66
6 70779 706238	2	6	24	2.08	55

RW-315AB / RW-315ABBLUE LF Hose Bibb


- * 125# CWP
- * Lead Free Brass Body
- * Virgin PTFE Seats
- * Male Thread x Hose
- (1/2" size also accepts copper pipe for solder joint)
- * No Kink Spout
- * Double NBR O-Ring Packing
- * AB1953, NSF/ANSI 61 & 372

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
RW-315AB					
6 70779 31304 7	1/2	-	80	0.40	39
6 70779 31305 4	3/4	-	60	0.44	35

RW-315ABBLUE					
6 70779 71591 9	1/2	-	80	0.40	39
6 70779 71592 6	3/4	-	60	0.44	35

RW-316AB LF Brass PEX Hose Bibb


- * 125# CWP
- * Lead Free Brass Body
- * Virgin PTFE Seats
- * PEX (F1807) x Hose
- * No Kink Spout
- * Double NBR O-Ring Packing
- * AB1953, NSF/ANSI 61 & 372

6 70779 71203 1	1/2	-	80	0.46	33
6 70779 71204 8	3/4	-	60	0.54	26

RW-320AB LF Brass EzPress Hose Bibb


- * 125# CWP
- * Lead Free Brass Body
- * Virgin PTFE Seats
- * EzPress x Hose
- * No Kink Spout
- * Double NBR O-Ring Packing
- * AB1953, NSF/ANSI 61 & 372

6 70779 71466 0	1/2	-	80	0.35	39
6 70779 71467 7	3/4	-	50	0.40	20

RW-301AB LF Brass Hose Bibb


- * 125# CWP
- * Lead Free Brass Body
- * End Connection: Male Thd. x Hose
- CxC = 1/2" size only
- * AB1953, NSF/ANSI 61 & 372

6 70779 70912 3	1/2	-	48	0.36	17
6 70779 70913 0	3/4	-	48	0.38	18

RW-514AB / RW-516AB LF Brass PEX Ball Valve Boiler Drain



RW-514AB



RW-516AB



- * 125# CWP
- * Lead Free Brass Body
- * Virgin PTFE Seats
- * No Kink Spout
- * Double NBR O-Ring Packing
- * AB1953, NSF/ANSI 61 & 372

RW-514AB = Male Thd. x Hose
(1/2" size also accepts
copper pipe for solder joint)

RW-516AB = PEX (F1807) x Hose

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
RW-514AB 6 70779 72215 3	1/2	12	48	0.30	16
6 70779 72216 0	3/4	12	48	0.34	18

RW-516AB

6 70779 71205 5	1/2	12	48	0.23	13
6 70779 71206 2	3/4	12	48	0.26	15

RW-504AB / RW-505AB LF Brass Boiler Drain



RW-504AB



RW-505AB



- * 125# CWP
- * Lead Free Brass Body
- * Male Thd. x Hose
- * AB1953, NSF/ANSI 61 & 372

RW-504AB = Male Thd. x Hose
(1/2" size also accepts
copper pipe for solder joint)

RW-505AB = Female x Hose

RW-504AB

6 70779 70902 4	1/2	12	48	0.44	23
6 70779 70903 1	3/4	12	48	0.46	24

RW-505AB

6 70779 70904 8	1/2	12	48	0.42	22
6 70779 70905 5	3/4	12	48	0.46	24

RW-213AB / RW-223AB LF Brass Stop Valve



RW-213AB



RW-223AB



- * 125# CWP
- * Lead Free Brass Body
- * Solder Ends
- * Adjustable Packing
- * Drain Plug (RW-223AB)
- * AB1953, NSF/ANSI 61 & 372

RW-213AB

6 70779 70906 2	1/2	12	48	0.40	22
6 70779 70907 9	3/4	12	48	0.56	29

RW-223AB

6 70779 70900 0	1/2	12	48	0.44	23
6 70779 70901 7	3/4	12	48	0.58	30

RW-252AB / RW-272AB LF Brass Sillcock



RW-252AB



RW-272AB



- * 125# CWP
- * Lead Free Brass Body
- * AB1953, NSF/ANSI 61 & 372

RW-252AB = Female (IPS) x Hose
RW-272AB = Solder x Hose

RW-252AB

6 70779 70908 6	1/2	12	48	0.50	26
6 70779 70909 3	3/4	12	48	0.52	27

RW-272AB

6 70779 70910 9	1/2	12	48	0.46	25
6 70779 70911 6	3/4	12	48	0.52	26

5044AB/5049AB	Extension Stem (ES)	Wing "T" Handle	Replacement Handle	Memory Stop	Locking Lever Handle	Memory Stop for ES
1/4"	5044/49F-ES 1/4	5044/49F-WH 1/4	5044AB-LHK or 5049AB-LHK 1/4	5044/49F-MS 1/4	5044AB-LL or 5049AB-LL 1/4	5044/49F-MSES 1/4
3/8"	5044/49F-ES 1/4	5044/49F-WH 1/4	5044AB-LHK or 5049AB-LHK 1/4	5044/49F-MS 1/4	5044AB-LL or 5049AB-LL 1/4	5044/49F-MSES 1/4
1/2"	5044/49F-ES 1/2	5044/49F-WH 1/2	5044AB-LHK or 5049AB-LHK 1/2	5044/49F-MS 1/2	5044AB-LL or 5049AB-LL 1/2	5044/49F-MSES 1/2
3/4"	5044/49F-ES 1/2	5044/49F-WH 1/2	5044AB-LHK or 5049AB-LHK 1/2	5044/49F-MS 1/2	5044AB-LL or 5049AB-LL 1/2	5044/49F-MSES 1/2
1"	5044/49F-ES 1	5044/49F-WH 1	5044AB-LHK or 5049AB-LHK 1	5044/49F-MS 1	5044AB-LL or 5049AB-LL 1	5044/49F-MSES 1
1-1/4"	5044/49F-ES 1	5044/49F-WH 1	5044AB-LHK or 5049AB-LHK 1	5044/49F-MS 1	5044AB-LL or 5049AB-LL 1	5044/49F-MSES 1
1-1/2"	5044/49F-ES 1-1/2	5044/49F-WH 1-1/2	5044AB-LHK or 5049AB-LHK 1-1/2	5044/49F-MS 1-1/2	5044AB-LL or 5049AB-LL 1-1/2	5044/49F-MSES 1-1/2
2"	5044/49F-ES 1-1/2	5044/49F-WH 1-1/2	5044AB-LHK or 5049AB-LHK 1-1/2	5044/49F-MS 1-1/2	5044AB-LL or 5049AB-LL 1-1/2	5044/49F-MSES 1-1/2
2-1/2" - 4"	5044/49F-ES 2-1/2		5044AB-LHK or 5049AB-LHK 3			

5544AB/5549AB	Extension Stem (ES)	Wing "T" Handle	Replacement Handle	Memory Stop	Locking Lever Handle	Memory Stop for ES
1/4"	5044/49F-ES 1/4	5044/49F-WH 1/4	5544AB-LHK or 5549AB-LHK 1/4	5044/49F-MS 1/4	5544AB-LL or 5549AB-LL 1/4	5044/49F-MSES 1/4
3/8"	5044/49F-ES 1/4	5044/49F-WH 1/4	5544AB-LHK or 5549AB-LHK 1/4	5044/49F-MS 1/4	5544AB-LL or 5549AB-LL 1/4	5044/49F-MSES 1/4
1/2"	5044/49F-ES 1/2	5044/49F-WH 1/2	5544AB-LHK or 5549AB-LHK 1/2	5044/49F-MS 1/2	5544AB-LL or 5549AB-LL 1/2	5044/49F-MSES 1/2
3/4"	5044/49F-ES 1/2	5044/49F-WH 1/2	5544AB-LHK or 5549AB-LHK 1/2	5044/49F-MS 1/2	5544AB-LL or 5549AB-LL 1/2	5044/49F-MSES 1/2
1"	5044/49F-ES 1	5044/49F-WH 1	5544AB-LHK or 5549AB-LHK 1	5044/49F-MS 1	5544AB-LL or 5549AB-LL 1	5044/49F-MSES 1
1-1/4"	5044/49F-ES 1	5044/49F-WH 1	5544AB-LHK or 5549AB-LHK 1	5044/49F-MS 1	5544AB-LL or 5549AB-LL 1	5044/49F-MSES 1
1-1/2"	5044/49F-ES 1-1/2	5044/49F-WH 1-1/2	5544AB-LHK or 5549AB-LHK 1-1/2	5044/49F-MS 1-1/2	5544AB-LL or 5549AB-LL 1-1/2	5044/49F-MSES 1-1/2
2"	5044/49F-ES 1-1/2	5044/49F-WH 1-1/2	5544AB-LHK or 5549AB-LHK 1-1/2	5044/49F-MS 1-1/2	5544AB-LL or 5549AB-LL 1-1/2	5044/49F-MSES 1-1/2
2-1/2" - 4"	5044/49F-ES 2-1/2	-	5544AB-LHK or 5549AB-LHK 2-1/2	-	-	-

5592AB/5595AB	Extension Stem (ES)	Wing "T" Handle	Replacement Handle
1/4"	5592/95F-ES 1/4	-	-
3/8"	5592/95F-ES 1/4	-	-
1/2"	5592/95F-ES 1/2	5592AB-WH or 5595AB-WH 1/2	5592AB-LH or 5595AB-LH 1/2
3/4"	5592/95F-ES 1/2	5592AB-WH or 5595AB-WH 1/2	5592AB-LH or 5595AB-LH 1/2
1"	5592/95F-ES 1	5592AB-WH or 5595AB-WH 1	5592AB-LH or 5595AB-LH 1
1-1/4"	5592/95F-ES 1	5592AB-WH or 5595AB-WH 1	5592AB-LH or 5595AB-LH 1
1-1/2"	5592/95F-ES 1-1/2	-	-
2"	5592/95F-ES 1-1/2	-	-
2-1/2" - 4"	5592/95F-ES 2-1/2	-	-



Extension Stem



Locking Lever



Wing Handle

5020AB	Extension Stem (ES)	Wing "T" Handle	Replacement Handle	Memory Stop	Locking Lever Handle	Memory Stop for ES
1/4"	-	5044/49F-WH 1/4	5044AB-LHK or 5049AB-LHK 1/4	-	-	-
3/8"	-	5044/49F-WH 1/4	5044AB-LHK or 5049AB-LHK 1/4	-	-	-
1/2"	5044/49F-ES 1/2	5044/49F-WH 1/2	5044AB-LHK or 5049AB-LHK 1/2	5044/49F-MS 1/2	5020AB-LL 1/2	5044/49F-MSES 1/2
3/4"	5044/49F-ES 1/2	5044/49F-WH 1/2	5044AB-LHK or 5049AB-LHK 1/2	5044/49F-MS 1/2	5020AB-LL 1/2	5044/49F-MSES 1/2
1"	5044/49F-ES 1	5044/49F-WH 1	5044AB-LHK or 5049AB-LHK 1	5044/49F-MS 1	5020AB-LL 1	5044/49F-MSES 1
1-1/4"	5044/49F-ES 1	5044/49F-WH 1	5044AB-LHK or 5049AB-LHK 1	5044/49F-MS 1	5020AB-LL 1	5044/49F-MSES 1
1-1/2"	5044/49F-ES 1-1/2	5044/49F-WH 1-1/2	5044AB-LHK or 5049AB-LHK 1-1/2	5044/49F-MS 1-1/2	5544AB-LL or 5549AB-LL 1-1/2	5044/49F-MSES 1-1/2
2"	5044/49F-ES 1-1/2	5044/49F-WH 1-1/2	5044AB-LHK or 5049AB-LHK 1-1/2	5044/49F-MS 1-1/2	5544AB-LL or 5549AB-LL 1-1/2	5044/49F-MSES 1-1/2
2-1/2" - 4"	5044/49F-ES 2-1/2	-	5044AB-LHK or 5049AB-LHK 3	-	-	-

5065AB	Compression Ferrule only	Compression Nut
1/2"	5065-FER 1/2	5065-CN 1/2
3/4"	5065-FER 3/4	5065-CN 3/4
1"	5065-FER 1	5065-CN 1

5070AB / 3450AB	Disassembly Tool
1/2"	5070-RT 1/2



50xxAB PEX valves (F1807 & F1970)	Extension Stem (ES)	Wing "T" Handle
1/2"	5592/95F-ES 1/4	5006AB-WH, 5007AB-WH, 5008AB-WH, 5009AB-WH, 5015AB-WH, 5016AB-WH, 5017AB-WH or 5018AB-WH 1/2
3/4"	5592/95F-ES 1/2	5006AB-WH, 5007AB-WH, 5008AB-WH, 5009AB-WH, 5015AB-WH, 5016AB-WH, 5017AB-WH or 5018AB-WH 3/4
1"	5592/95F-ES 1/2	5006AB-WH, 5007AB-WH, 5008AB-WH, 5009AB-WH, 5015AB-WH, 5016AB-WH, 5017AB-WH or 5018AB-WH 3/4
1-1/4"	5592/95F-ES 1	5015AB-WH 1-1/4 (Available only for 5015AB)
1-1/2"	5592/95F-ES 1	5015AB-WH 1-1/2 (Available only for 5015AB)
2"	5592/95F-ES 1-1/2	5015AB-WH 2 (Available only for 5015AB)
2-1/2" - 3"	5592/95F-ES 1-1/2	-

541xAB PEX valves (Everloc®)	Extension Stem (ES)	Wing "T" Handle
1/2"	5592/95F-ES 1/4	5415AB-WH 1/2
3/4"	5592/95F-ES 1/2	5415AB-WH 3/4
1"	5592/95F-ES 1/2	5415AB-WH 3/4
1-1/4"	5592/95F-ES 1	5415AB-WH 1-1/4
1-1/2"	5592/95F-ES 1	5415AB-WH 1-1/4
2"	5592/95F-ES 1-1/2	5415AB-WH 2



Extension Stem



Wing Handle

1500AB / 1515AB 1501AB / 1516AB 1501PAB / 1516PAB	Extension Stem (ES)	Wing "T" Handle
1/2"	1500AB-ES 1/2	500AB-WH 1/2
3/4"	1500AB-ES 1/2	500AB-WH 1/2
1"	1500AB-ES 1/2	500AB-WH 1/2
1-1/4"	1500AB-ES 1-1/4	-
1-1/2"	1500AB-ES 1-1/4	-
2"	500AB-ES 2	-
2-1/2"	500AB-ES 2	-



Extension Stem



Wing Handle

3400AB / 3420AB / 3430AB 3400LAB / 3420LAB / 3430LAB	Relief Valve 200K BTU/HR	Relief Valve 500K BTU/HR	Relief Valve 2.7M BTU/HR	Union Assembly	O-Ring / gasket for union only
3/4"	3405 3/4	3406 3/4	-	3400/3420-UK 3/4	3400/3420-OR 3/4
1"	-	-	3407 3/4	3400/3420-UK 1	3400/3420-OR 1

206AB / 207AB	Cross Handle	Regular Handwheel
1/2"	206/211-CH 1	206/207ABF-H 1/2
3/4"	206/211-CH 1	206/207ABF-H 1/2
1"	206/211-CH 2	206/207ABF-H 1
1-1/4"	206/211-CH 3	206/207ABF-H 1-1/4
1-1/2"	206/211-CH 3	206/207ABF-H 2
2"	206/211-CH 4	206/207ABF-H 2
2-1/2" - 3"	206/211-CH 5	206/207ABF-H 2-1/2



Hand Wheel



Hand Wheel



Cross Handle

267AB / 268AB	Cross Handle	Regular Handwheel
1/2"	267-CH 1/2	267/268-HK 1/2
3/4"	267-CH 1/2	267/268-HK 1/2
1"	267-CH 1	267/268-HK 1
1-1/4"	267-CH 1-1/4	267/268-HK 1-1/4
1-1/2"	267-CH 1-1/4	267/268-HK 1-1/4
2"	267-CH 2	267/268-HK 2
2-1/2" - 3"	267-CH 2-1/2	267/268-HK 2-1/2
4"	267-CH 3	267/268-HK 3

5044F Brass Full Port Ball Valve


- * 150# WSP / 600# WOG
- * Brass Body
- * Threaded Ends
- * Chrome-Plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * 550 PSI (1-1/2", 2") for UL use
- * CSA 1/2, 5 & 125 PSI (1/2" - 2")
- * CSA 1/2 & 5 PSI (2-1/2" - 3")
- * UL (1/4" - 2"), FM (1/2" - 2")
- * Vacuum rating: 29 in-Hg

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 54402 1	1/4	-	80	0.34	30
6 70779 54403 8	3/8	-	80	0.32	28
6 70779 54404 5	1/2	-	80	0.58	49
6 70779 54405 2	3/4	-	60	0.86	54
6 70779 54406 9	1	-	45	1.34	64
6 70779 54407 6	1-1/4	-	30	2.14	68
6 70779 54408 3	1-1/2	-	24	3.14	79
6 70779 54420 5	2	-	10	5.00	52
6 70779 54425 0	2-1/2	-	6	9.86	63
6 70779 54430 4	3	-	4	14.16	60
6 70779 54440 3	4	-	2	19.70	44

5049F Brass Full Port Ball Valve


- * 150# WSP
- * 600# WOG
- * Brass Body
- * Solder Ends
- * Chrome-Plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * Vacuum rating: 29 in-Hg

6 70779 54903 3	3/8	-	80	0.28	24
6 70779 54904 0	1/2	-	80	0.56	49
6 70779 54905 7	3/4	-	60	0.80	51
6 70779 54906 4	1	-	45	1.18	56
6 70779 54907 1	1-1/4	-	30	2.08	66
6 70779 54908 8	1-1/2	-	24	3.00	76
6 70779 54920 0	2	-	15	4.50	8
6 70779 54925 5	2-1/2	-	6	9.02	58
6 70779 54930 9	3	-	4	13.50	58
6 70779 70323 7	4	-	2	16.44	36

5080B Bronze Full Port Ball


- * 600WOG/150WSP up to 2"
- * 400WOG/125WSP above 2"
- * B62-C83600 Bronze Cast Body
- * Threaded Ends
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Gland Packing
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MS-SSP-110

6 70779 71595 7	3/8	-	80	0.32	28
6 70779 70657 3	1/2	-	80	0.59	49
6 70779 70658 0	3/4	-	60	0.86	53
6 70779 70659 7	1	-	45	1.41	65
6 70779 70660 3	1-1/4	-	30	2.20	67
6 70779 70661 0	1-1/2	-	24	3.16	77
6 70779 70662 7	2	-	15	4.94	76
6 70779 70883 6	2-1/2	-	6	10.24	63
6 70779 70884 3	3	-	4	14.57	60

5080BSS Bronze Full Port BV with S.S. Trim


- * 600WOG/150WSP up to 2"
- * 400WOG/125WSP above 2"
- * B62-C83600 Bronze Cast Body
- * Threaded Ends
- * SS316 Ball & Stem / SS304 Handle
- * Virgin PTFE Graphite reinf. Seats
- * Gland Packing
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MS-SSP-110

6 70779 70663 4	1/2	-	80	0.59	49
6 70779 70664 1	3/4	-	60	0.86	53
6 70779 70665 8	1	-	45	1.41	65
6 70779 70666 5	1-1/4	-	30	2.20	67
6 70779 70667 2	1-1/2	-	24	3.16	77
6 70779 70668 9	2	-	15	4.94	76

5592F Brass Full Port Ball Valve


- * 150# WSP / 600# WOG
- * Brass Body
- * Threaded Ends
- * Chrome-Plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110
- * CSA 1/2, 5 & 125 PSI (1/4" - 2")
- * CSA ΔC (1/2" - 2")
- * CSA 1/2 PSI (2-1/2" - 3")

6 70779 70957 4	1/4	-	80	0.28	24
6 70779 70958 1	3/8	-	80	0.28	25
6 70779 55504 1	1/2	-	80	0.42	36
6 70779 55505 8	3/4	-	60	0.58	37
6 70779 55506 5	1	-	45	0.98	48
6 70779 55507 2	1-1/4	-	30	1.36	43
6 70779 55508 9	1-1/2	-	24	1.88	47
6 70779 55520 1	2	-	15	2.94	47
6 70779 70947 5	2-1/2	-	6	6.20	40
6 70779 70948 2	3	-	4	8.92	39

5595F Brass Full Port Ball Valve


- * 150# WSP / 600# WOG
- * Brass Body
- * Solder Ends
- * Chrome-Plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MSS-SP-110

6 70779 55804 2	1/2	-	80	0.38	33
6 70779 55805 9	3/4	-	60	0.54	34
6 70779 55806 6	1	-	45	0.42	45
6 70779 55807 3	1-1/4	-	30	1.18	38
6 70779 55808 0	1-1/2	-	24	1.76	45
6 70779 55820 2	2	-	15	2.86	45

5544S Brass Full Port Ball Valve with S.S. Trim

- * 150# WSP/ 600# WOG
- * Brass Body, Threaded Ends
- * 316 S.S. Ball & Stem
- * Virgin PTFE Seats
- * Blow-Out Proof Stem
- * MSS-SP-110
- * Adjustable Packing Nut

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 46704 7	1/2	-	80	0.48	40
6 70779 46705 4	3/4	-	60	0.74	45
6 70779 46706 1	1	-	45	1.14	53
6 70779 46707 8	1-1/4	-	30	1.54	48
6 70779 46708 5	1-1/2	-	24	2.61	62
6 70779 46720 7	2	-	15	3.60	77

5042 Brass Auto-Drain Ball Valve

← Drain in body

- * 600# WOG, Brass Body
- * Threaded Ends
- * Full Port
- * Automatic Drain Hole
- * Chrome-Plated Ball
- * Virgin PTFE Seats
- * Locking Handles
- * MSS-SP-110

6 70779 54204 1	1/2	-	80	0.60	51
6 70779 54205 8	3/4	-	60	0.84	54
6 70779 54206 5	1	-	45	1.40	67
6 70779 54207 2	1-1/4	-	30	2.16	69
6 70779 54208 9	1-1/2	-	24	3.54	89
6 70779 54220 1	2	-	15	5.70	90

5045 Brass 3-Way Ball Valve

- * 125# WSP/ 400# WOG
- * Brass Body
- * Threaded Ends
- * Regular "L" Port Ball
- * Virgin PTFE Seats
- * Blow-Out Proof Stem
- * O-ring packing
- * Mounting Pad

6 70779 54503 5	3/8	-	100	0.30	39
6 70779 54504 2	1/2	-	80	0.42	41
6 70779 54505 9	3/4	-	60	0.70	53
6 70779 54506 6	1	-	40	1.52	61
6 70779 54507 3	1-1/4	-	25	1.90	51
6 70779 54508 0	1-1/2	-	20	2.74	60
6 70779 54520 2	2	-	15	4.60	74

5090 Brass Relief Ball Valve

- * 600# WOG
- * Full Port Forged Brass Body
- * Threaded Ends
- * Chrome-plated Ball
- * Blow-Out Proof Stem
- * Relief Valve Port w/ Relief Valve
- * Relief Valve Set at 100 psi
- * Barbed Outlet for Drain Routing

6 70779 48104 3	1/2	-	50	0.76	41
6 70779 48105 0	3/4	-	40	1.00	43
6 70779 48106 7	1	-	25	1.48	40

5581 Brass Male x Female Ball Valve

- * 150# WSP/ 600# WOG
- * Brass Body
- * Male x Female Threaded Ends
- * Chrome-Plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem

6 70779 53704 7	1/2	-	80	0.44	38
6 70779 53705 4	3/4	-	60	0.60	40
6 70779 53706 1	1	-	45	1.04	50
6 70779 53707 8	1-1/4	-	30	1.40	45
6 70779 53708 5	1-1/2	-	24	1.94	50
6 70779 53720 7	2	-	15	3.10	50

5586 Brass Hose End Ball Valve

- * 150# WSP/ 600# WOG
- * Brass Body
- * FNPT x Hose Ends
- * Full Port
- * Drain Cap w/ Chain
- * Chrome-Plated Ball
- * Virgin PTFE Seats

6 70779 53805 1	3/4	-	72	0.64	42
-----------------	-----	---	----	------	----

5017SMW (Snow Melt) PEX (F1960) Transition Ball Valve


- * 400# WOG
- * DZR Lead Free Brass Body
- * Full port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1960) x Solder
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * ASTM-F1960

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 71477 6	5/8	-	60	0.43	24

5070 EzGRIP Brass Ball Valve


- * 200# WOG
- * Full Port Forged Brass Body
- * EzGRIP Push-Fit Ends
- * Adjustable Packing
- * Blow-Out Proof Stem
- * Work w/ Copper, CPVC & PEX tubing
- * Field adjustable/Removable

6 70779 47604 9	1/2	-	80	0.45	66
6 70779 47605 6	3/4	-	60	0.65	53
6 70779 47606 3	1	-	45	1.10	54



See pg. 33 for Disassembly Tool

Disassembly Tool

5020 EzPress Bronze Full Port Ball Valve


- * 600# WOG Body
- * Bronze Body
- * Dual EzPress Ends
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * Install in open position
- * MSS-SP-110
- * 250 PSI end connections

6 70779 48904 9	1/2	-	50	0.54	29
6 70779 48905 6	3/4	-	50	0.80	43
6 70779 48906 3	1	-	40	1.28	54
6 70779 48907 0	1-1/4	-	35	1.92	71
6 70779 48908 7	1-1/2	-	20	3.08	66
6 70779 48920 9	2	-	12	4.42	52

5024 EzPress x FNPT Bronze Ball Valve


- * 200# WOG Body
- * Bronze Body
- * EzPress x FNPT Ends
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * Install in open position
- * MSS-SP-110
- * 250 PSI EzPress connection

6 70779 70011 3	1/2	-	50	0.56	30
6 70779 70012 0	3/4	-	50	0.80	43
6 70779 70013 7	1	-	40	1.28	55
6 70779 70014 4	1-1/4	-	35	1.94	72
6 70779 70015 1	1-1/2	-	20	3.16	67
6 70779 70016 8	2	-	12	4.58	58

5023 EzPress Brass Full Port Ball Valve


- * 600# WOG Body
- * Brass Body
- * Virgin PTFE Seats
- * Chrome-plated Ball
- * Male Ends for Press Fittings
- * Blow-Out Proof Stem
- * Adjustable Packing Nut
- * EzPress System
- * MSS-SP-110

6 70779 48704 5	1/2	-	50	0.44	24
6 70779 48705 2	3/4	-	50	0.62	33
6 70779 48706 9	1	-	50	0.98	53
6 70779 48707 6	1-1/4	-	35	1.50	56
6 70779 48708 3	1-1/2	-	20	2.30	49
6 70779 48720 5	2	-	12	3.42	45

250 EzPress Bronze Check Valve


- * 200# WOG
- * Bronze Body
- * Y-Pattern Design
- * Bronze Disc
- * Dual EzPress Ends

6 70779 25004 5	1/2	-	30	0.62	20
6 70779 25005 2	3/4	-	25	1.02	29
6 70779 25006 9	1	-	20	0.16	35
6 70779 25007 6	1-1/4	-	15	2.38	38
6 70779 25008 3	1-1/2	-	10	3.16	35
6 70779 25020 5	2	-	4	5.54	24

2420F EzPress Pump Flange Ball

- * 600# WOG
- * 3-Piece Brass Construction
- * Full Port
- * Rotating Flange Design
- * 1/4 Turn Ball Valve Style
- * Includes Bolt kit
- * Includes Wing handle
- * EzPress x Flange
- * 250 PSI EzPress connection

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 71090 7	3/4	-	24	1.50	39
6 70779 70963 5	1	-	18	1.92	37
6 70779 70964 2	1-1/4	-	18	2.20	41
6 70779 70965 9	1-1/2	-	12	2.80	36
6 70779 0966 6	2	-	8	4.16	36

2417 / 2419 Pump Flange Ball Valve

- * 600# WOG
- * 3-Piece Brass Construction
- * Full Port
- * Rotating Flange Design
- * 1/4 Turn Ball Valve Style
- * Includes Bolt kit
- * Includes Wing handle

2417 = FNPT x Flange
2419 = Solder x Flange

2417 FNPT End

6 70779 70017 5	3/4	-	24	1.44	37
6 70779 70018 2	1	-	18	1.86	36
6 70779 70019 9	1-1/4	-	18	2.18	42
6 70779 70020 5	1-1/2	-	12	2.64	35
6 70779 70021 2	2	-	8	3.86	34

2419 Solder End

6 70779 70027 4	3/4	-	24	1.40	37
6 70779 70028 1	1	-	18	1.82	35
6 70779 70029 8	1-1/4	-	18	2.10	40
6 70779 70030 4	1-1/2	-	12	2.56	34
6 70779 70031 1	2	-	20	3.86	83

2412 / 2415 / 2422F Pump Flange Ball Valve w/ Drain

- * 600# WOG
- * 3-Piece Brass Construction
- * Rotating Flange Design
- * Design w/ Drain Valve
- * Full Port
- * 1/4 Turn Ball Valve Style
- * 1-1/2" - 2" are fixed flange
- * Includes Bolt kit
- * Includes Wing Handle

2412 = FNPT x Flange
2415 = Solder x Flange
2422F = EzPress End x Flange
250 PSI EzPress connection

2412 FNPT End

6 70779 24105 0	3/4	-	24	1.80	46
6 70779 24106 7	1	-	18	2.26	43
6 70779 24107 4	1-1/4	-	18	2.62	50
6 70779 24108 1	1-1/2	-	12	3.16	40
6 70779 24120 3	2	-	8	4.74	40

2415 Solder End

6 70779 22705 4	3/4	-	24	1.76	45
6 70779 22706 1	1	-	18	2.18	42
6 70779 22707 8	1-1/4	-	18	2.52	48
6 70779 22708 5	1-1/2	-	12	3.48	44
6 70779 22720 7	2	-	8	4.90	42

2422F EzPress End

6 70779 71826 2	3/4	-	20	1.62	41
6 70779 71827 9	1	-	20	2.01	38
6 70779 71828 6	1-1/4	-	16	2.34	44
6 70779 71829 3	1-1/2	-	14	3.04	39
6 70779 71830 9	2	-	10	4.44	38

5930 24V Actuated Ball Valve

- * 600# WOG
- * Brass Full Port Body
- * Virgin PTFE Seats
- * EPDM Perox O-ring Packing
- * Blow-Out Proof Stem
- * 24VAC Electric Actuator

6 70779 72229 0	1/2	-	4	2.64	13
6 70779 72230 6	3/4	-	4	2.86	14
6 70779 72231 3	1	-	4	3.34	16
6 70779 72232 0	1-1/4	-	4	4.04	18
6 70779 72233 7	1-1/2	-	4	4.98	22
6 70779 72234 4	2	-	4	6.74	29

5081 / 5082 / 5083 / 5084 Mini Ball Valve

- * 150# WSP/ 600# WOG
- * Full Port Forged Brass Body
- * Virgin PTFE Seats
- * Chrome-plated Ball
- * FPM O-ring packing
- * CSA 1/2 PSIG
- * Blow-Out Proof Stem

5081 = FNPT x MNPT
5082 = FNPT x MNPT
5083 = FNPT x MNPT
5084 = FNPT x FNPT

5081 (1/8F x 1/8M)

6 70779 58101 9	1/8 x 1/8	-	80	0.18	16
-----------------	-----------	---	----	------	----

5082 (1/4F x 1/8M)

6 70779 58202 3	1/4 x 1/8	-	80	0.14	15
-----------------	-----------	---	----	------	----

5083 (1/4F x 1/4M)

6 70779 58302 0	1/4 x 1/4	-	80	0.18	15
-----------------	-----------	---	----	------	----

5084 (1/4F x 1/4F)

6 70779 58402 7	1/4 x 1/4	-	80	0.16	14
-----------------	-----------	---	----	------	----

5100 1-piece Brass Gas Ball Valve


- * 175# PSI
- * 1-Piece Brass Body
- * Threaded Ends
- * CSA 1/2 PSIG, 5G
- * CSA ΔC
- * UL

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 49504 0	1/2	120	120	0.32	39
6 70779 49505 7	3/4	120	120	0.40	49

5200 / 5200T / 5200S Brass CSA Gas Ball Valve


5200



5200T

5200S



- * 175# PSI
 - * 2-Piece Brass Body
 - * Threaded Ends
 - * CSA 1/2 PSIG, 5G
 - * CSA ΔC
 - * UL
- 5200** = Lever Handle
5200T = T Block Style Handle
5200S = Square Handle

5200					
6 70779 51303 4	3/8	24	144	0.22	38
6 70779 52004 9	1/2	20	120	0.30	38
6 70779 52005 6	3/4	10	120	0.46	57
6 70779 52006 3	1	6	36	0.76	29
5200T					
6 70779 52603 4	3/8	24	144	0.28	46
6 70779 52604 1	1/2	20	120	0.30	38
6 70779 52605 8	3/4	10	120	0.46	57
6 70779 52606 5	1	6	36	0.74	29
5200S					
6 70779 52303 3	3/8	24	144	0.26	40
6 70779 52304 0	1/2	20	120	0.36	46
6 70779 52305 7	3/4	10	120	0.50	62
6 70779 52306 4	1	6	48	1.12	57

5210 / 5211 / 5212 / 5221 CSA Gas Ball Valve


5210



5211



5212



5221



- * 175# PSI
 - * Brass Body
 - * CSA 1/2 PSIG, 5G
 - * CSA ΔC
 - * Lever Handle
- 5210** = 1/2" IPS x 3/8" Flared
5211 = 1/2" IPS x 1/2" Flared
5212 = 1/2" IPS x 15/16" Flared
(*) 5221 = 3/4" IPS x 15/16" Flared
 (*)CSA 5G only

5210					
6 70779 52104 6	1/2	12	144	0.30	46
5211					
6 70779 52404 7	1/2	12	120	0.32	40
5212					
6 70779 40404 2	1/2	12	96	0.38	38
5221					
6 70779 52505 1	3/4	12	96	0.52	50

5231 Brass CSA Gas Ball Valve


- * 175# PSI
 - * Brass Body
 - * Flare x Flare Ends
 - * CSA 1/2 PSIG, 5G
 - * CSA ΔC
- 5/8" = CSA 1/2 PSIG only

6 70779 51503 8	3/8	12	144	0.28	46
6 70779 51504 5	1/2	12	120	0.28	35
6 70779 51599 1	5/8	12	96	0.56	56

5241 Brass CSA Gas Ball Valve


- * 175# PSI, Brass Body
 - * CSA 1/2 PSIG, 5G
 - * CSA ΔC (3/8" & 1/2" only)
 - * Lever Handle, Angle Body
- 3/8"** = 1/2" NPT x 3/8" Flare
1/2" = 1/2" NPT x 1/2" Flare
(*) 3/4" = 3/4" NPT x 5/8" Flare
 (*)CSA 5G only

6 70779 51403 1	3/8	12	144	0.44	64
6 70779 51404 8	1/2	12	120	0.44	55
6 70779 51405 5	3/4	12	96	0.54	51

206F Brass Gate Valve

- * 125# WSP
- * 200# WOG
- * Brass Body
- * Screw in Bonnet
- * Non-Rising Stem
- * Solid Wedge Disc
- * Threaded End Connections

Cross Handle Option Available. See pg. 33

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 18202 5	1/4	-	80	0.46	38
6 70779 18203 2	3/8	-	60	0.42	27
6 70779 18204 9	1/2	-	50	0.58	30
6 70779 18205 6	3/4	-	50	0.82	42
6 70779 18206 3	1	-	20	1.22	26
6 70779 18207 0	1-1/4	-	20	1.86	38
6 70779 18208 7	1-1/2	-	15	2.50	39
6 70779 18220 9	2	-	10	4.21	42
6 70779 18225 4	2-1/2	-	6	7.03	44
6 70779 18230 8	3	-	4	8.82	37
6 70779 18240 7	4	-	1	16.40	18

207F Brass Gate Valve

- * 125# WSP
- * 200# WOG
- * Brass Body
- * Screw in Bonnet
- * Non-Rising Stem
- * Solid Wedge Disc
- * Solder End Connections

Cross Handle Option Available. See pg. 33

6 70779 17904 9	1/2	-	50	0.46	25
6 70779 17905 6	3/4	-	50	0.78	39
6 70779 17906 3	1	-	20	1.14	24
6 70779 17907 0	1-1/4	-	20	1.66	35
6 70779 17908 7	1-1/2	-	15	2.23	36
6 70779 17920 9	2	-	10	4.20	42

267 Brass Gate Valve

- * 200# WOG
- * Cast Brass Body
- * Non-Rising Stem
- * Solid Wedge Disc
- * Threaded End Connections
- * Inserted Bonnet

6 70779 26704 3	1/2	10	100	0.58	59
6 70779 26705 0	3/4	10	100	0.60	65
6 70779 26706 7	1	5	50	0.78	42
6 70779 26707 4	1-1/4	5	50	1.44	76
6 70779 26708 1	1-1/2	2	30	1.74	57
6 70779 26720 3	2	1	20	2.42	51
6 70779 26725 8	2-1/2	1	10	4.82	51
6 70779 26730 2	3	1	10	7.14	76
6 70779 26740 1	4	1	4	10.58	45

267CH Brass Gate Valve

- * 200# WOG
- * Cast Brass Body
- * Non-Rising Stem
- * Solid Wedge Disc
- * Threaded End Connections
- * Inserted Bonnet
- * Cross Handle

6 70779 26404 2	1/2	10	100	0.50	51
6 70779 26405 9	3/4	10	100	0.68	68
6 70779 26406 6	1	5	50	0.90	46
6 70779 26407 3	1-1/4	5	50	1.48	75
6 70779 26408 0	1-1/2	2	30	1.83	59
6 70779 26420 2	2	1	20	2.63	52

268 Brass Gate Valve

- * 200# WOG
- * Cast Brass Body
- * Solder Ends
- * Non-Rising Stem
- * Solid Wedge Disc
- * Inserted Bonnet

6 70779 26804 0	1/2	10	100	0.36	39
6 70779 26805 7	3/4	10	100	0.52	54
6 70779 26806 4	1	5	50	0.68	36
6 70779 26807 1	1-1/4	5	50	1.50	71
6 70779 26808 8	1-1/2	2	30	1.68	51
6 70779 26820 0	2	1	20	2.56	56

280B Bronze Non-Rising Gate Valve


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Inserted Bonnet
- * Non-Rising Stem
- * Solid Disc
- * MSS-SP-80

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 71191 1	1/2	-	60	0.60	37
6 70779 71192 8	3/4	-	50	0.92	48
6 70779 71193 5	1	-	45	1.41	72
6 70779 71194 2	1-1/4	-	25	2.23	57
6 70779 71195 9	1-1/2	-	25	3.24	79
6 70779 71196 6	2	-	12	4.63	56

208B Bronze Rising Gate Valve


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Inserted Bonnet
- * Rising Stem
- * Solid Disc
- * MSS-SP-80

6 70779 71174 4	1/2	-	72	0.33	25
6 70779 71175 1	3/4	-	36	0.40	18
6 70779 71176 8	1	-	40	0.81	34
6 70779 71177 5	1-1/4	-	20	1.14	24
6 70779 71178 2	1-1/2	-	18	1.56	29
6 70779 71179 9	2	-	6	2.18	14

211B Bronze Globe Valve


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Inserted Bonnet
- * Swivel Type Disc
- * MSS-SP-80

6 70779 71182 9	1/2	-	84	0.73	63
6 70779 71183 6	3/4	-	60	1.05	65
6 70779 71184 3	1	-	30	1.74	54
6 70779 71185 0	1-1/4	-	20	2.50	52
6 70779 71186 7	1-1/2	-	12	3.62	43
6 70779 71187 4	2	-	10	5.34	55

211BT Bronze Globe Valve (PTFE Seat)


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Inserted Bonnet
- * Swivel Type Disc
- * Virgin PTFE Seat
- * MSS-SP-80

6 70779 71313 7	1/2	-	84	0.73	63
6 70779 71314 4	3/4	-	60	1.09	65
6 70779 71315 1	1	-	30	1.72	54
6 70779 71316 8	1-1/4	-	20	2.50	52
6 70779 71317 5	1-1/2	-	12	3.62	43
6 70779 71318 2	2	-	10	5.61	56

236B Bronze Y Pattern Swing Check Valve


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Swing Check
- * "Y" Pattern
- * Brass Disc
- * MSS-SP-80
- * Threaded Ends

6 70779 71642 8	1/4	-	100	0.46	48
6 70779 71643 5	3/8	-	100	0.44	48
6 70779 71319 9	1/2	-	100	0.58	60
6 70779 71320 5	3/4	-	60	0.96	59
6 70779 71321 2	1	-	50	1.34	69
6 70779 71322 9	1-1/4	-	25	2.28	59
6 70779 71323 6	1-1/2	-	15	3.23	49
6 70779 71324 3	2	-	9	5.21	47
6 70779 71646 6	2-1/2	-	6	8.27	55
6 70779 71647 3	3	-	4	11.73	50

236BT Bronze Y Pattern Swing Check Valve (PTFE Seat)


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Swing Check
- * "Y" Pattern
- * Virgin PTFE Seat
- * MSS-SP-80

6 70779 71644 2	1/4	-	100	0.47	49
6 70779 71645 9	3/8	-	100	0.45	47
6 70779 71325 0	1/2	-	100	0.58	60
6 70779 71326 7	3/4	-	60	1.04	58
6 70779 71327 4	1	-	50	1.36	69
6 70779 71328 1	1-1/4	-	25	2.24	59
6 70779 71329 8	1-1/2	-	15	3.23	49
6 70779 71330 4	2	-	9	5.21	48
6 70779 71648 0	2-1/2	-	6	8.47	55
6 70779 71649 7	3	-	4	12.06	50

280 Bronze Gate Valve

- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Inserted Bonnet
- * Non-Rising Stem
- * Solid Disc
- * MSS-SP-80

++ Some size have limited availability

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 28402 6	1/4	-	120	0.71	91
6 70779 28403 3	3/8	-	120	0.66	85
6 70779 28404 0	1/2	-	120	0.77	98
6 70779 28405 7	3/4	-	80	1.17	100
6 70779 28406 4	1	-	50	1.76	94
6 70779 28407 1	1-1/4	-	35	2.45	92
6 70779 28408 8	1-1/2	-	25	3.53	94
6 70779 28420 0	2	-	18	5.36	102
6 70779 28425 5	2-1/2	-	8	12.15	103

207 Bronze Gate Valve

- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Solder Ends
- * Screw over Bonnet (1/2" - 2")
- * Inserted Bonnet (2-1/2" - 4")
- * Non-Rising Stem
- * Solid Wedge Disc

++ Some size have limited availability

6 70779 28704 1	1/2	-	100	0.55	58
6 70779 28705 8	3/4	-	70	0.82	60
6 70779 28706 5	1	-	50	1.12	59
6 70779 28707 2	1-1/4	-	35	1.63	60
6 70779 28708 9	1-1/2	-	25	2.31	60
6 70779 28720 1	2	-	15	3.75	59
6 70779 28725 6	2-1/2	-	8	6.48	55
6 70779 28730 0	3	-	1	9.68	11
6 70779 28740 9	4	-	1	23.04	25

208A Bronze Gate Valve

- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Inserted Bonnet
- * Rising Stem
- * Solid Disc
- * MSS-SP-80

6 70779 20803 9	3/8	-	80	0.88	76
6 70779 20804 6	1/2	-	80	0.97	84
6 70779 20805 3	3/4	-	60	1.26	82
6 70779 20806 0	1	-	40	1.94	84
6 70779 20807 7	1-1/4	-	25	2.73	74
6 70779 20808 4	1-1/2	-	18	3.95	77
6 70779 20820 6	2	-	12	5.90	76

204A Bronze Gate Valve

- * 150# WSP
- * 300# WOG
- * Bronze Body
- * Threaded Ends
- * Inserted Bonnet
- * Non-Rising Stem
- * Solid Disc
- * MSS-SP-80

6 70779 20403 1	3/8	-	120	0.68	87
6 70779 20404 8	1/2	-	72	0.84	63
6 70779 20405 5	3/4	-	60	1.21	79
6 70779 20406 2	1	-	36	1.44	54
6 70779 20407 9	1-1/4	-	24	2.42	72
6 70779 20408 6	1-1/2	-	18	3.83	63
6 70779 20420 8	2	-	12	5.69	74
6 70779 20425 3	2-1/2	-	8	11.73	100
6 70779 20430 7	3	-	4	17.40	77

298 Bronze Gate Valve

- * 150# WSP
- * 300# WOG
- * Bronze Body
- * Threaded Ends
- * Union Bonnet
- * Rising Stem
- * Solid Disc
- * MSS-SP-80

6 70779 29802 3	1/4	-	100	0.86	92
6 70779 29804 7	1/2	-	80	1.10	94
6 70779 29805 4	3/4	-	60	1.57	100
6 70779 29806 1	1	-	40	2.40	102
6 70779 29807 8	1-1/4	-	25	3.28	88
6 70779 29808 5	1-1/2	-	12	4.34	52
6 70779 29820 7	2	-	8	6.72	54

318A Bronze Gate Valve

- * 300# WSP
- * 1000# WOG
- * Bronze Body
- * Threaded Ends
- * Union Bonnet
- * Rising Stem
- * Solid Disc
- * MSS-SP-80

6 70779 31804 2	1/2	-	60	1.26	80
6 70779 31805 9	3/4	-	24	1.78	45
6 70779 31806 6	1	-	25	3.03	80
6 70779 31807 3	1-1/4	-	18	3.42	67
6 70779 31808 0	1-1/2	-	8	6.04	51
6 70779 31820 2	2	-	8	7.50	60

210 Bronze Globe Valve


- * 100# WSP
- * 150# WOG
- * Bronze Body
- * Threaded Ends
- * Swivel Type Disc

++ Some size have limited availability

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 21003 2	3/8	6	120	0.42	59
6 70779 21004 9	1/2	6	120	0.57	74
6 70779 21005 6	3/4	6	84	0.68	67
6 70779 21006 3	1	5	36	1.23	46
6 70779 21007 0	1-1/4	4	40	1.64	70
6 70779 21008 7	1-1/2	4	20	2.20	47
6 70779 21020 9	2	3	12	3.23	40
6 70779 21025 4	2-1/2	-	15	6.05	82

211 Bronze Globe Valve


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Inserted Bonnet
- * Swivel Type Disc
- * MSS-SP-80

++ Some size have limited availability

6 70779 21103 9	3/8	6	80	0.40	36
6 70779 21104 6	1/2	6	60	0.56	36
6 70779 21105 3	3/4	5	28	1.00	32
6 70779 21106 0	1	4	24	1.60	42
6 70779 21107 7	1-1/4	4	28	2.71	82
6 70779 21108 4	1-1/2	3	16	3.62	60
6 70779 21120 6	2	2	8	6.02	50

220 Bronze Globe Valve


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Union Bonnet
- * PTFE Disc
- * MSS-SP-80

6 70779 22003 1	3/8	6	48	0.74	37
6 70779 22004 8	1/2	6	40	0.82	37
6 70779 22005 5	3/4	5	60	1.37	82
6 70779 22006 2	1	4	20	1.76	38
6 70779 22007 9	1-1/4	4	16	2.62	45
6 70779 22008 6	1-1/2	3	8	3.61	31
6 70779 22020 8	2	2	6	6.02	39
6 70779 22025 3	2-1/2	-	1	10.00	10

221 Bronze Globe Valve


- * 150# WSP
- * 300# WOG
- * Bronze Body
- * Threaded Ends
- * Union Bonnet
- * PTFE Disc
- * MSS-SP-80

6 70779 22104 5	1/2	-	36	1.16	44
6 70779 22105 2	3/4	-	24	1.70	44
6 70779 22106 9	1	-	16	2.62	44
6 70779 22107 6	1-1/4	-	12	4.20	53
6 70779 22108 3	1-1/2	-	8	5.43	46
6 70779 22120 5	2	-	4	9.02	39

260A Bronze Angle Globe Valve


- * 150# WSP
- * 300# WOG
- * Bronze Body
- * Threaded Ends
- * Angle Type
- * Inserted Bonnet
- * Swivel Type Disc
- * MSS-SP-80

6 70779 26003 7	3/8	-	100	0.46	51
6 70779 26004 4	1/2	-	80	0.56	50
6 70779 26005 1	3/4	-	28	0.92	28
6 70779 26006 8	1	-	24	1.48	37
6 70779 26007 5	1-1/4	-	20	2.48	57
6 70779 26008 2	1-1/2	-	15	3.21	53
6 70779 26020 4	2	-	8	7.12	63
6 70779 26025 9	2-1/2	-	6	8.20	55
6 70779 26030 3	3	-	4	18.20	77

214 Bronze Globe Valve


- * 200# WSP
- * 400# WOG
- * Bronze Body
- * Threaded Ends
- * Union Bonnet
- * Stainless Steel 403 Disc
- * MSS-SP-80

++ Some size have limited availability

6 70779 21404 7	1/2	-	50	1.70	89
6 70779 21405 4	3/4	-	30	2.56	79
6 70779 21406 1	1	-	20	3.50	78
6 70779 21407 8	1-1/4	-	15	5.40	85
6 70779 21408 5	1-1/2	-	10	7.74	86
6 70779 21420 7	2	-	6	12.00	74

232 / 233 Brass In-line Check Valve

- * 200# WOG
- * Forged Brass Body
- * Threaded Ends
- * Spring Loaded
- * Horizontal or Vertical
- * NBR Seat
- * Low Noise Operation

232 = Threaded Ends

NBR Seat

233 = Solder Ends

FPM Seat

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
232					
6 70779 23204 1	1/2	-	180	0.24	45
6 70779 23205 8	3/4	-	72	0.34	25
6 70779 23206 5	1	-	72	0.52	40
6 70779 23207 2	1-1/4	-	48	0.76	38
6 70779 23208 9	1-1/2	-	24	1.04	28
6 70779 23220 1	2	-	12	1.60	21
233					
6 70779 23304 8	1/2	-	180	0.28	53
6 70779 23305 5	3/4	-	72	0.36	29
6 70779 23306 2	1	-	72	0.68	45
6 70779 23307 9	1-1/4	-	60	0.96	60
6 70779 23308 6	1-1/2	-	24	1.18	30
6 70779 23320 8	2	-	12	2.01	23

236F Brass Y Pattern Swing Check Valve

- * 125# WSP
- * 200# WOG
- * Brass Body
- * Swing Check
- * "Y" Pattern
- * Brass Disc
- * MSS-SP-80
- * Threaded Ends

6 70779 21704 8	1/2	-	80	0.58	48
6 70779 21705 5	3/4	-	60	0.92	56
6 70779 21706 2	1	-	30	1.33	41
6 70779 21707 9	1-1/4	-	24	2.23	52
6 70779 21708 6	1-1/2	-	18	3.24	57
6 70779 21720 8	2	-	10	4.60	48

238 Bronze Swing Check Valve

- * 150# WSP
- * 300# WOG
- * Bronze Body
- * Threaded Ends
- * "Y" Pattern
- * Bronze Disc
- * MSS-SP-80

6 70779 23803 6	3/8	-	120	0.48	61
6 70779 23804 3	1/2	-	80	0.60	52
6 70779 23805 0	3/4	-	48	1.00	50
6 70779 23806 7	1	-	36	1.63	61
6 70779 23807 4	1-1/4	-	24	2.42	60
6 70779 23808 1	1-1/2	-	16	3.43	54
6 70779 23820 3	2	-	8	5.21	45
6 70779 23825 8	2-1/2	-	4	9.86	41
6 70779 23830 2	3	-	3	14.74	46

360 Bronze Y Pattern Swing Check Valve

- * 300# WSP
- * 500# WOG
- * Bronze Body
- * Threaded Ends
- * "Y" Pattern
- * Bronze Disc
- * MSS-SP-80

6 70779 36004 1	1/2	-	100	0.92	95
6 70779 36005 8	3/4	-	48	1.20	56
6 70779 36006 5	1	-	40	2.20	90
6 70779 36007 2	1-1/4	-	24	3.02	70
6 70779 36008 9	1-1/2	-	16	3.80	63
6 70779 36020 1	2	-	8	6.00	50

246 Brass Swing Check Valve

- * 200# WOG
- * Brass Body
- * Threaded Ends
- * Horizontal "T" Pattern

6 70779 24604 8	1/2	12	120	0.38	49
6 70779 24605 5	3/4	10	80	0.52	45
6 70779 24606 2	1	5	60	0.84	53
6 70779 24607 9	1-1/4	5	40	1.28	54
6 70779 24608 6	1-1/2	5	30	1.76	55
6 70779 24620 8	2	2	24	2.54	65
6 70779 24625 3	2-1/2	2	12	4.78	75
6 70779 24630 7	3	1	6	7.36	42
6 70779 24640 6	4	1	4	12.75	55

380F / 387F Bronze Wye Strainer


- * 125# WSP / 200# WOG
- * Bronze Body
- * SS 20 Mesh Screen
- * With "clean out" tap & plug

380F = Threaded Ends
387F = Solder Ends

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
380F					
6 70779 70044 1	1/2	-	80	0.40	34
6 70779 70045 8	3/4	-	48	0.60	29
6 70779 70046 5	1	-	36	1.00	37
6 70779 70047 2	1-1/4	-	24	1.30	34
6 70779 70048 9	1-1/2	-	8	2.20	18
6 70779 70049 6	2	-	8	3.50	29
387F					
6 70779 70050 2	1/2	-	80	0.57	33
6 70779 70051 9	3/4	-	48	0.68	35
6 70779 70052 6	1	-	36	1.00	38
6 70779 70053 3	1-1/4	-	24	1.23	35
6 70779 70054 0	1-1/2	-	8	2.44	20
6 70779 70055 7	2	-	8	3.42	29

5071PP Poly Ball Valve


- * 200# WOG
- * Polypropylene Ball Valve
- * Threaded Ends
- * One Piece Body
- * Virgin PTFE Seats
- * Blow-Out Proof Stem
- * Wing Handle 1/2" to 1"
- * Lever Handle 1-1/4" to 2"

6 70779 57104 1	1/2	-	60	0.24	15
6 70779 57105 8	3/4	-	50	0.34	18
6 70779 57106 5	1	-	40	0.58	25
6 70779 57107 2	1-1/4	-	30	0.94	30
6 70779 57108 9	1-1/2	-	20	1.63	31
6 70779 57120 1	2	-	10	2.42	24

RW-302PP / RW-302PPBLUE Poly Hose Bibb


- * 125# CWP
- * Polypropylene Hose Bibb
- * Double "O" Ring Seals
- * Virgin PTFE Seats
- * Washerless Construction

RW-302PP					
6 70779 30204 1	1/2	-	60	0.18	11
6 70779 30205 8	3/4	-	50	0.16	10
RW-302PPBLUE					
6 70779 71593 3	1/2	-	60	0.18	11
6 70779 71594 0	3/4	-	50	0.16	10

RW-305PP PP Arctic Ball Hose Bibb


- * 125# CWP
- * Polypropylene Hose Bibb
- * MNPT x Hose
- * Double "O" Ring Seals
- * Virgin PTFE Seats
- * Blow-out proof stem
- * Washerless Construction

6 70779 30504 2	1/2	-	80	0.25	21
6 70779 30505 9	3/4	-	60	0.30	19

Sloop2 Electric Actuator


- * ISO 5211 connection
- * Double insulated cover
- * Max torque 11.1 ft-lb
- * working torque 5.90 ft-lb
- * Travel 90° in 60 seconds
- * Manual override, integral heater
- * F05 connection, stem connection
- * □0.35 inch or □0.43 inch
- * With 31.5 inch electric wire
- * Enclosure protection IP65
- * Power supply 50Hz/60Hz, 24VAC
- * 3 points control
- * Auxiliary dry open limit switch (Max 230 VC / 6A)

6 70779 72228 3	-	-	-	1.76	-
-----------------	---	---	---	------	---

RW-312 Brass No-Kink Hose

- * 125# CWP
- * Brass Body
- * No-Kink Spout
- * End Connection:
Male Thd. x Hose

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 31205 7	3/4	-	48	0.34	17

RW-315 Brass Ball Valve Hose Bibb

- * 125# CWP
- * Brass Body
- * Virgin PTFE Seats
- * End connection:
Male Thd. x Hose
(1/2" size also accepts copper pipe
for solder joint)
- * No-Kink Spout

6 70779 31304 1	1/2	-	80	0.40	34
6 70779 31305 8	3/4	-	60	0.48	30

RW-515 Qtr. Turn Brass Boiler Drain

- * 125# CWP
- * Brass Body
- * Female Thd x Hose

6 70779 70003 8	1/2	12	48	0.28	14
6 70779 70004 5	3/4	12	48	0.32	16

RW-275 Qtr. Turn Brass Sillcock

- * 125# CWP
- * Brass Body
- * Solder x Hose

6 70779 70007 6	1/2	12	48	0.34	18
6 70779 70008 3	3/4	12	48	0.36	18

RW-504 / RW-505 Brass Boiler Drain

RW-504

RW-505



- * 125# CWP
- * Brass Body
- * No-Kink Spout

RW-504 = Male Thd x Hose
RW-505 = Female Thd x Hose

RW-504

6 70779 49304 6	1/2	12	48	0.46	24
6 70779 49305 3	3/4	12	48	0.46	24

RW-505

6 70779 49205 6	3/4	12	48	0.46	23
-----------------	-----	----	----	------	----

RW-272 Brass Sillcock

- * 125# CWP
- * Brass Body
- * Female (IPS) x Hose

6 70779 27204 7	1/2	12	48	0.48	25
-----------------	-----	----	----	------	----

See pg. 17 for other Sizes

9101F Brass Steam Radiator Valve


- * 15# WSP
- * 60# WOG
- * Brass Body & Bonnet
- * EPDM Gasket
- * FNPT x Male Union

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 90904 2	1/2	10	60	0.82	52
6 70779 90905 9	3/4	6	48	1.12	57
6 70779 90906 6	1	4	36	1.36	53
6 70779 90907 3	1-1/4	2	24	2.08	53
6 70779 90908 0	1-1/2	2	16	3.08	52

9103F Brass Hot Water Vented Angle


- * 60# WOG
- * Brass Body & Bonnet
- * EPDM Gasket
- * Vented Disc
- * FNPT x Male Union

6 70779 90604 1	1/2	10	60	0.74	52
6 70779 90605 8	3/4	6	48	1.14	57
6 70779 90606 5	1	4	36	1.46	54
6 70779 90607 2	1-1/4	2	24	2.06	53

9105F Brass Hot Water Vented Angle


- * 60# WOG
- * Brass Body & Bonnet
- * EPDM Gasket
- * Vented Disc
- * Solder x Male Union

6 70779 90504 4	1/2	10	60	0.62	41
6 70779 90505 1	3/4	6	48	0.76	41

9150F / 9153F Brass Radiator Union Elbow


9150F



9153F

- * 60# WOG
- * Brass Body
- * FNPT x Male Union

9150F					
6 70779 71135 5	1/2	10	100	0.34	36
6 70779 71136 2	3/4	10	100	0.50	53
6 70779 71137 9	1	7	60	0.76	48
6 70779 71138 6	1-1/4	5	20	1.46	26

9153F					
6 70779 71420 2	1/2	10	150	0.34	42
6 70779 71421 9	3/4	10	100	0.54	58

9107 Bronze Radiator Gate Valve


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Wedge & Bonnet
- * Screw Over Bonnet
- * FNPT x Male Union

6 70779 90704 8	1/2	10	60	0.81	49
6 70779 90705 5	3/4	6	48	1.12	60
6 70779 90706 2	1	4	36	1.72	69
6 70779 90707 9	1-1/4	2	24	2.48	64
6 70779 90708 6	1-1/2	2	16	3.44	57

9107F Brass Radiator Gate Valve


- * 15# WSP
- * 200# WOG
- * Brass Body
- * Screw in Bonnet
- * Screw Over Bonnet
- * FNPT x MNPT Union

	1/2	10	60	0.81	49
	3/4	6	48	1.12	60
	1	4	36	1.72	69
	1-1/4	2	24	2.48	64
	1-1/2	2	16	3.44	57

5044F/5049F 5020 / 5023	Extension Stem (ES)	Wing "T" Handle	Replacement Handle	Memory Stop	Locking Lever Handle	Memory Stop for ES	S.S. Lever & Nut
1/4"	5044/49F-ES 1/4	5044/49F-WH 1/4	5044AB-LHK or 5049AB-LHK 1/4	5044/49F-MS 1/4	5044AB-LL or 5049AB-LL 1/4	5044/49F-MSES 1/4	-
3/8"	5044/49F-ES 1/4	5044/49F-WH 1/4	5044AB-LHK or 5049AB-LHK 1/4	5044/49F-MS 1/4	5044AB-LL or 5049AB-LL 1/4	5044/49F-MSES 1/4	-
1/2"	5044/49F-ES 1/2	5044/49F-WH 1/2	5044AB-LHK or 5049AB-LHK 1/2	5044/49F-MS 1/2	5044AB-LL or 5049AB-LL 1/2	5044/49F-MSES 1/2	5044/49F-SHK 1/2
3/4"	5044/49F-ES 1/2	5044/49F-WH 1/2	5044AB-LHK or 5049AB-LHK 1/2	5044/49F-MS 1/2	5044AB-LL or 5049AB-LL 1/2	5044/49F-MSES 1/2	5044/49F-SHK 1/2
1"	5044/49F-ES 1	5044/49F-WH 1	5044AB-LHK or 5049AB-LHK 1	5044/49F-MS 1	5044AB-LL or 5049AB-LL 1	5044/49F-MSES 1	5044/49F-SHK 1
1-1/4"	5044/49F-ES 1	5044/49F-WH 1	5044AB-LHK or 5049AB-LHK 1	5044/49F-MS 1	5044AB-LL or 5049AB-LL 1	5044/49F-MSES 1	5044/49F-SHK 1
1-1/2"	5044/49F-ES 1-1/2	5044/49F-WH 1-1/2	5044AB-LHK or 5049AB-LHK 1-1/2	5044/49F-MS 1-1/2	5044AB-LL or 5049AB-LL 1-1/2	5044/49F-MSES 1-1/2	5044/49F-SHK 1-1/2
2"	5044/49F-ES 1-1/2	5044/49F-WH 1-1/2	5044AB-LHK or 5049AB-LHK 1-1/2	5044/49F-MS 1-1/2	5044AB-LL or 5049AB-LL 1-1/2	5044/49F-MSES 1-1/2	5044/49F-SHK 1-1/2
2-1/2" - 4"	5044/49F-ES 2-1/2		5044AB-LHK or 5049AB-LHK 3	-	-	-	-

5592F/5595F	Extension Stem (ES)	Wing "T" Handle	Replacement Handle
1/4"	5592/95F-ES 1/4	-	-
3/8"	5592/95F-ES 1/4	-	-
1/2"	5592/95F-ES 1/2	5592AB-WH or 5595AB-WH 1/2	5592AB-LH or 5595AB-LH 1/2
3/4"	5592/95F-ES 1/2	5592AB-WH or 5595AB-WH 1/2	5592AB-LH or 5595AB-LH 1/2
1"	5592/95F-ES 1	5592AB-WH or 5595AB-WH 1	5592AB-LH or 5595AB-LH 1
1-1/4"	5592/95F-ES 1	5592AB-WH or 5595AB-WH 1	5592AB-LH or 5595AB-LH 1
1-1/2"	5592/95F-ES 1-1/2	-	-
2"	5592/95F-ES 1-1/2	-	-
2-1/2" - 4"	5592/95F-ES 2-1/2	-	-

5065	Compression Ferrule only	Compression Nut
1/2"	5065-FER 1/2	5065-CN 1/2
3/4"	5065-FER 3/4	5065-CN 3/4
1"	5065-FER 1	5065-CN 1

5070	Disassembly Tool
1/2" - 1"	5070-RT 1/2



Disassembly Tool



Extension Stem



Wing Handle



Locking Lever

206F / 207F	Regular Handwheel
1/2"	206/207ABF-H 1/2
3/4"	206/207ABF-H 1/2
1"	206/207ABF-H 1
1-1/4"	206/207ABF-H 1-1/4
1-1/2"	206/207ABF-H 2
2"	206/207ABF-H 2
2-1/2" - 3"	206/207ABF-H 2-1/2



Hand Wheel

267 / 268	Regular Handwheel
1/2"	267/268-HK 1/2
3/4"	267/268-HK 1/2
1"	267/268-HK 1
1-1/4"	267/268-HK 1-1/4
1-1/2"	267/268-HK 1-1/4
2"	267/268-HK 2
2-1/2"	267/268-HK 2-1/2
3"	267/268-HK 3
4"	267/268-HK 4



Hand Wheel

204A / 208A / 210 / 211 / 220 / 221	Regular Handwheel
1/2"	CALL FOR PRICING
3/4"	CALL FOR PRICING
1"	CALL FOR PRICING
1-1/4"	CALL FOR PRICING
1-1/2"	CALL FOR PRICING
2"	CALL FOR PRICING
2-1/2"	CALL FOR PRICING
3"	CALL FOR PRICING
4"	CALL FOR PRICING

5080B / 5080BSS Bronze Full Port Ball Valve


- * 600WOG/150WSP up to 2"
- * 400WOG/125WSP above 2"
- * B62-C83600 Bronze Cast Body
- * Threaded Ends
- * Virgin PTFE Seats
- * Gland Packing
- * Adjustable Packing Nut
- * Blow-Out Proof Stem
- * MS-SSP-110

5080B = Chrome-plated Ball

5080BSS = SS316 Ball & Stem
SS304 Handle

280B Bronze Gate Valve


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Inserted Bonnet
- * Non-Rising Stem
- * Solid Disc
- * MSS-SP-80

208B Bronze Gate Valve


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Inserted Bonnet
- * Rising Stem
- * Solid Disc
- * MSS-SP-80

211B / 211BT Bronze Globe Valve


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Inserted Bonnet
- * Swivel Type Disc
- * MSS-SP-80

211BT = Virgin PTFE Seat

236B / 236BT Bronze Check Valve


- * 125# WSP
- * 200# WOG
- * Bronze Body
- * Threaded Ends
- * Swing Check
- * "Y" Pattern
- * MSS-SP-80

236BT = Virgin PTFE Seat

UPC Code Size Inner
 pcs.

Pcs./
carton

Indiv. Wt.
(lbs.)

Wt./
Carton

5080B

6 70779 71595 7	3/8	-	80	0.32	28
6 70779 70657 3	1/2	-	80	0.59	49
6 70779 70658 0	3/4	-	60	0.86	53
6 70779 70659 7	1	-	45	1.41	65
6 70779 70660 3	1-1/4	-	30	2.20	67
6 70779 70661 0	1-1/2	-	24	3.16	77
6 70779 70662 7	2	-	15	4.94	76
6 70779 70883 6	2-1/2	-	6	10.24	63
6 70779 70884 3	3	-	4	14.57	60

5080BSS

6 70779 70663 4	1/2	-	80	0.59	49
6 70779 70664 1	3/4	-	60	0.86	53
6 70779 70665 8	1	-	45	1.41	65
6 70779 70666 5	1-1/4	-	30	2.20	67
6 70779 70667 2	1-1/2	-	24	3.16	77
6 70779 70668 9	2	-	15	4.94	76

6 70779 71191 1	1/2	-	60	0.60	37
6 70779 71192 8	3/4	-	50	0.92	48
6 70779 71193 5	1	-	45	1.41	72
6 70779 71194 2	1-1/4	-	25	2.23	57
6 70779 71195 9	1-1/2	-	25	3.24	79
6 70779 71196 6	2	-	12	4.63	56

6 70779 71174 4	1/2	-	72	0.33	25
6 70779 71175 1	3/4	-	36	0.40	18
6 70779 71176 8	1	-	40	0.81	34
6 70779 71177 5	1-1/4	-	20	1.14	24
6 70779 71178 2	1-1/2	-	18	1.56	29
6 70779 71179 9	2	-	6	2.18	14

211B

6 70779 71182 9	1/2	-	84	0.73	63
6 70779 71183 6	3/4	-	60	1.05	65
6 70779 71184 3	1	-	30	1.74	54
6 70779 71185 0	1-1/4	-	20	2.50	52
6 70779 71186 7	1-1/2	-	12	3.62	43
6 70779 71187 4	2	-	10	5.34	55

211BT

6 70779 71313 7	1/2	-	84	0.73	63
6 70779 71314 4	3/4	-	60	1.05	65
6 70779 71315 1	1	-	30	1.72	54
6 70779 71316 8	1-1/4	-	20	2.50	52
6 70779 71317 5	1-1/2	-	12	3.62	43
6 70779 71318 2	2	-	10	5.61	56

236B

6 70779 71642 8	1/4	-	100	0.46	48
6 70779 71643 5	3/8	-	100	0.44	48
6 70779 71319 9	1/2	-	100	0.58	60
6 70779 71320 5	3/4	-	60	0.96	59
6 70779 71321 2	1	-	50	1.34	69
6 70779 71322 9	1-1/4	-	25	2.28	59
6 70779 71323 6	1-1/2	-	15	3.23	49
6 70779 71324 3	2	-	9	5.21	47
6 70779 71646 6	2-1/2	-	6	8.27	55
6 70779 71647 3	3	-	4	11.73	50

236BT

6 70779 71644 2	1/4	-	100	0.47	49
6 70779 71645 9	3/8	-	100	0.45	47
6 70779 71325 0	1/2	-	100	0.58	60
6 70779 71326 7	3/4	-	60	1.04	58
6 70779 71327 4	1	-	50	1.36	69
6 70779 71328 1	1-1/4	-	25	2.24	59
6 70779 71329 8	1-1/2	-	15	3.23	49
6 70779 71330 4	2	-	9	5.21	48
6 70779 71648 0	2-1/2	-	6	8.47	55
6 70779 71649 7	3	-	4	12.06	50

380F Bronze Wye Strainer

- * 125# WSP / 200# WOG
- * Bronze Body
- * Threaded Ends
- * SS 20 Mesh Screen
- * With "clean out" tap & plug

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 70044 1	1/2	-	80	0.40	34
6 70779 70045 8	3/4	-	48	0.68	34
6 70779 70046 5	1	-	36	0.98	37
6 70779 70047 2	1-1/4	-	24	1.32	33
6 70779 70048 9	1-1/2	-	8	2.24	18
6 70779 70049 6	2	-	8	3.40	29

5019AB PEX x Flange Ball Valve

- * 400# WOG
- * DZR Lead Free Brass Body
- * Regular port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb (F1960) x Flange
- * Blow-Out Proof Stem
- * Double NBR O-Ring Packing
- * CSA B125.14, ASTM-F1960
- * AB1953, NSF/ANSI 61 & 372

6 70779 71159 1	2-1/2	-	3	11.84	36
6 70779 71160 7	3	-	3	16.08	50

7550 Carbon Steel Ball Valve

- * 2000# WOG
- * Carbon Steel 1-Piece Body
- * Threaded Ends, S.S. Trim
- * Reduced Port
- * Blow-Out Proof Stem
- * Reinforced PTFE Seats
- * MSS-SP-110

6 70779 75504 5	1/2	-	50	0.82	42
6 70779 75505 2	3/4	-	50	1.16	60
6 70779 75506 9	1	-	30	2.18	68
6 70779 75507 6	1-1/4	-	20	3.30	67
6 70779 75508 3	1-1/2	-	12	4.02	50
6 70779 75520 5	2	-	10	6.62	68

7770 Carbon Steel Ball Valve

- * 2000# WOG, 100# WSP
- * Carbon Steel 2-Piece Body
- * Threaded Ends, S.S. Trim
- * Regular Port
- * Blow-Out Proof Stem
- * Reinforced PTFE Seats
- * Adjustable Packing Gland
- * Mounting Pad, Locking Handle
- * MSS-SP-110, ANSI B16.34

6 70779 77702 3	1/4	-	50	0.74	38
6 70779 77703 0	3/8	-	50	0.82	43
6 70779 77704 7	1/2	-	50	1.14	55
6 70779 77705 4	3/4	-	30	1.58	50
6 70779 77706 1	1	-	20	2.64	55
6 70779 77707 8	1-1/4	-	20	4.21	86
6 70779 77708 5	1-1/2	-	10	6.42	66
6 70779 77700 7	2	-	8	9.83	81

5800L / 5800G Cast Iron Flange Ball Valve

- * 125 WSP
- * 200WOG
- * Full Port (up to 6")
- * Cast Iron Body
- * PTFE Coated Ball
- * MSS-SP-72
- * ANSI B16.10
- * Fed Spec. WW-V-35
- * ISO 5211 Mounting

5800L = Lever Handle
5800G = Gear Handle

5800L					
6 70779 70061 8	2	-	-	25	-
6 70779 70062 5	2-1/2	-	-	36	-
6 70779 70063 2	3	-	-	48	-
6 70779 70064 9	4	-	-	77	-
6 70779 70065 6	6	-	-	138	-
6 70779 71453 0	8	-	-	-	-
5800G					
6 70779 70069 4	2	-	-	48	-
6 70779 70070 0	2-1/2	-	-	59	-
6 70779 70071 7	3	-	-	71	-
6 70779 70072 4	4	-	-	100	-
6 70779 70073 1	6	-	-	173	-

4550 S.S. Ball Valve


- * 1000# WOG/ 100# WSP
- * 316 Stainless Steel 1-Piece Body
- * Threaded Ends
- * Reduced Port
- * Blow-Out Proof Stem
- * Reinforced PTFE Seats
- * Locking Handle
- * MSS-SP-110
- * ANSI B16.34

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 45502 0	1/4	2	100	0.14	16
6 70779 49503 7	3/8	2	100	0.28	31
6 70779 45504 4	1/2	2	100	0.38	42
6 70779 45505 1	3/4	2	100	0.64	65
6 70779 45506 8	1	2	50	0.98	12
6 70779 45507 5	1-1/4	2	50	1.56	80
6 70779 45508 2	1-1/2	2	25	2.02	52
6 70779 45520 4	2	2	20	3.00	61

4880 S.S. Ball Valve


- * 2000# WOG/ 100# WSP
- * 316 Stainless Steel 2-Piece Body
- * Threaded Ends
- * Full Port
- * Blow-Out Proof Stem
- * Reinforced PTFE Seats
- * Mounting Pad, Locking Handle
- * MSS-SP-110
- * ANSI B16.34

6 70779 48802 8	1/4	2	50	0.74	38
6 70779 48803 5	3/8	2	50	0.70	36
6 70779 48804 2	1/2	2	50	1.10	56
6 70779 48805 9	3/4	2	30	1.62	50
6 70779 48806 6	1	2	20	2.62	53
6 70779 48807 3	1-1/4	2	10	4.24	85
6 70779 48808 0	1-1/2	2	10	6.50	66
6 70779 48820 2	2	2	8	9.84	80

4660 S.S. Ball Valve


- * 1000# WOG/ 100# WSP
- * 316 Stainless Steel 3-Piece Body
- * Threaded Ends
- * Full Port
- * Blow-Out Proof Stem
- * Reinforced PTFE Seats
- * MSS-SP-110

6 70779 46602 6	1/4	-	50	0.92	47
6 70779 46603 3	3/8	-	50	0.82	45
6 70779 46604 0	1/2	-	50	1.32	70
6 70779 46605 7	3/4	-	40	2.00	84
6 70779 46606 4	1	-	20	2.40	53
6 70779 46607 1	1-1/4	-	10	4.24	44
6 70779 46608 8	1-1/2	-	8	5.40	47
6 70779 46620 0	2	-	6	8.64	55

880 Stainless Globe Valve


- * 200# WOG / WSP
- * 316 Stainless Steel Body & Trim
- * Inserted Bonnet
- * Swivel Type Disc

6 70779 88004 4	1/2	-	50	0.84	44
6 70779 88005 1	3/4	-	48	1.28	64
6 70779 88006 8	1	-	24	1.83	46
6 70779 88007 5	1-1/4	-	15	2.84	45
6 70779 88008 2	1-1/2	-	10	4.21	44
6 70779 88020 4	2	-	8	5.60	47

882 Stainless Gate Valve


- * 200# WOG / WSP
- * 316 Stainless Steel Body & Trim
- * Non-Rising Stem
- * Inserted Bonnet
- * Swivel Type Disc

6 70779 88204 8	1/2	-	50	0.90	47
6 70779 88205 5	3/4	-	48	1.16	58
6 70779 88206 2	1	-	24	1.68	43
6 70779 88207 9	1-1/4	-	16	2.42	40
6 70779 88208 6	1-1/2	-	10	3.99	42
6 70779 88220 8	2	-	10	4.64	48

884 Stainless Check Valve


- * 200# WOG / WSP
- * 316 Stainless Steel Body & Trim
- * Solid Disc

6 70779 88404 2	1/2	-	48	0.72	37
6 70779 88405 9	3/4	-	48	0.98	49
6 70779 88406 6	1	-	24	1.49	38
6 70779 88407 3	1-1/4	-	26	2.41	63
6 70779 88408 0	1-1/2	-	15	3.20	50
6 70779 88420 2	2	-	12	5.07	63

889 Stainless Strainer


- * 200# WOG / WSP
- * 316 Stainless Steel Body & Trim
- * Perforation Screen

6 70779 88904 7	1/2	-	60	0.52	33
6 70779 88905 4	3/4	-	48	1.32	64
6 70779 88906 1	1	-	27	1.96	54
6 70779 88907 8	1-1/4	-	18	2.04	38
6 70779 88908 5	1-1/2	-	12	2.54	32
6 70779 88920 7	2	-	6	4.12	26

381 Cast Iron Flanged Wye Strainer

- * 125# WSP
- * 200# WOG
- * Iron Body
- * Bolted Cover
- * SS Screen

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 38120 6	2	-	-	20	-
6 70779 38125 1	2-1/2	-	-	23	-
6 70779 38130 5	3	-	-	32	-
6 70779 38140 4	4	-	-	46	-
6 70779 38150 3	5	-	-	65	-
6 70779 38160 2	6	-	-	92	-
6 70779 38180 0	8	-	-	131	-
6 70779 38110 7	10	-	-	205	-
6 70779 38112 1	12	-	-	269	-

382 Cast Iron Flanged Wye Strainer w/ 3 TP ports

- * 125# WSP
- * 200# WOG
- * Iron Body
- * Bolted Cover
- * SS Screen
- * Plugged Ports

6 70779 71431 8	2-1/2	-	-	27	-
6 70779 71432 5	3	-	-	34	-
6 70779 71433 2	4	-	-	49	-
6 70779 71434 9	5	-	-	64	-
6 70779 71435 6	6	-	-	95	-
6 70779 71436 3	8	-	-	163	-

415 Iron NRS Gate Valve

- * 125# WSP
- * 200# WOG
- * Cast Iron Body
- * Flanged Ends (ANSI B16.5)
- * IBBM
- * Solid Disc
- * Non-Rising Stem (NRS)
- * MSS-SP-70

6 70779 41520 8	2	-	-	32	-
6 70779 41525 3	2-1/2	-	-	40	-
6 70779 41530 7	3	-	-	48	-
6 70779 41540 6	4	-	-	69	-
6 70779 41550 5	5	-	-	94	-
6 70779 41560 4	6	-	-	140	-
6 70779 41580 2	8	-	-	229	-
6 70779 41510 9	10	-	-	331	-
6 70779 41512 3	12	-	-	425	-

421 Iron OS&Y Gate Valve

- * 125# WSP
- * 200# WOG
- * Iron Body
- * Flanged Ends
- * IBBM, OS&Y
- * Rising Stem
- * Solid Disc
- * MSS-SP-70

6 70779 42020 9	2	-	-	33	-
6 70779 42025 4	2-1/2	-	-	45	-
6 70779 42030 8	3	-	-	53	-
6 70779 42040 7	4	-	-	82	-
6 70779 42050 6	5	-	-	97	-
6 70779 42060 5	6	-	-	140	-
6 70779 42080 3	8	-	-	232	-
6 70779 42010 0	10	-	-	362	-
6 70779 42012 4	12	-	-	475	-

400 Iron Globe Valve

- * 125# WSP
- * 200# WOG
- * Iron Body
- * Flanged Ends
- * IBBM, OS&Y
- * MSS-SP-85

6 70779 40020 4	2	-	-	34	-
6 70779 40025 9	2-1/2	-	-	44	-
6 70779 40030 3	3	-	-	50	-
6 70779 40040 2	4	-	-	85	-
6 70779 40050 1	5	-	-	141	-
6 70779 40060 0	6	-	-	165	-
6 70779 40080 8	8	-	-	270	-
6 70779 40010 5	10	-	-	444	-
6 70779 40012 9	12	-	-	649	-

435 Iron Swing Check Valve

- * 125# WSP
- * 200# WOG
- * Iron Body
- * Flanged Ends
- * IBBM, Bolted Cover
- * MSS-SP-71

6 70779 43520 6	2	-	-	25	-
6 70779 43525 1	2-1/2	-	-	39	-
6 70779 43530 5	3	-	-	47	-
6 70779 43540 4	4	-	-	79	-
6 70779 43550 3	5	-	-	124	-
6 70779 43560 2	6	-	-	158	-
6 70779 43580 0	8	-	-	267	-
6 70779 43510 7	10	-	-	425	-
6 70779 43512 1	12	-	-	491	-

442 Dual Plate Iron Check Valve


- * 150# WOG
- * Iron Body
- * Dual Plate
- * Wafer Style Body
- * Bronze Discs
- * NBR Seat

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 44220 4	2	-	-	3	-
6 70779 44225 9	2-1/2	-	-	4	-
6 70779 44230 3	3	-	-	7	-
6 70779 44240 2	4	-	-	11	-
6 70779 44250 1	5	-	-	15	-
6 70779 44260 0	6	-	-	20	-
6 70779 44280 8	8	-	-	33	-
6 70779 44210 5	10	-	-	54	-
6 70779 44212 9	12	-	-	116	-

445 Dual Plate Iron Check Valve


- * 150# WOG
- * Iron Body
- * Dual Plate
- * Wafer Style Body
- * Bronze Discs
- * EPDM Seat

6 70779 4422	2	-	-	3	-
6 70779 4422	2-1/2	-	-	4	-
6 70779 4423	3	-	-	7	-
6 70779 4424	4	-	-	11	-
6 70779 4425	5	-	-	15	-
6 70779 4426	6	-	-	20	-
6 70779 4428	8	-	-	33	-

452 Dual Plate Iron Check Valve


- * 150# WOG
- * Iron Body
- * Dual Plate
- * Wafer Style Body
- * Nickel Plated Ductile Iron Discs
- * NBR Seat

6 70779 45220 3	2	-	-	3	-
6 70779 45225 8	2-1/2	-	-	5	-
6 70779 45230 2	3	-	-	7	-
6 70779 45240 1	4	-	-	11	-
6 70779 45250 0	5	-	-	14	-
6 70779 45260 9	6	-	-	21	-
6 70779 45280 7	8	-	-	34	-
6 70779 45210 4	10	-	-	59	-
6 70779 45212 8	12	-	-	92	-

462 Dual Plate Iron Check Valve


- * 150# WOG
- * Iron Body
- * Dual Plate
- * Wafer Style Body
- * Stainless Steel Discs
- * NBR Seat

6 70779 46220 2	2	-	-	3	-
6 70779 46225 7	2-1/2	-	-	5	-
6 70779 46230 1	3	-	-	7	-
6 70779 46240 0	4	-	-	11	-
6 70779 46250 9	5	-	-	16	-
6 70779 46260 8	6	-	-	21	-
6 70779 46280 6	8	-	-	35	-
6 70779 46210 3	10	-	-	59	-
6 70779 46212 7	12	-	-	116	-

465 Dual Plate Iron Check Valve


- * 150# WOG
- * Iron Body
- * Dual Plate
- * Wafer Style Body
- * Stainless Steel Discs
- * EPDM Seat

6 70779 70768 6	2	-	-	4	-
6 70779 70769 3	2-1/2	-	-	5	-
6 70779 70770 9	3	-	-	7	-
6 70779 70771 6	4	-	-	11	-
6 70779 70772 3	5	-	-	14	-
6 70779 70773 0	6	-	-	20	-
6 70779 70774 7	8	-	-	38	-
6 70779 70775 4	10	-	-	61	-
6 70779 70776 1	12	-	-	116	-

9957W Ductile Iron Automatic Balancing Valve

- * Class 150
- * Ductile Iron Body
- * Test Points included
- * Flow range 25.4GPM-2156GPM

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 71276 5	2-1/2	-	-	12.0	
6 70779 71277 2	3	-	-	15.3	
6 70779 71278 9	4	-	-	24.5	
6 70779 71279 6	5	-	-	32.4	
6 70779 71280 2	6	-	-	39.6	
6 70779 71281 9	8	-	-	55.8	
6 70779 71282 6	10	-	-	79.2	
6 70779 71283 3	12	-	-	103.1	

9574P Iron Balancing Valve

- * 200# WOG
- * Cast Iron Body
- * Flanged Ends
- * Flat Face Flange
- * Variable Orifice Design
- * Includes 2 Brass Metering Points

6 70779 71638 1	2	-	-	18.3	
6 70779 95425 7	2-1/2	-	-	32.0	-
6 70779 95430 1	3	-	-	42.8	-
6 70779 95440 0	4	-	-	63.8	-
6 70779 95450 9	5	-	-	85.4	-
6 70779 95460 8	6	-	-	118	-
6 70779 95480 6	8	-	-	268	-
6 70779 95410 3	10	-	-	400	-
6 70779 95412 7	12	-	-	569	-
6 70779 72602 1	14	-	-	825	-
6 70779 72603 8	16	-	-	1123	-

HOW TO ORDER BUTTERFLY VALVES

Example	937	B	N	S	G
	↓	↓	↓	↓	↓
	(1)	(2)	(3)	(4)	(5)

(1) Type	(2) Disc Material	(3) Seat Material	(4) Stem Material	(5) Operator
937: Wafer	D: Ductile Iron	E: EPDM	S: 416 Stainless Steel	L: 10 Position Lever
938: Lug	B: Aluminum Bronze	N: NBR		G: Worm Gear
	M: 316 Stainless Steel			X: Bare Stem

937BESL Wafer style Butterfly Valve

- * 200 PSI
- * Wafer Type/Lever
- * Ductile Iron Body
- * Alum. Bronze Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 93020 6	2	-	-	8	-
6 70779 93025 1	2-1/2	-	-	9	-
6 70779 93030 5	3	-	-	10	-
6 70779 93040 4	4	-	-	12	-
6 70779 93050 3	5	-	-	19	-
6 70779 93060 2	6	-	-	19	-
6 70779 93080 0	8	-	-	32	-
6 70779 93010 7	10	-	-	46	-
6 70779 93012 1	12	-	-	69	-

937BESG Wafer style Butterfly Valve

- * 200 PSI Size 2" - 12"
- * 150 PSI Sizes 14" - Up
- * Wafer Type/Gear
- * Ductile Iron Body
- * Alum. Bronze Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 93120 3	2	-	-	17	-
6 70779 93125 8	2-1/2	-	-	17	-
6 70779 93130 2	3	-	-	19	-
6 70779 93140 1	4	-	-	23	-
6 70779 93150 0	5	-	-	26	-
6 70779 93160 9	6	-	-	27	-
6 70779 93180 7	8	-	-	47	-
6 70779 93110 4	10	-	-	62	-
6 70779 93112 8	12	-	-	89	-
6 70779 93114 2	14	-	-	118	-
6 70779 93116 6	16	-	-	228	-
6 70779 93118 0	18	-	-	270	-
6 70779 93122 7	20	-	-	359	-
6 70779 93124 1	24	-	-	606	-
	30 - 48	-	-		-

937BNSL Wafer style Butterfly Valve


- * 200 PSI Size
- * Wafer Type/Lever
- * Ductile Iron Body
- * Alum. Bronze Disc
- * NBR Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 93220 0	2	-	-	8	-
6 70779 93225 5	2-1/2	-	-	9	-
6 70779 93230 9	3	-	-	10	-
6 70779 93240 8	4	-	-	12	-
6 70779 93250 7	5	-	-	19	-
6 70779 93260 6	6	-	-	19	-
6 70779 93280 4	8	-	-	32	-
6 70779 93210 1	10	-	-	46	-
6 70779 93212 5	12	-	-	69	-

937BNSG Wafer style Butterfly Valve


- * 200 PSI Size 2" - 12"
- * 150 PSI Sizes 14" - Up
- * Wafer Type/Gear
- * Ductile Iron Body
- * Alum. Bronze Disc
- * NBR Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 93320 7	2	-	-	17	-
6 70779 93325 2	2-1/2	-	-	17	-
6 70779 93330 6	3	-	-	19	-
6 70779 93340 5	4	-	-	23	-
6 70779 93350 4	5	-	-	26	-
6 70779 93360 3	6	-	-	27	-
6 70779 93380 1	8	-	-	47	-
6 70779 93310 8	10	-	-	62	-
6 70779 93312 2	12	-	-	89	-
6 70779 93314 6	14	-	-	118	-
6 70779 93316 0	16	-	-	228	-
6 70779 93318 4	18	-	-	270	-
6 70779 93322 1	20	-	-	359	-
6 70779 93324 5	24	-	-	606	-
30 - 48					

937DNSL Wafer style Butterfly Valve


- * 200 PSI
- * Wafer Type/Lever
- * Ductile Iron Body
- * Ductile Iron Disc
- * NBR Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 93620 8	2	-	-	8	-
6 70779 93625 3	2-1/2	-	-	9	-
6 70779 93630 7	3	-	-	10	-
6 70779 93640 6	4	-	-	12	-
6 70779 93650 5	5	-	-	19	-
6 70779 93660 4	6	-	-	19	-
6 70779 93680 2	8	-	-	32	-
6 70779 93610 9	10	-	-	46	-
6 70779 93612 3	12	-	-	69	-

937DNSG Wafer style Butterfly Valve


- * 200 PSI Size 2" - 12"
- * 150 PSI Sizes 14" - Up
- * Wafer Type/Gear
- * Ductile Iron Body
- * Ductile Iron Disc
- * NBR Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 93720 5	2	-	-	17	-
6 70779 93725 0	2-1/2	-	-	17	-
6 70779 93730 4	3	-	-	19	-
6 70779 93740 3	4	-	-	23	-
6 70779 93750 2	5	-	-	26	-
6 70779 93760 1	6	-	-	27	-
6 70779 93780 9	8	-	-	47	-
6 70779 93710 6	10	-	-	62	-
6 70779 93712 0	12	-	-	89	-
6 70779 93714 4	14	-	-	118	-
6 70779 93716 8	16	-	-	228	-
6 70779 93718 2	18	-	-	270	-
6 70779 93722 9	20	-	-	359	-
6 70779 93724 3	24	-	-	606	-
30 - 48					

937DESL Wafer style Butterfly Valve


- * 200 PSI
- * Wafer Type/Lever
- * Ductile Iron Body
- * Ductile Iron Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 89020 3	2	-	-	8	-
6 70779 89025 8	2-1/2	-	-	9	-
6 70779 89030 2	3	-	-	10	-
6 70779 89040 1	4	-	-	12	-
6 70779 89050 0	5	-	-	19	-
6 70779 89060 9	6	-	-	19	-
6 70779 89080 7	8	-	-	32	-
6 70779 89010 4	10	-	-	46	-
6 70779 89012 8	12	-	-	69	-

937DESG Wafer style Butterfly Valve

- * 200 PSI Size 12"
- * 150 PSI Sizes 14" - Up
- * Wafer Type/Gear
- * Ductile Iron Body
- * Ductile Iron Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 92910 1	10	-	-	62	-
6 70779 93912 5	12	-	-	89	-
6 70779 93914 9	14	-	-	118	-
6 70779 93916 3	16	-	-	228	-
6 70779 93918 7	18	-	-	270	-
6 70779 93922 4	20	-	-	359	-
6 70779 93924 8	24	-	-	606	-

937MESG Wafer style Butterfly Valve

- * 200 PSI Size 2" - 12"
- * 150 PSI Sizes 14" - Up
- * Wafer Type/Gear
- * Ductile Iron Body
- * 316 Stainless Steel Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 93920 9	2	-	-	17	-
6 70779 93925 4	2-1/2	-	-	17	-
6 70779 93930 8	3	-	-	19	-
6 70779 93940 7	4	-	-	23	-
6 70779 93950 6	5	-	-	26	-
6 70779 93960 5	6	-	-	27	-
6 70779 93980 3	8	-	-	47	-
6 70779 93910 0	10	-	-	62	-
6 70779 93912 4	12	-	-	89	-
6 70779 93914 8	14	-	-	118	-
6 70779 93916 2	16	-	-	228	-
6 70779 93918 6	18	-	-	270	-
6 70779 93922 3	20	-	-	359	-
6 70779 93924 7	24	-	-	606	-
	30 - 48	-	-	-	-

937MESL Wafer style Butterfly Valve

- * 200 PSI Size
- * Wafer Type/Lever
- * Ductile Iron Body
- * 316 Stainless Steel Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 93820 2	2	-	-	8	-
6 70779 93825 7	2-1/2	-	-	9	-
6 70779 93830 1	3	-	-	10	-
6 70779 93840 0	4	-	-	12	-
6 70779 93850 9	5	-	-	19	-
6 70779 93860 8	6	-	-	19	-
6 70779 93880 6	8	-	-	32	-
6 70779 93810 3	10	-	-	46	-
6 70779 93812 7	12	-	-	69	-

938BESL Lug pattern Butterfly Valve

- * 200 PSI
- * Lug Type/Lever
- * Ductile Iron Body
- * Alum. Bronze Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 94020 5	2	-	-	10	-
6 70779 94025 0	2-1/2	-	-	12	-
6 70779 94030 4	3	-	-	12	-
6 70779 94040 3	4	-	-	18	-
6 70779 94050 2	5	-	-	22	-
6 70779 94060 1	6	-	-	26	-
6 70779 94080 9	8	-	-	42	-
6 70779 94010 6	10	-	-	64	-
6 70779 94012 0	12	-	-	101	-

938BESLAB Lug pattern Lead Free Butterfly Valve

- * 200 PSI
- * Lug Type/Lever
- * Ductile Iron Body
- * Alum. Bronze Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat
- * AB1953, NSF/ANSI 61 & 372

6 70779 71408 0	2	-	-	10	-
6 70779 71409 7	2-1/2	-	-	12	-
6 70779 71410 3	3	-	-	12	-
6 70779 71411 0	4	-	-	18	-
6 70779 71412 7	5	-	-	22	-
6 70779 71413 4	6	-	-	26	-
6 70779 71414 1	8	-	-	42	-
6 70779 71406 6	10	-	-	64	-
6 70779 71407 3	12	-	-	101	-

938BESG Lug pattern Butterfly Valve


- * 200 PSI Size 2" - 12"
- * 150 PSI Sizes 14" - Up
- * Lug Type/Gear
- * Ductile Iron Body
- * Alum. Bronze Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 94120 2	2	-	-	18	-
6 70779 94125 7	2-1/2	-	-	19	-
6 70779 94130 1	3	-	-	20	-
6 70779 94140 0	4	-	-	26	-
6 70779 94150 9	5	-	-	30	-
6 70779 94160 8	6	-	-	33	-
6 70779 94180 6	8	-	-	59	-
6 70779 94110 3	10	-	-	75	-
6 70779 94112 7	12	-	-	120	-
6 70779 94114 1	14	-	-	172	-
6 70779 94116 5	16	-	-	284	-
6 70779 94118 9	18	-	-	351	-
6 70779 94122 6	20	-	-	425	-
6 70779 94124 0	24	-	-	640	-
	30 - 48	-	-	-	-

938BESGAB Lug pattern Lead Free Butterfly Valve


- * 200 PSI Size 2" - 12"
- * 150 PSI Sizes 14" - Up
- * Lug Type/Gear
- * Ductile Iron Body
- * Alum. Bronze Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat
- * AB1953, NSF/ANSI 61 & 372

6 70779 72589 5	3	-	-	20	-
6 70779 72590 1	4	-	-	26	-
6 70779 72591 8	5	-	-	30	-
6 70779 71603 9	6	-	-	33	-
6 70779 71417 2	8	-	-	59	-
6 70779 71415 8	10	-	-	73	-
6 70779 71416 5	12	-	-	120	-
6 70779 72592 5	14	-	-	167	-

938BNSL Lug pattern Butterfly Valve


- * 200 PSI
- * Lug Type/Lever
- * Ductile Iron Body
- * Alum. Bronze Disc
- * NBR Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 94220 9	2	-	-	10	-
6 70779 94225 4	2-1/2	-	-	12	-
6 70779 94230 8	3	-	-	12	-
6 70779 94240 7	4	-	-	18	-
6 70779 94250 6	5	-	-	22	-
6 70779 94260 5	6	-	-	26	-
6 70779 94280 3	8	-	-	42	-
6 70779 94210 0	10	-	-	64	-
6 70779 94212 4	12	-	-	101	-

938BNSG Lug pattern Butterfly Valve


- * 200 PSI Size 2" - 12"
- * 150 PSI Sizes 14" - Up
- * Lug Type/Gear
- * Ductile Iron Body
- * Alum. Bronze Disc
- * NBR Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 94320 6	2	-	-	18	-
6 70779 94325 1	2-1/2	-	-	19	-
6 70779 94330 5	3	-	-	20	-
6 70779 94340 4	4	-	-	26	-
6 70779 94350 3	5	-	-	30	-
6 70779 94360 2	6	-	-	33	-
6 70779 94380 0	8	-	-	59	-
6 70779 94310 7	10	-	-	75	-
6 70779 94312 1	12	-	-	120	-
6 70779 94314 5	14	-	-	172	-
6 70779 94316 9	16	-	-	284	-
6 70779 94318 3	18	-	-	351	-
6 70779 94322 0	20	-	-	425	-
6 70779 94324 4	24	-	-	640	-
	30 - 48	-	-	-	-

938DESL Lug pattern Butterfly Valve


- * 200 PSI
- * Lug Type/Lever
- * Ductile Iron Body
- * Ductile Iron Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 88720 3	2	-	-	10	-
6 70779 88725 8	2-1/2	-	-	12	-
6 70779 88730 2	3	-	-	12	-
6 70779 88740 1	4	-	-	18	-
6 70779 88750 0	5	-	-	22	-
6 70779 88760 9	6	-	-	26	-
6 70779 88780 7	8	-	-	42	-
6 70779 88710 4	10	-	-	64	-
6 70779 88712 8	12	-	-	101	-

938DESG Lug pattern Butterfly Valve

- * 200 PSI Size up to 12"
- * 150 PSI Sizes 14" - Up
- * Lug Type/Gear
- * Ductile Iron Bod
- * Ductile Iron Disc
- * EPDM Seats
- * MSS-SP-67
- * 416 Stainless Steel Stem
- * ISO 5211 Mounting
- * Cartridge Seat

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 92710 7	10	-	-	75	-
6 70779 92712 1	12	-	-	120	-
6 70779 92714 5	14	-	-	172	-
6 70779 92716 9	16	-	-	284	-
6 70779 92718 3	18	-	-	351	-
6 70779 92722 0	20	-	-	425	-
6 70779 92724 4	24	-	-	640	-

938DNSL Lug pattern Butterfly Valve

- * 200 PSI
- * Lug Type/Lever
- * Ductile Iron Body
- * Ductile Iron Disc
- * NBR Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 94620 7	2	-	-	10	-
6 70779 94625 2	2-1/2	-	-	12	-
6 70779 94630 6	3	-	-	12	-
6 70779 94640 5	4	-	-	18	-
6 70779 94650 4	5	-	-	22	-
6 70779 94660 3	6	-	-	26	-
6 70779 94680 1	8	-	-	42	-
6 70779 94610 8	10	-	-	64	-
6 70779 94612 4	12	-	-	101	-

938DNSG Lug pattern Butterfly Valve

- * 200 PSI Size 2" - 12"
- * 150 PSI Sizes 14" - Up
- * Wafer Type/Gear
- * Ductile Iron Body
- * Ductile Iron Disc
- * NBR Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 94720 4	2	-	-	18	-
6 70779 94725 9	2-1/2	-	-	19	-
6 70779 94730 3	3	-	-	20	-
6 70779 94740 2	4	-	-	26	-
6 70779 94750 1	5	-	-	30	-
6 70779 94760 0	6	-	-	33	-
6 70779 94780 8	8	-	-	59	-
6 70779 94710 5	10	-	-	75	-
6 70779 94712 9	12	-	-	120	-
6 70779 94714 3	14	-	-	172	-
6 70779 94716 7	16	-	-	284	-
6 70779 94718 1	18	-	-	351	-
6 70779 94722 8	20	-	-	425	-
6 70779 94724 2	24	-	-	640	-
	30 - 48	-	-	-	-

938MESL Lug pattern Butterfly Valve

- * 200 PSI Size
- * Lug Type/Lever
- * Ductile Iron Body
- * 316 Stainless Steel Disc
- * EPDM Seats
- * 416 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 94820 1	2	-	-	10	-
6 70779 94825 6	2-1/2	-	-	12	-
6 70779 94830 0	3	-	-	12	-
6 70779 94840 9	4	-	-	18	-
6 70779 94850 8	5	-	-	22	-
6 70779 94860 7	6	-	-	26	-
6 70779 94880 5	8	-	-	42	-
6 70779 94810 2	10	-	-	64	-
6 70779 94812 6	12	-	-	101	-

938MESG Lug pattern Butterfly Valve

- * 200 PSI Size 2" - 12"
- * 150 PSI Sizes 14" - Up
- * Lug Type/Gear
- * Ductile Iron Body
- * 316 Stainless Steel Disc
- * EPDM Seats
- * 346 Stainless Steel Stem
- * MSS-SP-67
- * ISO 5211 Mounting
- * Cartridge Seat

6 70779 94920 8	2	-	-	18	-
6 70779 94925 3	2-1/2	-	-	19	-
6 70779 94930 7	3	-	-	20	-
6 70779 94940 6	4	-	-	26	-
6 70779 94950 5	5	-	-	30	-
6 70779 94960 4	6	-	-	33	-
6 70779 94980 2	8	-	-	59	-
6 70779 94910 9	10	-	-	75	-
6 70779 94912 3	12	-	-	120	-
6 70779 94914 7	14	-	-	172	-
6 70779 94916 1	16	-	-	284	-
6 70779 94918 5	18	-	-	351	-
6 70779 94922 2	20	-	-	425	-
6 70779 94924 6	24	-	-	640	-
	30 - 48	-	-	-	-

* Butterfly valves except for 938BESLAB and 938BESGAB not certified to NSF/ANSI 61 & 372 for potable water service

Cutter Electric Actuator for Butterfly Valve



- * ISO 5211 connection
- * Torque range: 443 to 4425 in-lb
- * 3 point control (ON/OFF)
- * 120V Supply
- * 2 adjustable limit switches
- * Electric connections 2 x 1/2" NPT
- * Enclosure protection: NEMA 4X
- * CSA certified
- * 115/120 VAC, 50/60 Hz or 24 VDC

Also available:
Modulating control option

UPC Code Size Inner pcs. Pcs./ carton Indiv. Wt. (lbs.) Wt./ Carton

115/120 VAC

6 70779 72248 1	2 - 3	-	-	22.0	-
6 70779 72249 8	4	-	-	22.0	-
6 70779 72250 4	5	-	-	22.0	-
6 70779 72251 1	6	-	-	22.0	-
6 70779 72252 8	8	-	-	33.0	-
6 70779 72253 5	10	-	-	33.0	-
6 70779 72254 2	12	-	-	34.5	-

24 VDC

6 70779 72286 3	2 - 3	-	-	22.0	-
6 70779 72287 0	4	-	-	22.0	-
6 70779 72288 7	5	-	-	22.0	-
6 70779 72289 4	6	-	-	22.0	-
6 70779 72290 0	8	-	-	33.0	-
6 70779 72291 7	10	-	-	33.0	-
6 70779 72292 4	12	-	-	34.5	-

Hovercraft Pneumatic Actuator for Butterfly Valve



- * ISO 5211 connection
- * Torque range:
Double acting = Up to 23500 in-lb
Spring return = Up to 10361 in-lb
- * Anodized aluminum body
- * Nickel plated steel pinion
- * Flange, end caps & pistons in die cast aluminum
- * Opening/closing $\pm 10^\circ$ travel regulation



HOVER-LSB-MS45-0



HOVER-SV-120-0

Double Acting

6 70779 72255 9	2 - 3	-	-	4.0	-
6 70779 72256 6	4	-	-	6.3	-
6 70779 72257 3	5 - 6	-	-	10.7	-
6 70779 72258 0	8	-	-	19.9	-
6 70779 72259 7	10	-	-	39.2	-
6 70779 72260 3	12 - 14	-	-	48.9	-
6 70779 72261 0	16	-	-	80.0	-
6 70779 72262 7	18	-	-	94.3	-
6 70779 72274 0	20	-	-	148	-

Spring Return

6 70779 72263 4	2 - 2.5	-	-	7.2	-
6 70779 72264 1	3	-	-	10.0	-
6 70779 72265 8	4	-	-	12.3	-
6 70779 72266 5	5 - 6	-	-	33.1	-
6 70779 72267 2	8	-	-	49.8	-
6 70779 72268 9	10	-	-	101	-
6 70779 72269 6	12	-	-	115	-
6 70779 72270 2	14	-	-	183	-
6 70779 72271 9	16	-	-	216	-

Limit Switch Box

6 70779 72275 7	-	-	-	1.86	-
-----------------	---	---	---	------	---

Solenoid Valve

6 70779 72276 4	-	-	-	0.80	-
-----------------	---	---	---	------	---

Find out how Actuators work



<https://redwhitevalvecorp.com/how-does-an-electric-valve-actuator-work/>



<https://redwhitevalvecorp.com/introduction-to-pneumatic-actuators/>

1500AB / 1515AB PP-R80 Ball Valve

- * 300# WOG
- * PP-R80 Body
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Blow-Out Proof Stem
- * O-ring Packing
- * AB1953 & NSF/ANSI 372
- * NSF/ANSI 14
- * 10-year Warranty
- * IAPMO/ANSI Z1157

1500AB = Polyfusion Ends

1515AB = Polyfusion x PEX (F1960)

**1501AB / 1516AB PP-RCT Ball Valve**

- * 300# WOG
- * PP-RCT Body
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Blow-Out Proof Stem
- * O-ring Packing
- * AB1953 & NSF/ANSI 372
- * NSF/ANSI 14
- * 10-year Warranty
- * IAPMO/ANSI Z1157

1501AB = Polyfusion Ends

1516AB = Polyfusion x PEX (F1960)

**1501PAB / 1516PAB PP-RCT Ball Valve**

- * 300# WOG
- * PP-RCT Body
- * Chrome-plated Ball
- * Virgin PTFE Seats
- * Blow-Out Proof Stem
- * O-ring Packing
- * AB1953 & NSF/ANSI 372
- * NSF/ANSI 14
- * 10-year Warranty
- * IAPMO/ANSI Z1157

1501PAB = Polyfusion Ends

1516PAB = Polyfusion x PEX (F1960)



UPC Code Size Inner pcs. Pcs./ carton Indiv. Wt. (lbs.) Wt./ Carton

1500AB

6 70779 70951 2	1/2	-	40	0.30	14
6 70779 70952 9	3/4	-	35	0.32	13
6 70779 70953 6	1	-	25	0.46	13
6 70779 70954 3	1-1/4	-	15	0.80	13
6 70779 70955 0	1-1/2	-	5	1.14	7
6 70779 70956 7	2	-	5	2.06	12

1515AB

6 70779 71034 1	1/2	-	30	0.40	13
6 70779 71035 8	3/4	-	25	0.48	13
6 70779 71036 5	1	-	20	0.70	15

1501AB

6 70779 71292 5	1/2	-	40	0.25	14
6 70779 71293 2	3/4	-	35	0.33	13
6 70779 71294 9	1	-	25	0.42	13
6 70779 71295 6	1-1/4	-	15	0.77	13
6 70779 71296 3	1-1/2	-	5	1.12	7
6 70779 71297 0	2	-	5	2.06	12
6 70779 71639 8	2-1/2	-	4	3.10	14
6 70779 71655 8	3	-	2	4.80	11

1516AB

6 70779 71299 4	1/2	-	30	0.40	13
6 70779 71300 7	3/4	-	25	0.48	13
6 70779 71301 4	1	-	20	0.70	15

1501PAB

6 70779 71292 5	1/2	-	40	0.25	14
6 70779 71293 2	3/4	-	35	0.33	13
6 70779 71294 9	1	-	25	0.42	13
6 70779 71295 6	1-1/4	-	15	0.77	13
6 70779 71296 3	1-1/2	-	5	1.12	7
6 70779 71297 0	2	-	5	2.06	12
6 70779 71639 8	2-1/2	-	4	3.10	14
6 70779 71655 8	3	-	2	4.80	11

1516PAB

6 70779 71299 4	1/2	-	30	0.40	13
6 70779 71300 7	3/4	-	25	0.48	13
6 70779 71301 4	1	-	20	0.70	15

9707R Pressure Independent Control Valve (PICV)


- * 300WOG
- * DZR Brass Body
- * Full-stroke Modulation Capability
- * Head-loss Measurement
- * Ready-to-mount On/Off & Modulating (0-10V)
- * Actuator Available (See pg. 54)
- * Multiple Connection Available
- * NPSM Male Ends

9707RL = Low Flow

9707T PICV + Tailpieces


- * 300WOG
- * DZR Brass Body
- * Full-stroke Modulation Capability
- * Head-loss Measurement
- * Ready-to-mount On/Off & Modulating (0-10V)
- * Actuator Available (See pg. 54)

Also available:
Tailpieces - FNPT, MNPT, Solder & PEX (F1960)

9707TL = Low Flow

9707IBV PICV + Isolation Ball Valve (99IBV)


- * 300WOG
- * DZR Brass Body
- * Full-stroke Modulation Capability
- * Head-loss Measurement
- * Ready-to-mount On/Off & Modulating (0-10V)
- * Actuator Available (See pg. 54)

Also available:
Tailpieces - FNPT, MNPT, Solder & PEX (F1960)
IBV End - FNPT & Solder

9707IBVL = Low Flow

9517AB / 9519AB LF Brass Balancing Valve


- * 300# WOG
- * DZR Lead Free Brass Body
- * Fixed Orifice Design
- * Venturi Insert
- * Precision Adjustable Handwheel
- * Integral Memory Stop
- * Multi-turn adjustment
- * AB1953, NSF/ANSI 61 & 372

9517AB = Threaded Ends

9519AB = Solder Ends

9517ABU = Ultra Low Flow

9517ABL = Low Flow

9519ABU = Ultra Low Flow

9519ABL = Low Flow

UPC Code Size Inner pcs. Pcs./ carton Indiv. Wt. (lbs.) Wt./ Carton

9707R					
6 70779 71310 6	1/2	-	24	0.93	24
6 70779 71312 0	3/4	-	12	1.32	18
6 70779 71354 0	1	-	10	2.49	25
6 70779 72062 3	1-1/4	-	5	4.45	25
9707RL					
6 70779 71311 3	1/2	-	24	0.93	24

9707T					
	1/2	-	-	1.28	-
UPC based on	1/2-H	-	-	1.78	-
Configuration	3/4	-	-	1.78	-
	3/4-H	-	-	3.00	-
	1	-	-	3.06	-
	1-H	-	-	-	-
	1-1/4	-	-	-	-

9707TL					
UPC based on	1/2	-	-	1.28	-
Configuration					

9707IBV					
	1/2	-	-	1.56	-
UPC based on	1/2-H	-	-	2.04	-
Configuration	3/4	-	-	2.10	-
	3/4-H	-	-	3.64	-
	1	-	-	3.70	-
	1-H	-	-	-	-
	1-1/4	-	-	-	-

9707IBVL					
UPC based on	1/2	-	-	1.56	-
Configuration					

9517AB					
6 70779 70215 5	1/2	-	20	1.24	27
6 70779 70216 2	3/4	-	15	1.42	23
6 70779 70217 9	1	-	10	1.68	19
6 70779 70218 6	1-1/4	-	10	2.74	30
6 70779 70219 3	1-1/2	-	10	3.44	37
6 70779 70220 9	2	-	5	4.74	26

9517ABU					
6 70779 70829 4	1/2	-	20	1.24	27

9517ABL					
6 70779 70828 7	1/2	-	20	1.24	27

9519AB					
6 70779 70221 6	1/2	-	20	1.16	26
6 70779 70222 3	3/4	-	15	1.28	22
6 70779 70223 0	1	-	10	1.52	17
6 70779 70224 7	1-1/4	-	10	2.46	27
6 70779 70225 4	1-1/2	-	10	3.12	33
6 70779 70226 1	2	-	5	4.54	24

9519ABU					
6 70779 70831 7	1/2	-	20	1.16	26

9519ABL					
6 70779 70830 0	1/2	-	20	1.16	26

9517 / 9519 Fixed Orifice Static Balancing Valve

- * 300# WOG
- * DZR Brass Body
- * Fixed Orifice Design
- * Venturi Insert
- * Precision Adjustable Handwheel
- * Integral Memory Stop
- * Multi-turn adjustment

9517 = Threaded Ends
9519 = Solder Ends

9517X = Ultra Ultra Low Flow
9517U = Ultra Low Flow
9517L = Low Flow

9517X = Ultra Ultra Low Flow
9519U = Ultra Low Flow
9519L = Low Flow

UPC Code Size Inner pcs. Pcs./ carton Indiv. Wt. (lbs.) Wt./ Carton

9517					
6 70779 95104 1	1/2	-	20	1.23	27
6 70779 95105 8	3/4	-	15	1.43	24
6 70779 95106 5	1	-	10	1.73	19
6 70779 95107 2	1-1/4	-	10	2.78	30
6 70779 95108 9	1-1/2	-	10	3.50	37
6 70779 95120 1	2	-	5	4.80	26
9517X					
6 70779 71460 8	1/2	-	20	1.23	27
9517U					
6 70779 71461 5	1/2	-	20	1.23	27
9517L					
6 70779 71462 2	1/2	-	20	1.23	27
9519					
6 70779 94504 0	1/2	-	20	1.16	25
6 70779 94505 1	3/4	-	15	1.34	22
6 70779 94506 4	1	-	10	1.55	18
6 70779 94507 1	1-1/4	-	10	2.53	27
6 70779 94508 8	1-1/2	-	10	3.16	34
6 70779 94520 0	2	-	5	4.46	24
9519X					
6 70779 71463 9	1/2	-	20	1.16	25
9519U					
6 70779 71464 6	1/2	-	20	1.16	25
9519L					
6 70779 71465 3	1/2	-	20	1.16	25

9517T-PP Fixed Orifice Static Balancing Valve

- * 300# WOG
- * DZR Brass Body
- * Fixed Orifice Design
- * Venturi Insert
- * Precision Adjustable Handwheel
- * Integral Memory Stop
- * Multi-turn adjustment
- * Union Ends with EzPress Tailpieces

Also available:
Tailpieces - FNPT, MNPT, Solder & PEX (F1960)

9517TU-PP = Ultra Low Flow
9517TL-PP = Low Flow

9517T-PP					
6 70779 71553 7	1/2	-	20	1.23	27
6 70779 71554 4	3/4	-	15	1.43	24
6 70779 71555 1	1	-	10	1.73	19
9517TU-PP					
6 70779 71556 8	1/2	-	20	1.23	27
9517TL-PP					
6 70779 71557 5	1/2	-	20	1.23	27

9517IBV Fixed Orifice Static Balancing Valve

- * 300# WOG
- * DZR Brass Body
- * Fixed Orifice Design
- * Venturi Insert
- * Precision Adjustable Handwheel
- * Integral Memory Stop
- * Multi-turn adjustment
- * Complete with Isolation Ball Valve (FNPT) & 1 Tailpiece (MNPT)

Also available:
Tailpieces - FNPT, Solder & EzPress PEX (F1960)
IBV End - FNPT, Solder, EzPress & PEX (F1960)

9517IBVU = Ultra Low Flow
9517IBVL = Low Flow

9517IBV					
UPC based on	1/2	-	-	2.08	-
Configuration	3/4	-	-	2.81	-
	1	-	-	3.39	-
9517IBVU					
UPC based on	1/2	-	-	2.08	-
Configuration					
9517IBVL					
UPC based on	1/2	-	-	2.08	-
Configuration					

9527AB / 9529AB LF Brass Balancing Valve


- * 300WOG
- * Lead Free Brass Body
- * On/Off Capability
- * Integral Memory Stop
- * Ready-to-mount On/Off Wax Actuator Available (See pg. 51)
- * AB1953, NSF/ANSI 61 & 372

9527AB = Threaded Ends

9529AB = Solder Ends

9527ABL = Low Flow

UPC Code Size Inner pcs. Pcs./carton Indiv. Wt. (lbs.) Wt./Carton

9527AB

6 70779 70319 0	1/2	-	20	0.78	17
6 70779 70320 6	3/4	-	20	0.98	21
6 70779 70304 6	1	-	20	1.40	30
6 70779 71162 1	1-1/4	-	18	2.06	40
6 70779 71163 8	1-1/2	-	15	2.60	42
6 70779 71164 5	2	-	15	3.68	59

9527ABL

6 70779 70303 9	1/2	-	20	0.78	17
-----------------	-----	---	----	------	----

9529AB

6 70779 70321 3	1/2	-	20	0.70	16
6 70779 70322 0	3/4	-	20	0.94	21

9574P Iron Balancing Valve


- * 200# WOG
- * Cast Iron Body
- * Flanged Ends
- * Flat Face Flange
- * Variable Orifice Design
- * Multi-turn adjustment
- * Includes 2 Brass Metering Points

6 70779 71638 1	2	-	-	18.3	-
6 70779 95425 7	2-1/2	-	-	32.0	-
6 70779 95430 1	3	-	-	42.8	-
6 70779 95440 0	4	-	-	63.8	-
6 70779 95450 9	5	-	-	85.4	-
6 70779 95460 8	6	-	-	118	-
6 70779 95480 6	8	-	-	268	-
6 70779 95410 3	10	-	-	400	-
6 70779 95412 7	12	-	-	569	-
6 70779 72602 1	14	-	-	825	-
6 70779 72603 8	16	-	-	1123	-

9407 Brass Metering Station


- * 300# WOG
- * DZR Brass Body
- * Threaded Ends
- * Fixed Orifice Design
- * High & Low Pressure Sampling Points

9407X = Ultra Ultra Low Flow

9407U = Ultra Low Flow

9407L = Low Flow

9407

6 70779 92504 2	1/2	-	50	0.54	29
6 70779 92505 9	3/4	-	50	0.64	34
6 70779 92506 6	1	-	30	0.82	27
6 70779 92507 3	1-1/4	-	30	1.10	35
6 70779 92508 0	1-1/2	-	20	1.28	28
6 70779 92520 2	2	-	15	1.74	28

9407X

6 70779 71479 0	1/2	-	50	0.54	29
-----------------	-----	---	----	------	----

9407U

6 70779 71480 6	1/2	-	50	0.54	29
-----------------	-----	---	----	------	----

9407L

6 70779 71481 3	1/2	-	50	0.54	29
-----------------	-----	---	----	------	----

9450A SS Orifice Plate


- * 600# WOG
- * 316 Stainless Steel
- * Dual Measuring Points
- * Wafer Style Flange

6 70779 70558 3	2-1/2	-	-	3.30	-
6 70779 70559 0	3	-	-	4.00	-
6 70779 70560 6	4	-	-	4.90	-
6 70779 70561 3	5	-	-	5.80	-
6 70779 70562 0	6	-	-	6.70	-
6 70779 70563 7	8	-	-	9.80	-
6 70779 70564 4	10	-	-	12.70	-
6 70779 70565 1	12	-	-	15.80	-

9907T Automatic Balancing Valve (ABV)

- * 300 #WOG
- * DZR Brass Body
- * Union Ends with FNPT Tailpieces
- * Flow range 0.32GPM-127GPM

Also available:
Tailpieces - MNPT, Solder,
EzPress & PEX (F1960)

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
	1/2	-	-	-	-
	1/2-H	-	-	-	-
UPC based on	3/4-L	-	-	-	-
Configuration	3/4	-	-	-	-
	1	-	-	-	-
	1-1/4-L	-	-	-	-
	1-1/4	-	-	-	-
	1-1/2	-	-	-	-
	2	-	-	-	-
	2-H	-	-	-	-

9907IBV ABV (9907T) + Isolation Ball Valve (99IBV)

- * 300# WOG
- * DZR Brass Body
- * Flow range 0.32GPM-127GPM
- * Union ends
- * Complete with Isolation Ball Valve (FNPT) and 1 Tailpiece (FNPT)

Also available:
Tailpieces - MNPT, Solder,
EzPress & PEX (F1960)
IBV End - Solder, EzPress & PEX (F1960)

	1/2	-	-	-	-
	3/4-L	-	-	-	-
UPC based on	3/4	-	-	-	-
Configuration	1	-	-	-	-
	1-1/4-L	-	-	-	-
	1-1/4	-	-	-	-
	1-1/2	-	-	-	-
	2	-	-	-	-
	2-H	-	-	-	-

9957W Ductile Iron Automatic Balancing Valve

- * Class 150
- * Ductile Iron Body
- * Test Points included
- * Flow range 25.4GPM-2156GPM

6 70779 71276 5	2-1/2	-	-	12.0
6 70779 71277 2	3	-	-	15.3
6 70779 71278 9	4	-	-	24.5
6 70779 71279 6	5	-	-	32.4
6 70779 71280 2	6	-	-	39.6
6 70779 71281 9	8	-	-	55.8
6 70779 71282 6	10	-	-	79.2
6 70779 71283 3	12	-	-	103.1

99IBV DZR Brass Isolating Ball Valve

- * 400# WOG
- * DZR Brass Body
- * Adjustable packing
- * Blow-out proof stem
- * Suitable for 9500, 9700 and 9900 Series Valves
- * FNPT x Swivel nut NPSM

Also available:
Body - Solder, EzPress & PEX (F1960)

6 70779 72051 7	1/2 x 3/4	-	-	0.51	-
6 70779 72052 4	1/2 x 1	-	-	0.55	-
6 70779 72053 1	3/4 x 1	-	-	0.71	-
6 70779 72054 8	3/4 x 1-1/4	-	-	0.77	-
6 70779 72055 5	1 x 1-1/4	-	-	1.21	-
6 70779 72056 2	1 x 1-1/2	-	-	1.26	-
6 70779 72057 9	1-1/4 x 1-1/2	-	-	1.62	-
6 70779 72058 6	1-1/4 x 2	-	-	1.86	-
6 70779 72059 3	1-1/2 x 2	-	-	2.53	-
6 70779 72060 9	1-1/2 x 2-1/2	-	-	3.02	-
6 70779 72061 6	2 x 2-1/2	-	-	4.04	-

95INSL / 99INSL Insulation for Balancing Valve**95INSL**

6 70779 70928 4	1/2	-	-	0.16	-
6 70779 70929 1	3/4	-	-	0.17	-
6 70779 70930 7	1	-	-	0.18	-
6 70779 70931 4	1-1/4	-	-	0.20	-
6 70779 70932 1	1-1/2	-	-	0.21	-
6 70779 70933 8	2	-	-	0.24	-

99INSL

6 70779 71269 7	3/4	-	-	0.10	-
6 70779 71270 3	1	-	-	0.12	-
6 70779 71271 0	1-1/4	-	-	0.18	-

CKA Automatic Balancing Valve Kit



DZR
Dezincification
Resistant

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
	1/2				
	3/4-L				
	3/4				
	1				
	1-1/4				
	1-1/2				
	2				
	2-H				

CKS Static Balancing Valve Kit



DZR
Dezincification
Resistant

	1/2-U				
	1/2-L				
	1/2				
	3/4				
	1				
	1-1/4				
	1-1/2				
	2				

CKM Static Balancing Valve Kit



	1/2-L				
	1/2				
	3/4				
	1				

CKP Pressure Independent Control Valve Kit



DZR
Dezincification
Resistant

	1/2-L				
	1/2				
	1/2-H				
	3/4				
	3/4-H				
	1				
	1-H				
	1-1/4				

CK Valve Kit



DZR
Dezincification
Resistant

	1/2				
	3/4				
	1				
	1-1/4				
	1-1/2				
	2				

WSHP Water Source Heat Pump Connection Kit

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
	1/2				
	3/4-L				
	3/4				
	1				
	1-1/4				
	1-1/2				
	2				
	2-H				

92HS Stainless Steel Hose

- * Fire Retardant Stainless Steel
- * MNPT End x Swivel MNPT End

Also available:
Swivel End - FNPT & Solder

12"					
6 70779 71573 5	1/2	-	-	0.54	-
6 70779 71574 2	3/4	-	-	0.89	-
6 70779 71575 9	1	-	-	1.53	-
6 70779 71576 6	1-1/4	-	-	2.57	-
6 70779 71577 3	1-1/2	-	-	3.48	-
6 70779 71578 0	2	-	-	5.14	-
18"					
6 70779 71579 7	1/2	-	-	0.67	-
6 70779 71580 3	3/4	-	-	1.09	-
6 70779 71581 0	1	-	-	1.75	-
6 70779 71582 7	1-1/4	-	-	3.07	-
6 70779 71583 4	1-1/2	-	-	4.04	-
6 70779 71584 1	2	-	-	5.89	-
24"					
6 70779 71585 8	1/2	-	-	0.74	-
6 70779 71586 5	3/4	-	-	1.29	-
6 70779 71587 2	1	-	-	2.02	-
6 70779 71588 9	1-1/4	-	-	3.53	-
6 70779 71589 6	1-1/2	-	-	4.54	-
6 70779 71590 2	2	-	-	6.55	-
36"					
6 70779 71597 1	1/2	-	-	0.96	-
6 70779 71598 8	3/4	-	-	1.68	-
6 70779 71599 5	1	-	-	2.71	-
6 70779 71600 8	1-1/4	-	-	4.59	-
6 70779 71601 5	1-1/2	-	-	5.65	-
6 70779 71602 2	2	-	-	7.87	-

92UN DZR Brass Union w/ Air Vent & Test Point

- * 400# WOG
- * DZR Brass Body
- * Tailpiece Reduction Available
- * FNPT x MNPT union end

Also available:
Body - Solder, EzPress
Tailpiece - FNPT, Solder & PEX (F1960)

6 70779 70427 2	1/2	-	-	0.50	-
6 70779 71428 9	3/4	-	-	0.57	-
6 70779 71429 6	1	-	-	0.64	-
6 70779 71430 2	1-1/4	-	-	1.01	-
6 70779 71431 9	1-1/2	-	-	1.59	-
6 70779 71432 6	2	-	-	1.90	-

92MU DZR Brass Union

- * 400# WOG
- * DZR Brass Body
- * Tailpiece Reduction Available
- * MNPT Body x MNPT Union

Also available:
Tailpiece - FNPT, Solder & PEX (F1960)

6 70779 71207 9	1/2	-	-	0.31	-
6 70779 71208 6	3/4	-	-	0.34	-
6 70779 71209 3	1	-	-	0.56	-
6 70779 71210 9	1-1/4	-	-	0.78	-
6 70779 71211 6	1-1/2	-	-	1.36	-
6 70779 71212 3	2	-	-	1.80	-

92ST / 92SS / 92SP DZR Brass Full Port Combo Strainer


- * 600# WOG
(400WOG for 1/2" & 3/4")
- * DZR Brass Body
- * Full Port
- * Stainless Steel Strainer (20 mesh)

92ST = FNPT x FNPT union end
92SS = Solder x Solder union end
92SP = EzPress x EzPress union end

Also available:
 Tailpieces - FNPT, MNPT, Solder & EzPress

UPC Code Size Inner pcs. Pcs./ carton Indiv. Wt. (lbs.) Wt./ Carton

92ST

6 70779 71541 4	1/2	-	-	1.46	-
6 70779 71542 1	3/4	-	-	1.75	-
6 70779 71543 8	1	-	-	2.50	-
6 70779 71544 5	1-1/4	-	-	3.73	-
6 70779 71545 2	1-1/2	-	-	6.03	-
6 70779 71546 9	2	-	-	7.37	-

92SS

6 70779 72043 2	1/2	-	-	1.46	-
6 70779 72044 9	3/4	-	-	1.75	-
6 70779 72045 6	1	-	-	2.50	-
6 70779 72046 3	1-1/4	-	-	3.73	-
6 70779 72047 0	1-1/2	-	-	6.03	-
6 70779 72048 7	2	-	-	7.37	-

92SP

6 70779 71547 6	1/2	-	-	1.40	-
6 70779 71548 3	3/4	-	-	1.70	-
6 70779 71549 0	1	-	-	2.39	-
6 70779 71550 6	1-1/4	-	-	3.56	-
6 70779 71808 8	1-1/2	-	-	6.03	-
6 70779 71809 5	2	-	-	7.37	-

92ST-BY / 92SS-BY / 92SP-BY Combo Strainer


- * 600# WOG
(400WOG for 1/2" & 3/4")
- * DZR Brass Body
- * Full Port
- * Stainless Steel Strainer (20 mesh)
- * 1/2" Bypass Port

92ST-BY = FNPT x FNPT union end
92SS-BY = Solder x Solder union end
92SP-BY = EzPress x EzPress union end

Also available:
 Tailpieces - FNPT, MNPT, Solder & EzPress

92ST-BY

6 70779 71551 3	1/2	-	-	1.52	-
6 70779 71552 0	3/4	-	-	1.88	-

92SS-BY

6 70779 71861 3	1/2	-	-	1.41	-
6 70779 71862 0	3/4	-	-	1.73	-

92SP-BY

6 70779 71863 7	1/2	-	-	1.45	-
6 70779 71864 4	3/4	-	-	1.80	-

92SEC Combo Strainer


- * 400# WOG
- * DZR Brass Body
- * Stainless Steel Strainer (20 mesh)
- * PEX (F1960) x PEX (F1960) union end

Also available:
 Tailpieces - FNPT, MNPT, Solder & EzPress

6 70779 72108 8	1/2	-	-	1.24	-
6 70779 72109 5	3/4	-	-	1.54	-
6 70779 72110 1	1	-	-	2.09	-

92T DZR Brass Tee


- * 400# WOG
- * DZR Brass Body
- * FNPT connection

6 70779 72205 4	1/2	-	-	0.20	-
6 70779 72206 1	3/4	-	-	0.33	-
6 70779 72207 8	1	-	-	0.56	-
6 70779 72208 5	1-1/4	-	-	0.84	-
6 70779 72209 2	1-1/2	-	-	0.98	-
6 70779 72210 8	2	-	-	1.49	-

92UBT / UBS / UBP DZR Brass Union Ball Valve

- * 600# WOG
- * DZR Brass Body
- * With 3 Plugged Ports
(Suitable for 95TP Test Point and/or
95MV Manual Vent)

92UBT = FNPT x FNPT union end
92UBS = Solder x Solder union end
92UBP = EzPress x EzPress union end

Also available:
 Tailpieces - FNPT, MNPT, Solder,
 EzPress & PEX (F1960)

UPC Code Size Inner
 pcs. carton (lbs.) Carton

92UBT

6 70779 71529 2	1/2	-	-	0.85	-
6 70779 71530 8	3/4	-	-	1.12	-
6 70779 71531 5	1	-	-	1.69	-
6 70779 71532 2	1-1/4	-	-	2.47	-
6 70779 71533 9	1-1/2	-	-	3.70	-
6 70779 71534 6	2	-	-	5.43	-

92UBS

6 70779 71855 2	1/2	-	-	0.76	-
6 70779 71856 9	3/4	-	-	1.00	-
6 70779 71857 6	1	-	-	1.55	-
6 70779 71858 3	1-1/4	-	-	2.31	-
6 70779 71859 0	1-1/2	-	-	3.45	-
6 70779 71860 6	2	-	-	4.55	-

92UBP

670779 71849 1	1/2	-	-	0.82	-
670779 71850 7	3/4	-	-	1.07	-
670779 71851 4	1	-	-	1.55	-
670779 71852 1	1-1/4	-	-	2.33	-
670779 71853 8	1-1/2	-	-	3.45	-
670779 71854 5	2	-	-	4.55	-

92UDT / UDS / UDP DZR Brass Union Ball Valve

- * 600# WOG
- * DZR Brass Body
- * With Drain Valve & Test Point

92UDT = FNPT x FNPT union end
92UDS = Solder x Solder union end
92UDP = EzPress x EzPress union end

Also available:
 Tailpieces - FNPT, MNPT, Solder,
 EzPress & PEX (F1960)

92UDT

6 70779 71535 3	1/2	-	-	1.16	-
6 70779 71536 0	3/4	-	-	1.44	-
6 70779 71537 7	1	-	-	2.00	-
6 70779 71538 4	1-1/4	-	-	2.78	-
6 70779 71539 1	1-1/2	-	-	4.02	-
6 70779 71540 7	2	-	-	5.74	-

92UDS

6 70779 71855 2	1/2	-	-	0.76	-
6 70779 71856 9	3/4	-	-	1.00	-
6 70779 71857 6	1	-	-	1.55	-
6 70779 71858 3	1-1/4	-	-	2.31	-
6 70779 71859 0	1-1/2	-	-	3.45	-
6 70779 71860 6	2	-	-	4.55	-

92UDP

6 70779 71849 1	1/2	-	-	0.82	-
6 70779 71850 7	3/4	-	-	1.07	-
6 70779 71851 4	1	-	-	1.55	-
6 70779 71852 1	1-1/4	-	-	2.33	-
6 70779 71853 8	1-1/2	-	-	3.45	-
6 70779 71854 5	2	-	-	4.55	-

241DV Brass Drain Valve

- * 600# WOG
- * Brass Body
- * Threaded Ends
- * Hose End with Cap

6 70779 70241 4	1/4	-	80	0.27	24
6 70779 70242 1	3/8	-	80	0.28	25
6 70779 70243 8	1/2	-	80	0.30	26

Balancing Valve Accessories

95MV

95TP/Red
95TP/Blue

95TP/SD



95TP-EX



- * 95MV = Manual vent
- * 95TP/red/blue =
Replacement metering point
- * 95TP-DC= Drain caps
- * 95TP-EX= Extension body for metering point
- * 95TP/SD= Metering point w/ drain

95MV

6 70779 72272 6	1/4	-	400	0.05	21
-----------------	-----	---	-----	------	----

95TP/Red

6 70779 92102 0	1/4	-	500	0.60	36
-----------------	-----	---	-----	------	----

95TP/Blue

6 70779 91902 7	1/4	-	500	0.60	36
-----------------	-----	---	-----	------	----

95TP-DC

6 70779 91702 3	1/4	-	1	0.20	-
-----------------	-----	---	---	------	---

95TP-EX

6 70779 89502 4	1/4	-	1	0.12	-
-----------------	-----	---	---	------	---

95TP-SD

6 70779 89302 0	1/4	-	1	0.36	-
-----------------	-----	---	---	------	---

9800 2&3-way Regulating BV w/ Act. Mount Pad


- * 600# WOG
- * DZR Brass Body
- * Blow-out Proof Stem
- * Max. differential Pressure: 50psig
- * ISO 5211 Actuator Connection
- * DVI 2173 Characteristic Control Curve

2-way: FNPT x FNPT
3-way: FNPT x FNPT x FNPT

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
9800 2-way					
	1/2				
	3/4				
	1				
	1-1/4				
	1-1/2				
	2				
9800 3-way					
	1/2				
	3/4				
	1				
	1-1/4				
	1-1/2				
	2				

Vaurien I / II Wax Actuator On/Off for Bal. Valve


- * 24VAC
- * Normally Closed Configuration
- * 2 Points Control
- * Wax Element
- * Enclosure protection: IP54

Vaurien I:
- Stroke Time: 3 to 5 min → 4mm
- Fits 9527AB, 9920 series up to 3/4"
- 100N

Vaurien II:
* Stroke Time: 3 to 5 min → 5mm
* Fits 9527AB, 9920 series 1"
* 125N

Vaurien I					
6 70779 70591 0	-	-	-	0.22	-
Vaurien II					
6 70779 70592 7	-	-	-	0.24	-

*** Normally Open Configuration also available ***
upon request

Vaurien M Modulating Actuator for PICV


- * 0-10V Control Signal
- * Max. Stroke 6.3mm
- * Auto Stroke Detection
- * Auto-zero Self Calibration
- * Enclosure Protection: IP43
- * Stroke Time: 8 sec/mm
- * 130N

6 70779 71381 6	-	-	10	0.44	5
-----------------	---	---	----	------	---

5930 24V Actuated Ball Valve


- * 600# WOG
- * Brass Full Port Body
- * Virgin PTFE Seats
- * EPDM Perox O-ring Packing
- * Blow-Out Proof Stem
- * 24VAC Electric Actuator

6 70779 72229 0	1/2	-	4	2.64	13
6 70779 72230 6	3/4	-	4	2.86	14
6 70779 72231 3	1	-	4	3.34	16
6 70779 72232 0	1-1/4	-	4	4.04	18
6 70779 72233 7	1-1/2	-	4	4.98	22
6 70779 72234 4	2	-	4	6.74	29

9380N High Capacity Automatic Air Vent

- * 200 CWP
- * 125 WSP
- * Cast iron Body
- * FNPT

UPC Code	Size	Inner pcs.	Pcs./ carton	Indiv. Wt. (lbs.)	Wt./ Carton
6 70779 70779 2	1/2	-	-	9.48	-
6 70779 70780 8	3/4	-	-	9.48	-
6 70779 70781 5	1	-	-	9.70	-

9390N Automatic Air Vent

- * 150 CWP
- * Brass Body
- * MNPT

6 70779 70777 8	1/4	-	-	0.34	-
6 70779 70778 5	1/2	-	-	0.34	-
6 70779 70885 0	3/8	-	-	0.34	-

T650RWV Digital Differential Pressure Manometer

- * 145 psig Measuring Range
- * Integral Pressure Measuring Sensor
- * Unlimited Different Valves Data Storage Capability
- * Interface to sensor through smart device

6 70779 72596 3	-	-	-	1.10	-
-----------------	---	---	---	------	---



<https://redwhitevalvecorp.com/what-is-a-differential-pressure-manometer/>

Learn more about Balancing Valves

<https://redwhitevalvecorp.com/balancing-valves-101/>

<https://redwhitevalvecorp.com/use-of-balancing-valves-in-hydronic-systems/>



PRODUCT WARRANTY

RED-WHITE VALVE CORP. provides this limited warranty for each product sold by the Company directly or by its authorized distributors against defects in material and workmanship under normal use for a period of three (3) years from the date of shipment from the Company. In the event of such defects within the warranty period, the Company will, at its option, replace or recondition the product without charge. To obtain warranty service, contact the Company by phone at 949-859-1010 or by email sales@rwwcusa.com. A purchase receipt or other proof of purchase will be required to obtain warranty service.

This shall constitute the exclusive remedy, and the Company shall not be responsible for any incidental or consequential damages, including, without limitation, damages or other costs resulting from labor charges, delays, or repairing or replacing other property which is damaged if this product does not work properly.

This limited warranty does not cover effects of vandalism, natural disasters, negligence of anyone other than the Company, fouling caused by foreign material, damage from adverse water conditions or chemicals, or any other circumstances over which the Company has no control. This limited warranty shall be invalidated by any abuse, misuse, misapplication, or improper installation and/or maintenance of the products. It is the responsibility of the user to determine whether the product is suited to a particular purpose or application.

Products sold by anyone other than authorized distributors carry no warranty.

The Company sells its products "as is" and, so far as consistent with applicable state law, disclaims all warranties express or implied except as provided in this explicit limited warranty.

TO THE FULLEST EXTENT ALLOWED BY LAW, RED-WHITE VALVE CORP. AND ITS EMPLOYEES, AGENTS, AND REPRESENTATIVES WILL NOT BE LIABLE TO ANY PERSON FOR ANY LIABILITY OR DAMAGES, WHETHER DIRECT, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL, ARISING FROM THE USE OF, OR INABILITY TO USE, THE COMPANY'S PRODUCTS

ECO-VALVE

The products depicted in this price list meet the requirements of California Health & Safety Code #116875 and Federal Reduction of Lead in Drinking Water Act. All products are third party certified to NSF/ANSI 61 & 372 and AB1953. Copies of third party certifications can be downloaded from our website at redwhitevalvecorp.com. Products are marked as meeting lead free requirements of NSF/ANSI 61 & 372. The California and Federal Law has defined lead free as having the water way of a product used in potable water applications contain less than .25% of lead per volume. The product can still contain lead but less than .25% per volume.

RECOMMENDATIONS AND INFORMATION

Most lead free products are more brittle than standard brass valves. Therefore threaded valves can be more susceptible to stress corrosion cracking when over torqued during installation. RED-WHITE VALVE CORP. recommends that on threaded valves the installer use minimal PTFE tape and use one full wrench turn after hand tightening connections. *Note: The presence of ammonia in process media will escalate stress corrosion cracking.

Dezincification may occur in specific geographic areas of North America. Dezincification occurs as a result of aggressive water that contains high amounts of minerals. RED-WHITE VALVE CORP. recommends that prior to installation that the contractor review local water mineral content to choose proper product for the application. Dezincification may occur on lead free or standard brass products.

Bronze and brass valves are not designed to be installed in underground applications without a specific coating to inhibit corrosion. Valves not coated in underground applications should be installed in a fully enclosed vault that protects the product from the corrosive elements that are present in these underground applications. Please refer to your local jurisdiction for information on the corrosive elements in your area.

Products sold by RED-WHITE VALVE CORP. that have not been third party certified to industry requirements will be marked as not certified for potable water applications. Products not certified to NSF/ANSI 61 & 372 or AB1953 will be marked as not meeting lead free requirements and should not be used in potable water applications.

Dezincification warning:

Brass valves maybe subject to dezincification in specific applications. Please refer to your municipal water supplier for compatibility with brass components.

Lead Free Valve package warning:

This product is certified to low lead standards of Federal Safe Drinking Water Act – SDWA 2011 (NSF61, NSF372 and California AB1953). These standards have determined lead free as less than .25% of wetted surface area.

Standard brass/bronze valves not suitable for potable water service:

This product does not meet the low lead requirements of Federal Safe Drinking Water Act – SDWA 2011 (NSF61, NSF372 nor California AB1953). Under the requirements of these standards the product is not suitable for potable water service. Product may contain more than .25% of lead a material known to cause birth defects and other reproductive harm.

TECHNICAL TERMS

WOG (Water, Oil & Gaseous mixes)

This industry rating indicates the maximum (non-shock) pressure of the valve body at ambient temperature. All joints (other than threaded) may limit this pressure due to their materials or designs. Note that the "G" in WOG does NOT refer to approval for Natural Gas, Propane, Gasoline or other regulated, flammable gas/liquid services. Valves that are suitable for Natural Gas, Propane, etc. will be marked with a separate CSA logo.

WSP (Working Steam Pressure)

This industry rating indicates the maximum (non-shock) steam pressure of a valve body per MSS-SP 80 and SP-110. All joints (other than threaded) may limit this pressure due to their materials or designs. This rating is independent from the WOG rating.

CWP (Cold Working Pressure)

This industry rating indicates the maximum (non-shock) cold water pressure at ambient temperatures of the valve body. All joints (other than threaded) may limit this pressure due to their materials or designs. Pressure measured in pounds per square inch (PSI).

The above information is a summary of the technical terms used on RED-WHITE VALVE CORP. products/literature. For detailed information, specific product applications, please contact RED-WHITE VALVE CORP.

Certain accessories may require a special order and lead time, contact RED-WHITE VALVE CORP. for the information.

MARKS OF EXCELLENCE



<https://redwhitevalvecorp.com/dzr-brass/>



ISO 9001 : 2015
Quality management



ISO 14001 : 2015
Environmental management

<https://redwhitevalvecorp.com/iso-9001-14001/>



CAD & BIM

<https://redwhitevalvecorp.com/category/>



WHERE TO BUY

<https://redwhitevalvecorp.com/where-to-buy/>



SOCIAL



<https://www.linkedin.com/company/red-white-valve-corp/>



TEL +1.800.222.RWVC(7982)
FAX +1.949.859.7200
redwhitevalvecorp.com



Leaders In Valve Technology



RED-WHITE VALVE CORP.